





PF50 AIR OPERATED DIAPHRAGM PUMP FOR TUNNELING

FLAP VALVE 2 INCH PORTS


PF50 PowerFlo Air Operated Diaphragm Pumps are versatile workhorses that can be used in a diverse range of pumping situations across numerous industries.

They operate on a simple mechanism involving few moving parts and are one of most reliable pumps on the market and are efficient and easily serviced. With the proper selection of pump materials they are capable of handling a wide variety of viscous fluids.

FEATURES

Self-priming, can handle viscous and abrasive products, and can run dry without damage. Additionally, due to the flap valve design they can pass solids up to the same size as the inlet and outlet ports.

SPECIFICATIONS & PERFORMANCE CURVE DATA

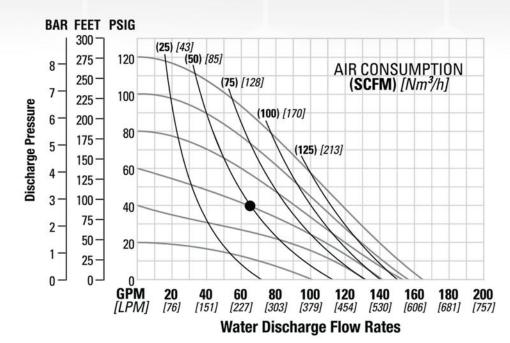

Net weight	27KG's
Air inlet	13mm
Fluid inlet	51mm
Fluid outlet	51mm
Suction Lift	7.62 meters
Maximum Particle Size	50mm
Wetted Material	Aluminum
Diaphragms	Hytrel
Flaps	Nitrile
Seals	Nitrile



ALSO AVAILABLE:

















