



*Blackmer*<sup>®</sup>

# S-SERIES TWIN SCREW PUMPS



**WE'RE ALL ABOUT EXPERIENCE**

[www.allpumps.com.au](http://www.allpumps.com.au)



# Twin Screw Pump S E R I E S

## A Safer, Greener, More Cost-Effective Pumping Solution

Blackmer, part of PSG®, a Dover company, is a global provider of innovative, high-quality industrial twin-screw and multi-phase pumps for the safe and efficient transfer of liquids. Blackmer is proud to offer the S Series. This durable screw pump line is perfectly suited to applications with the Process, Energy, Transport and Marine markets. Blackmer S Series pumps offer a wide range of highly customizable pumps and systems for the world's most demanding applications.

Our world-class distributor network ensures that you will have access to the pump you need when you need it. We are devoted to your business's success servicing your needs with world-class products, delivery and best of class expertise. Put us to the test today and contact your local distributor at [blackmer.com](http://blackmer.com)

## S Series Pumps are Ideally Suited For...

- Chemicals
- Caustics
- Adhesives
- Food and beverage
- Soap
- Petrochemicals
- Acids
- Polymers
- Crude oil
- Asphalt
- Diesel
- Seawater
- Lube oil
- Kerosene
- Oilfields
- Residuals
- Bulk transfer
- Loading/unloading
- Terminals
- Shipping
- Bilge and ballast
- Fire-suppression



## How it Works


Blackmer Twin Screw Pumps are rotary, positive displacement pumps capable of handling various clean liquids that contain no solids. The pump is composed of two sets of opposed screws. During pump operation, the screws on the two shafts are engaged and form a sealed cavity with the surrounding pump casing. The pumped liquid is shifted axially as the screw shafts turn and steadily and constantly convey the liquid to the center of the pump where the discharge port is located. Since hydraulic forces on two screws are opposite and equal, the hydraulic axial stress on shafts is automatically balanced.

The special profile of the screw flanks with patented technology can ensure fluids pushed with high efficiency, nearly pulsation-free, continuation and good NPSH-values.

Double-array ball bearing can offset against balanced axial power.

Relief valve installation can realize overload protection.

With WTG pumps, the timing gear is adopted to transfer the torque from power screw to idler screw, ensuring no metallic contact and dynamic transfer between the screws, reliable rotation and no danger to the pump even when dry-running for a short time.

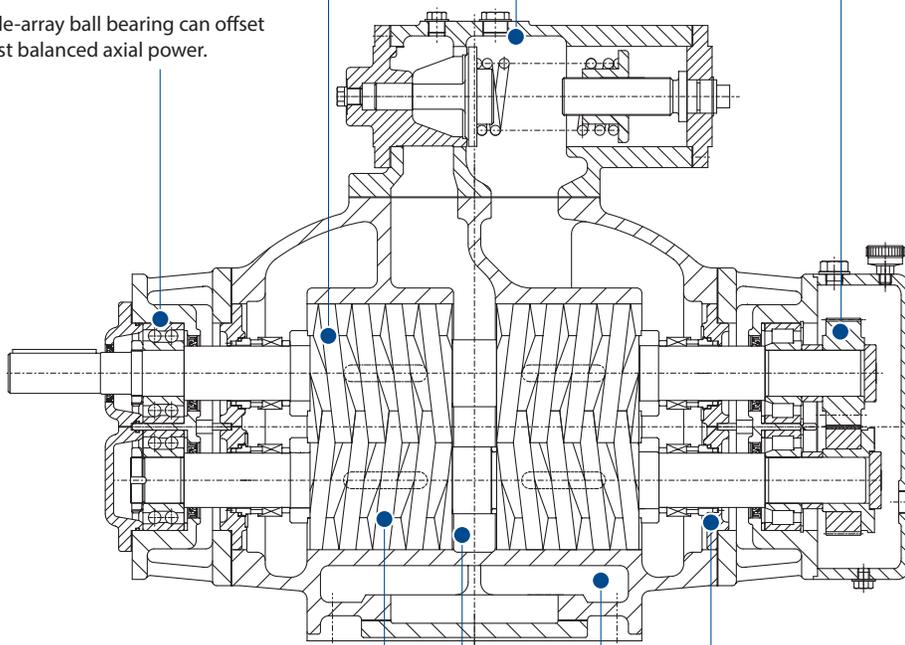

Separate construction between shaft and screw allows for a choice of materials for each.

Axial forces are balanced through double-entry screws.

The single mechanical seal is lubricated by pumped medium.

Heating of the pump foot is by means of vapor or transfer-heat oil.



TECHNOLOGY: SCREW

## WTG Series Twin Screw with Timing Gears

Blackmer's Twin Screw Pumps are offered with a double-suction design configuration. Twin screw pumps with timing gear (WTG) transmissions are perfectly suited for transferring low-lubricity fluids, or even abrasive media. The WTG pump series offers no metal contact between the hydraulic components and automatic axial balancing. Blackmer WTG Series pumps can be applied in a variety of different operating conditions with fluids that include, but are not limited to: corrosive and non-corrosive, low or high viscosities, clean or abrasive.

### Applications

- Petroleum
- Petrochemical
- Refineries
- Chemicals
- Storage and transportation
- Shipping
- Oil terminals
- Food and beverage
- Lubricating oil

### Features and Benefits:

- Low noise
- Overload protection
- Nearly pulsation-free
- Increased reliability
- Direct drive
- No fluid agitation
- No emulsified shear
- Suitable for a wide range of viscosities

### Certifications & Associations:



TECHNOLOGY: SCREW

## 2HE Horizontal General Twin Screw Pumps, WTG

The 2HE series is designed for conveying lubrication mediums. This series is a double-suction, self-priming Twin Screw pump with internal bearings and timing gears. With only one seal, it is easy to maintain and is more reliable. It can replace a Triple Screw pump at larger flow conditions.

### Applications

- Petroleum
- Petrochemical
- Lubricating oil
- Storage and transportation
- Loading/unloading

### Features and Benefits:

- Meshed power screw shaft and idle screw shaft in the pump casing form sealed chambers
- Torque is safely transferred by the timing gears
- No metal contact
- Convenient to change the location of the suction and discharge

### Technical Data:

- Pump Casing: Cast iron/ductile iron/cast steel/cast stainless steel
- Shaft: Alloy steel/stainless steel
- Screws: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Grey cast iron
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN300
- Two casing constructions to select:
  1. Side inlet, side outlet
  2. Side Inlet, up outlet

### Certifications & Associations:



2HE Horizontal General Twin Screw Pump

TECHNOLOGY: SCREW

## 2HC Twin Screw Pumps, WTG

The 2HC series is designed for marine applications where space is highly confined. Its compact, lightweight design can be used to transfer liquid without solid contents, including lubricating or non-lubricating liquids, low- or high-viscosity liquids, and corrosive liquids. It features a high flow rate, strong self-suction capability, smooth operation, and is simple to operate and maintain.

### Applications

- Petrochemical
- Chemicals
- Oil terminals
- Shipping

### Features and Benefits:

- Meshed power screw shaft and idle screw shaft in the pump casing form sealed chambers
- Torque is safely transferred by the timing gears
- No metal-to-metal contact
- Convenient to change the location of the suction and discharge

### Technical Data:

- Pump Casing: Cast iron/ductile iron/cast steel/cast stainless steel
- Shaft: Alloy steel/stainless steel
- Screws: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Grey cast iron
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN125-DN300

### Certifications & Associations:



2HC Twin Screw Pump, WTG

TECHNOLOGY: SCREW

## 2HM Horizontal General Twin Screw Pumps, WTG

These double-suction, self-priming twin screw pumps have external bearings and timing gear transmission. They are especially suitable for the delivery of various fluids in a wide range of viscosities that are free of solid substances or with a little abrasiveness and at a moderate temperature.

### Applications

- Petrochemical
- Chemicals
- Paint and coatings
- Oil terminals
- Storage and transportation
- Food and beverage
- Loading/unloading
- Shipping

### Features and Benefits:

- Meshed power screw shaft and idle screw shaft in the pump casing form sealed chambers
- Torque is safely transferred by the timing gears
- No metal-to-metal contact
- Convenient to change the location of the suction and discharge

### Technical Data:

- Pump Casing: Cast iron/ductile iron/cast steel/cast stainless steel
- Shaft: Alloy steel/stainless steel
- Screws: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Grey cast iron
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN50-DN300

### Certifications & Associations:



2HM Horizontal General Twin Screw Pump, WTG



2VM Vertical General Twin Screw Pumps, WTG

TECHNOLOGY: SCREW

## 2VM Vertical General Twin Screw Pumps, WTG

### Applications

- Suitable for handling various media without solids, including various oil products, chemical products and high-polymer media
- Also suitable for clean liquids with entrained gas content less than 60%
- Primarily used in ship-building and other applications where installation space is limited

### Technical Data:

- Pump Casing: Grey cast iron/ductile iron/cast steel/cast stainless steel
- Shaft: Alloy steel/stainless steel;
- Screw: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Grey cast iron/carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN300



2VE Vertical General Twin Screw Pumps, WTG

TECHNOLOGY: SCREW

## 2VE Vertical General Twin Screw Pumps, WTG

### Applications

- Mainly used in ship-building and other applications where installation space is limited
- Delivers various oil products with lubricating qualities and no solids

### Technical Data:

- Pump Casing: Grey cast iron/ductile iron/cast steel/cast stainless steel;
- Shaft: Alloy steel/stainless steel
- Screw: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Grey cast iron
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN300



2VR Vertical General Twin Screw Pumps, WTG

TECHNOLOGY: SCREW

## 2VR Vertical Twin Screw Pumps, WTG

### Applications

- Especially suitable for the delivery of various fluids that are free of solid substances or with a little abrasiveness at higher temperature, or the fluid needs to be heated
- Primarily used in ship-building and other applications where installation space is limited

### Technical Data:

- Pump Casing: Carbon steel/stainless steel
- Shaft: Alloy steel/stainless steel
- Screw: Ductile iron/alloy steel/stainless steel
- Bearing Housing: Carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN500

TECHNOLOGY: SCREW

## 2HR Horizontal, High-Temperature, High-Viscosity Twin Screw Pumps, WTG

### Applications

- Installed in applications where the median temperature is much higher than 120°C (248°F) or needs to be heated to maintain high temperatures
- Suitable for applications where the viscosity is ultra-high and can accept a wide range of mechanical seal types
- This pump casing construction is suitable for applications requiring heating jacket

### Technical Data:

- Pump Casing: Carbon steel/stainless steel
- Liner: Ductile iron/nickel cast iron
- Shaft: Alloy steel/stainless steel
- Screws: Alloy steel/stainless steel
- Bearing Housing: Grey cast iron/carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN500



TECHNOLOGY: SCREW

## 2HH High-Pressure Twin Screw Pumps, WTG

### Applications

- Used as a long-distance delivery pump for high-pressure applications or as main filling pumps for high-pressure units
- Suitable to deliver various fluids with viscosities higher than 100 mm<sup>2</sup>/s (cSt)

### Technical Data:

- Pump Casing: Carbon steel/stainless steel
- Liner: Ductile iron/nickel cast iron
- Shaft: Alloy steel/stainless steel
- Screws: Alloy steel/stainless steel
- Bearing Housing: Carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN300





TECHNOLOGY: SCREW

## 2H Single-End Twin Screw Pumps, WTG

### Applications

- Especially suitable for the small capacity and quick flashing applications where operating pressure is up to 16.0 bar (230 psi) and capacity is up to 40 m<sup>3</sup>/h (180 gpm)
- Suitable for various low-, middle- and high-viscosity fluids without solids
- Pump can be provided in mobile configurations, whether or not the medium is lubricating or corrosive

### Technical Data:

- Pump Casing: Grey cast iron/ ductile iron/stainless steel
- Shaft: Alloy steel/stainless steel
- Screws: Ductile iron/alloy steel/ stainless steel
- Bearing Housing: Grey cast iron
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN50-DN80

## Twin Screw Pumps

| Series  | Capacity          |           | Diff. Pressure |           | Viscosity                | Max. Temperature |     |
|---------|-------------------|-----------|----------------|-----------|--------------------------|------------------|-----|
|         | m <sup>3</sup> /h | gpm       | bar            | psi       | mm <sup>2</sup> /s (cSt) | °C               | °F  |
| 2HM/2VM | 2-2,500           | 10-11,000 | up to 40       | up to 580 | 0.5-200,000              | 120              | 248 |
| 2HR/2VR | 2-2,500           | 10-11,000 | up to 40.0     | up to 580 | 0.5-200,000              | 350              | 662 |
| 2HE/2VE | 2-2,500           | 10-11,000 | up to 25.0     | up to 360 | 20-3,000                 | 100              | 212 |
| 2HH     | 10-1,000          | 50-4,400  | up to 60.0     | up to 870 | 1-10,000                 | 120              | 248 |
| 2HC     | 35-750            | 150-3,300 | up to 16.0     | up to 230 | 1-10,000                 | 120              | 248 |
| 2H      | 1-40              | 5-180     | up to 16.0     | up to 230 | 1-100,000                | 100              | 212 |

TECHNOLOGY: SCREW

## NTG Series Twin Screw Pumps

The twin screw non-timing gear (NTG) pumps are a single-suction design. The axial hydraulic force on the components is compensated by a balance piston. Metal contact exists between the screw profiles; however, there is no metal contact between the screws and casing. The NTG series pumps are especially suitable to deliver various lubricating fluids with high viscosity, e.g., bitumen and residual oil, at medium or high temperatures.


### Applications

- Asphalt
- Heavy fuel oil
- Petrochemical
- Chemical fiber
- Chemicals
- Oil terminals
- Lubricating oil
- Shipping

### Features and Benefits:

- Low noise
- Low pulsation reliability
- No fluid agitation
- No emulsified shear
- Suitable for wide range of viscosities

### Certifications & Associations:

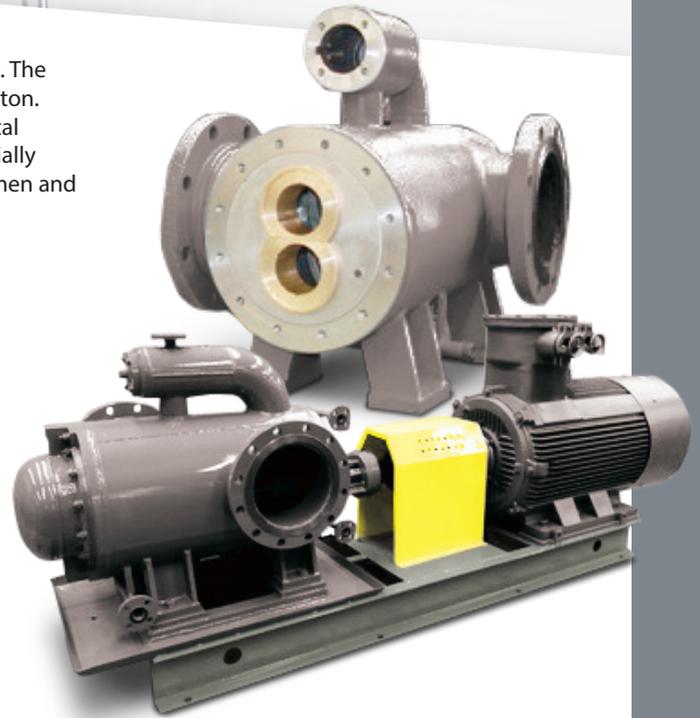

TECHNOLOGY: SCREW

## 2LA Horizontal Twin Screw Pumps, NTG

### Applications

- Self-priming, single-suction twin screw pump especially suitable to deliver various lubricating fluids with high viscosity at medium or high temperature

### Features and Benefits:

- Two series pump, typical non-timing gear transmission
- Strong self-priming capability
- Low pulsation
- Low noise level
- No agitation of the fluids and no emulsified shear
- Suitable for high temperature applications

### Technical Data:

- Pump Casing: Carbon steel/ stainless steel
- Shaft: Alloy steel/ stainless steel
- Bearing Housing: Grey cast iron/ carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN80-DN300
- Two casing constructions to select:
  1. Side inlet, side outlet
  2. Side Inlet, up outlet

TECHNOLOGY: SCREW

## 2KA Vertical Twin Screw Pumps, NTG

### Applications

- Self-priming, single-suction twin screw pump especially suitable to deliver various lubricating fluids with high viscosity at medium or high temperature
- Primarily used in applications where installation space is limited

### Features and Benefits:

- Two series pump, typical non-timing gear transmission
- Strong self-priming capability
- Low pulsation
- Low noise Level
- No agitation of the fluids and no emulsified shear
- Suitable for high temperature applications



TECHNOLOGY: SCREW

## 2LE Horizontal Twin Screw Pumps, NTG

### Applications

- Self-priming, single-suction twin screw pump especially suitable to deliver various lubricating fluids with high viscosity at medium temperature

### Technical Data:

- Two series pump, typical non-timing gear transmission
- Strong self-priming capability
- Low pulsation
- Low noise level
- No agitation of the fluids and no emulsified shear

TECHNOLOGY: SCREW

## 2KE Vertical Twin Screw Pumps, NTG

### Applications

- Self-priming, single-suction twin screw pump especially suitable to deliver various lubricating fluids with high viscosity at medium temperature
- Primarily used in applications where installation space is limited

### Technical Data:

- Two series pump, typical non-timing gear transmission
- Strong self-priming capability
- Low pulsation
- Low noise Level
- No agitation of the fluids and no emulsified shear

## Twin Screw Pumps

| Series  | Capacity          |         | Diff. Pressure |     | Viscosity<br>mm <sup>2</sup> /s (cSt) | Max. Temperature |     |
|---------|-------------------|---------|----------------|-----|---------------------------------------|------------------|-----|
|         | m <sup>3</sup> /h | gpm     | bar            | psi |                                       | °C               | °F  |
| 2LE/2KE | 1-480             | 5-2,200 | 16             | 230 | ≤3,000                                | 80               | 176 |
| 2LA/2KA | 1-480             | 5-2,000 | 16             | 230 | ≤200,000                              | 350              | 662 |

TECHNOLOGY: SCREW

## Multi-phase Twin Screw Pumps

Designed for medium- to low-pressure applications, the Multi-phase Twin Screw Pumps are robust, reliable and built to last within the Water and Oil & Gas industries. Blackmer multi-phase pumps are commonly used in the oilfields that have untreated streams. The 2MP Series is designed for higher differential pressure and higher suction pressure applications.

### Applications

- Crude oil
- Desert oilfield
- Beach-sea oilfield
- Offshore platform
- Wellhead

### Features and Benefits:

- Reduces backpressure
- Increased production
- Quick installation
- Reduces downtime
- Unique materials for extreme operating conditions

### Certifications & Associations:



TECHNOLOGY: SCREW

## 2MPS Multi-phase Twin Screw Pumps, WTG

Multi-phase pumps are boost and delivery equipment, commonly used in oilfields that have untreated streams. In order to satisfy multi-phase delivery of oil, gas and water, containing small particulates, Blackmer multi-phase pumps adopt a unique screw profile and design along with a special pump casing chamber to achieve boosting for gas in mixture and heat distribution.

In order to meet a variety of adverse operating conditions in the field, Blackmer multi-phase pumps use specially selected materials, hardening treatment and specialty seals. To allow our customers simple, convenient and quick installation Blackmer can provide a multi-phase skid system that includes filter, valve, connecting pipeline and control equipment.

### Applications

- Crude oil
- Desert oilfield
- Beach-sea oilfield
- Offshore platform
- Wellhead

### Technical Data:

- Pump Casing: Carbon steel/stainless steel
- Shaft: Alloy steel/stainless steel
- Screws: Alloy steel/stainless steel
- Bearing Housing: Grey cast iron/carbon steel
- Pump Nozzle Flange: GB/DIN/ANSI
- Flange: DN150-DN500



## Multi-phase Pumps

| Series   | Capacity          |           | Diff. Pressure |           | Max. Product Temperature |     | GVF       |
|----------|-------------------|-----------|----------------|-----------|--------------------------|-----|-----------|
|          | m <sup>3</sup> /h | gpm       | bar            | psi       | °C                       | °F  | %         |
| 2MPS...B | 30-1,500          | 130-6,500 | up to 30.0     | up to 430 | 120                      | 248 | up to 80% |
| 2MPS...H | 30-1,000          | 130-4,400 | up to 36.0     | up to 520 | 120                      | 248 | up to 97% |
| 2MP      | 30-800            | 130-3,500 | up to 60.0     | up to 870 | 120                      | 248 | up to 97% |

*Blackmer*<sup>®</sup>

# S-SERIES

TWIN SCREW PUMPS



📍 Silverwater NSW 2128

☎ 1-300-255-786

✉ [sales@allpumps.com.au](mailto:sales@allpumps.com.au)

🌐 [www.allpumps.com.au](http://www.allpumps.com.au)

**WE'RE ALL ABOUT EXPERIENCE**