

NBG, NBGE, NKG, NKGE

Single-stage end-suction pumps according to ISO 2858
50 Hz



1. Applications	4
Introduction	4
Water supply	4
Industrial pressure boosting	4
Industrial liquid transfer	4
HVAC	5
Irrigation	5
2. Features and benefits	6
Pumps with standard motors	7
Pumps with electronic speed control	7
Why select an E-pump	7
Energy-optimised pumps	7
ATEX-approved pumps	7
3. Performance range	8
NBG, 2-pole	8
NKG, 2-pole	9
NBG, 4-pole	10
NKG, 4-pole	11
NBG, 6-pole	12
NKG, 6-pole	13
NBG, 8-pole	14
NKG, 8-pole	14
4. Product range.....	15
NBG, NKG, 2-pole	16
NBG, NKG, 4-pole	21
NBG, NKG, 6-pole	27
NBG, NKG, 8-pole	30
E-pumps	30
5. Identification.....	31
Nameplate, NBG, NKG	31
Type key, NBG, NBGE	32
Type key, NKG, NKGE	35
6. Construction.....	41
NBG, centre-line outlet	41
NBG, tangential outlet	42
NBG, material specification	42
NKG, centre-line outlet	44
NKG, tangential outlet	45
NKG, bearing bracket, oil-lubricated	46
NKG, bearing bracket, grease-lubricated	47
NKG, double seal, tandem	48
NKG, double seal, back to back	49
NKG, cartridge solution	50
NKG, single seal, split cover	51
NKG, stuffing box	52
NKG, material specification	53
Mechanical construction	56
Test pressure	59
Motors and drives	59
7. Operating conditions	64
Pump location	64
Ambient temperature and installation altitude	64
Flow rates	66
Sound pressure level	67
Liquid temperatures	67
Operating range of mechanical shaft seals	68
Recommended shaft seal for water-glycol mixture	69
Operating range of stuffing boxes	70
Pressures in the pump	70
8. Mechanical installation	72
Foundation and grouting	72
Pipes	73
Condensation cover	74
Elimination of noise and vibrations	74
Alignment	75
9. Speed-controlled pumps	76
Why select an E-pump	77
Maximum speed of the impeller	77
Affinity equations	78
Communication with the E-solution	79
Communication with E-pumps	81
10. Pumps connected in parallel.....	82
Control of pumps connected in parallel	82
Pumps connected to Control MPC	82
11. Selection of product	83
Key application data sheet	83
Pump size	84
Efficiency	84
Material	84
Motor size	84
12. Pumped liquids	85
General recommendations	85
"Liquids" in Grundfos.com	85
13. NKG bare shaft pumps	86
NKG, centre-line outlet	86
NKG, tangential outlet	88
14. Pump flange dimensions.....	89
Fixed pump flanges, EN 1092-2	89
Fixed pump flanges, AS2129 table E	89
Fixed pump flanges, EN 1092-1	90
Loose pump flanges, EN 1092-1	90
Loose pump flanges, ASME B16.5	91
Loose pump flanges, JIS B 2220	91
15. Introduction to curves and technical data	92
How to read the curve charts	92

Curve conditions	93	22. Accessories	251
Pump performance testing	93	Counter-flange	251
Performance-test types for end-suction pumps	94	Sensors	256
Specifying acceptance grades	97	External Grundfos sensors	257
16. Performance curves	99	Potentiometer	259
Overview	99	Grundfos GO	259
2-pole	101	CIU communication interface units	260
4-pole	121	CIM communication interface modules	260
6-pole	146	Antennas and battery	261
8-pole	158	EMC filter	261
17. Dimensional drawings and dimensions	159	Shims	261
NBG, dimensional drawings	159	Support blocks	262
NBG dimensions	161	Certificates and reports	274
NKG, dimensional drawings	171		
NKG dimensions	173		
NBGE (Siemens motor with integrated CUE), dimensional drawings	184		
NBGE (Siemens IE4 motor with integrated CUE) dimensions, in mm	187		
NKGE (Siemens motor with integrated CUE), dimensional drawings	190		
NKGE (Siemens IE4 motor with integrated CUE) dimensions, in mm	191		
18. Minimum efficiency index	193		
19. Base frames	195		
NKG base frames	195		
NKG with EN/ISO base frames, dimensional sketches	196		
NKG with C-channel base frames, dimensional sketches	197		
NKG pump dimensions with C-channel base frames	200		
NBG base frames	211		
NBG base frames, dimensional sketches	211		
NB pump dimensions as per motor type	212		
NBG base frames, product numbers	224		
20. Motor data	226		
Standard motor ranges	226		
E-solution range	226		
Electrical data, IE3 motors	227		
Electrical data, MGE motors	231		
Pump dimensions with other motors	232		
21. Vortex impeller range	234		
Super Vortex impellers in NBG, NKG pumps	234		
Applications	234		
NBG/NKG Super vortex, Performance range	235		
Product range	236		
Identification	239		
Construction	240		
NBG/NKG Super vortex, Performance curve	242		

1. Applications

Introduction

NBG and NKG are multipurpose pumps suitable for a variety of different applications demanding reliable and cost-efficient supply.

NBG and NKG pumps are used in five main fields of application:

- water supply
- industrial pressure boosting
- industrial liquid transfer
- HVAC
- irrigation.

Water supply

Besides general water supply in municipal and industrial waterworks, the NBG and NKG pumps are used for these specific applications:

- filtration and transfer at waterworks
- pressure boosting in mains
- pressure boosting in high-rise buildings, hotels, etc.
- pressure boosting in industrial buildings
- various swimming bath applications.

Industrial pressure boosting

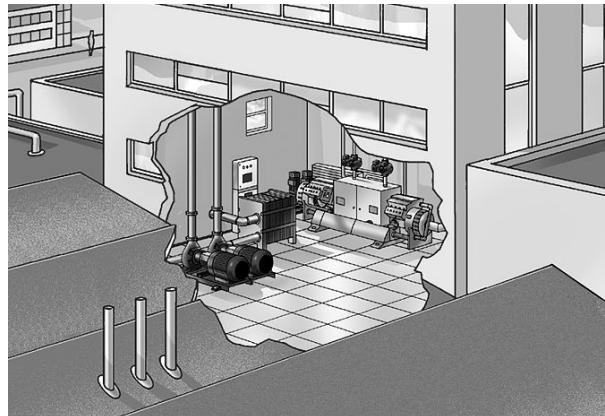
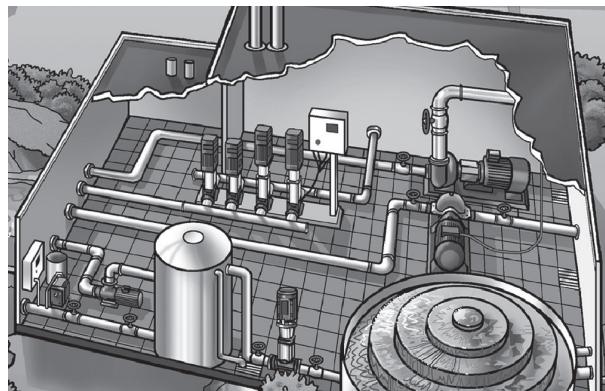
Pressure boosting in these applications:

- industrial washing and cleaning systems
- industrial wash-down systems
- vehicle washing tunnels
- firefighting systems.

Industrial liquid transfer

Liquid transfer in these applications:

- cooling and air-conditioning systems, refrigerants
- boiler-feed and condensate systems
- aquafarming
- industrial heating systems
- district heating plants.



HVAC

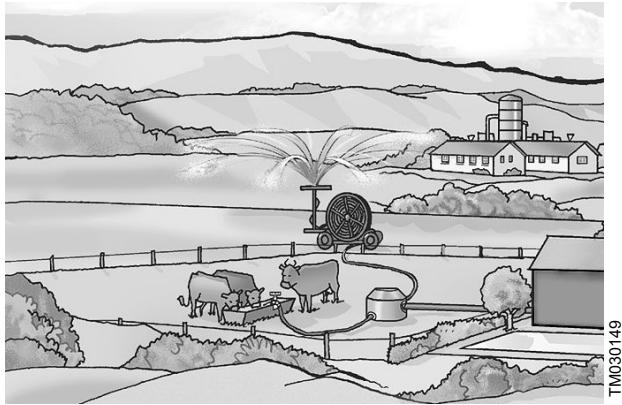
Liquid transfer in these applications:

- heating systems
- ventilation systems
- air-conditioning systems.

Irrigation

Irrigation covers these applications:

- field irrigation, flooding
- sprinkler irrigation
- drip-feed irrigation.



2. Features and benefits

NBG and NKG pumps offer the following features and benefits:

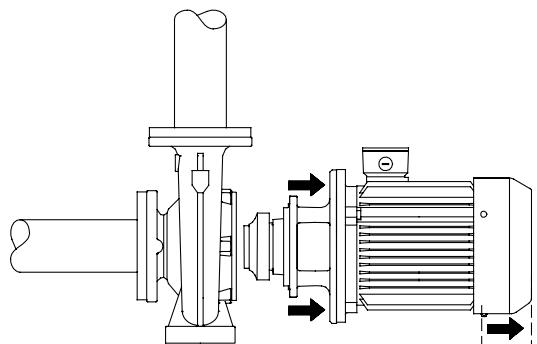
- The pumps are non-self-priming, single-stage, centrifugal volute pumps with axial inlet port, radial outlet port and horizontal shaft.
- All pumps are according to ISO 5199.
- Inlet and outlet flanges are according to EN 1092-2.
- Dimensions and rated performance are according to ISO 2858 (16 bar). However, the stainless steel product range is designed for PN 25.
- The mechanical shaft seal has dimensions according to EN 12756.
- The pumps offer flow rates from 2 to 2200³/h and heads from 2 to 250 m.
- The pumps can be delivered as -E versions where they are combined with an MGE motor (with integrated frequency converter) or they are combined with a "back mounted" CUE frequency converter in combination with a standard motor. Both versions of the -E products are delivered as complete units with no wiring needed to a control room.
- All pumps are statically balanced according to ISO 1940-1 class 6.3. Impellers are hydraulically balanced.



NBG pump

GRA2519

- For NBG pumps the back pull-out design enables removal of the motor, motor stool and impeller without disturbing the pump housing or pipes. Even the largest pumps can thus be serviced by a single person with a crane.



NBG back pull-out design

TM029512

- The NBG pump is close-coupled with a totally enclosed fan-cooled standard motor with main dimensions to IEC and DIN standards.

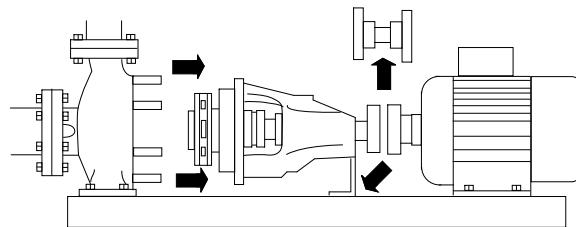
- For most of the NBG pumps, a Grundfos-designed base frame is available. For more information, see section NBG base frames.



GRA2514

NK pump

- For NKG pumps the back pull-out design enables removal of the motor, motor stool and impeller without disturbing the pump housing or pipes. Even the largest pumps can thus be serviced by a single person with a crane.



TM031004

NKG back pull-out design

- The NKG pump is long-coupled with a totally enclosed fan-cooled standard motor with main dimensions to IEC and DIN standards and mounting designation B3 (IM 1001).

Related information

[NKG base frames](#)

Pumps with standard motors

IE3 IE4 IE5

NBG and NKG pumps are fitted with standard motors with efficiency classes IE3/IE4/IE5 for low-voltage three-phase motors.

Pumps with electronic speed control

IE5

NBGE and NKGE pumps are NBG and NKG pumps equipped with a motor with built-in frequency converter and the necessary application software to achieve an all-in-one solution enabling electronic speed control.

Electronic speed control enables continuously variable control of motor speed which again enables adaptation of the performance to a given requirement.

If a sensor is installed, NBGE and NKGE pumps allow for any of these configurations and control methods:

- constant pressure
- proportional control
- temperature control
- constant flow.

NBGE, NKGE pumps with 2-pole motors up to 22 kW and 4-pole motors up to 22 kW are fitted with Grundfos permanent-magnet MGE motors.

Why select an E-pump

A pump with electronic speed control offers these benefits:

- energy savings
- increased comfort
- control and monitoring of pump performance
- communication with the pump.

For further information on electronic speed control, see section Speed-controlled pumps.

Related information

[9. Speed-controlled pumps](#)

Energy-optimised pumps

NBG, NKG pumps are energy-optimised and comply with the EuP Directive, Commission Regulation (EC) No 547/2012, in which most pumps are classified or graduated in an energy efficiency index (MEI). See also section Minimum efficiency index.

Related information

[18. Minimum efficiency index](#)

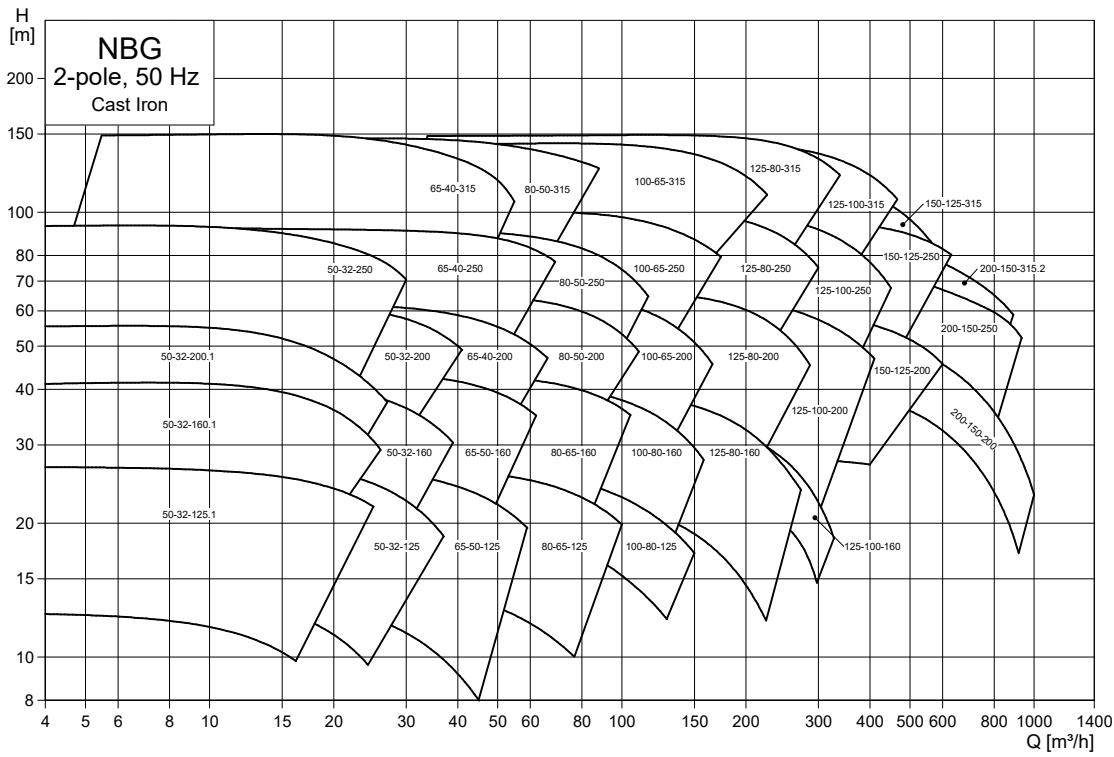
ATEX-approved pumps



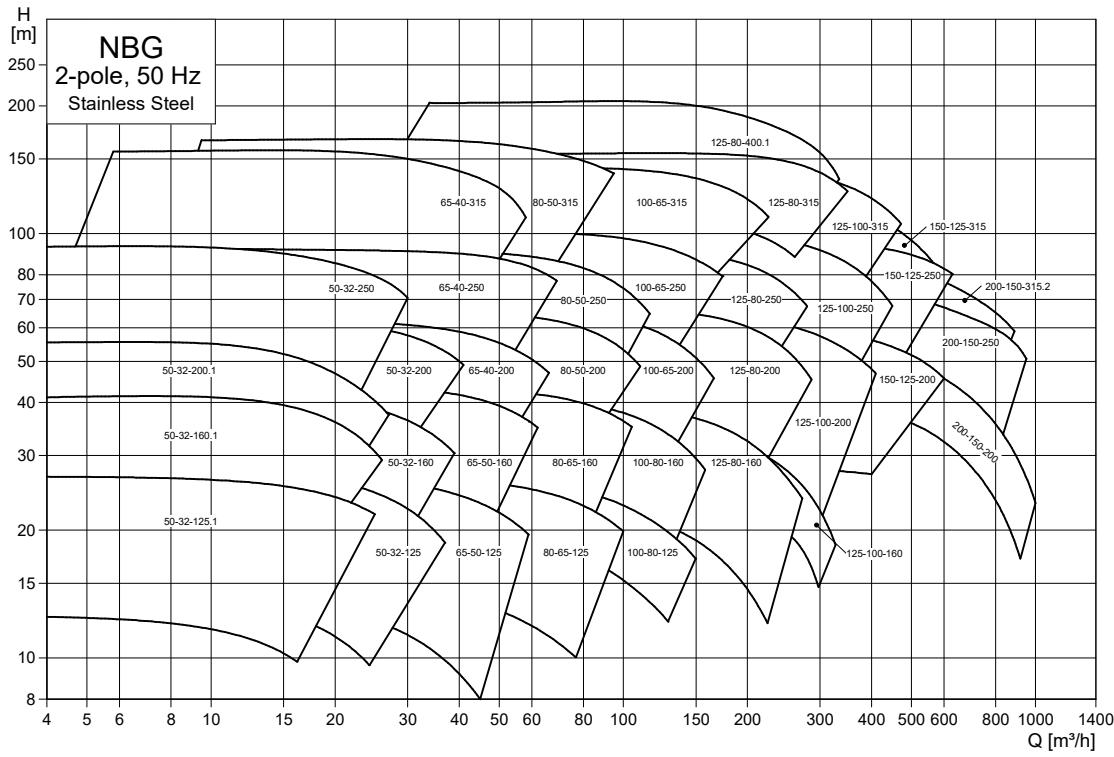
On request, Grundfos offers NBG and NKG pumps with ATEX-approval in accordance with Directive 94/9/EC, group II, category 2G/D and 3G/D. For more information on ATEX-approved pumps, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

3. Performance range

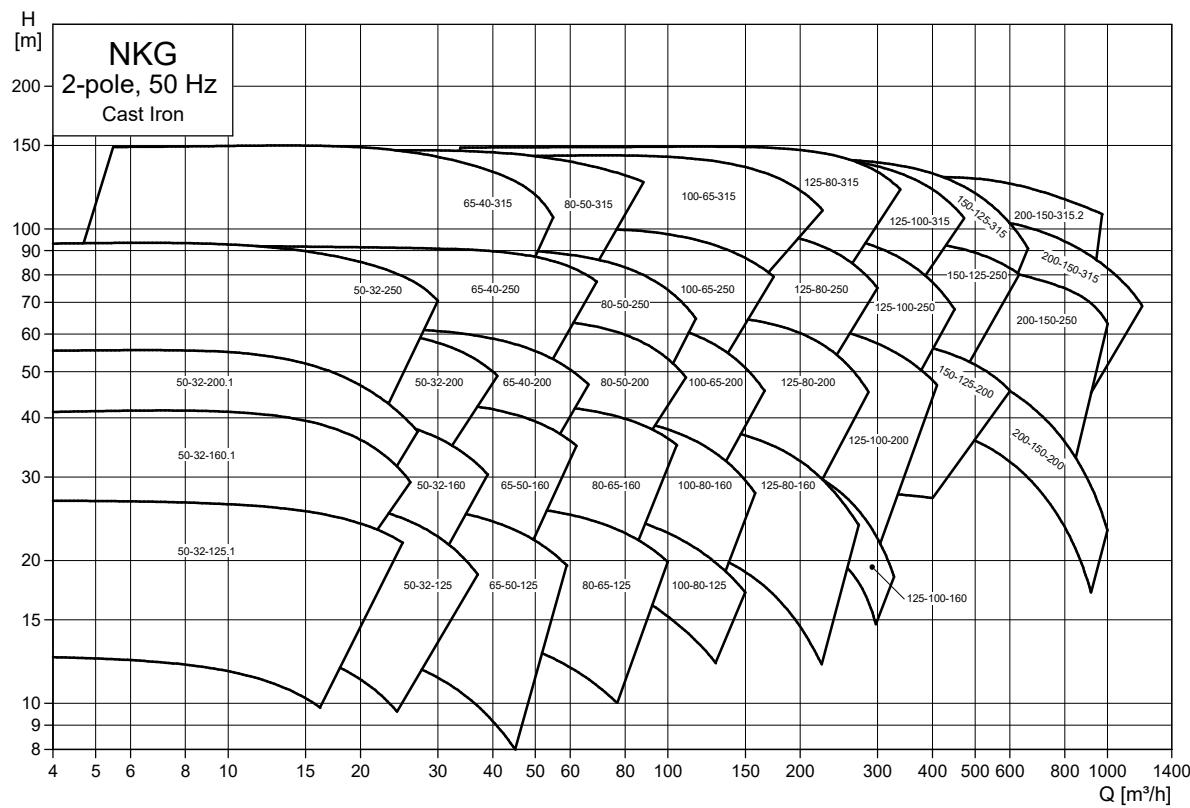
NBG, 2-pole



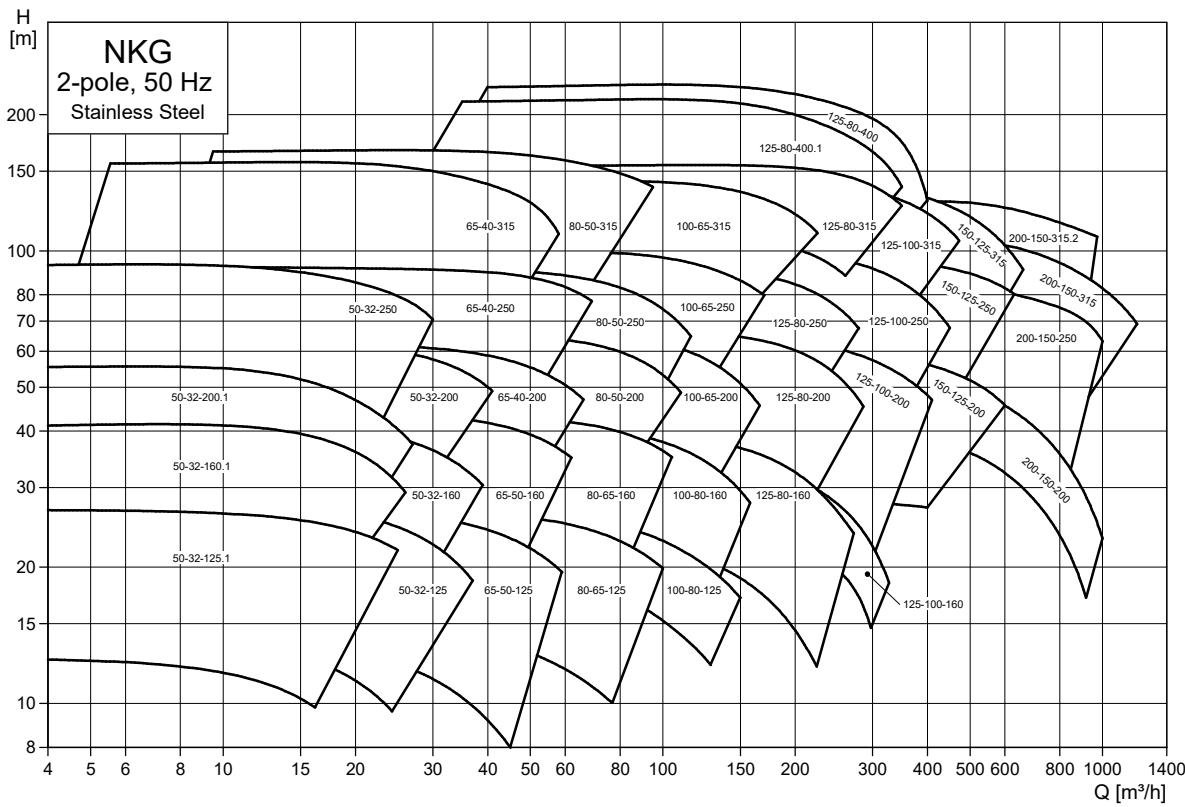
TM051075



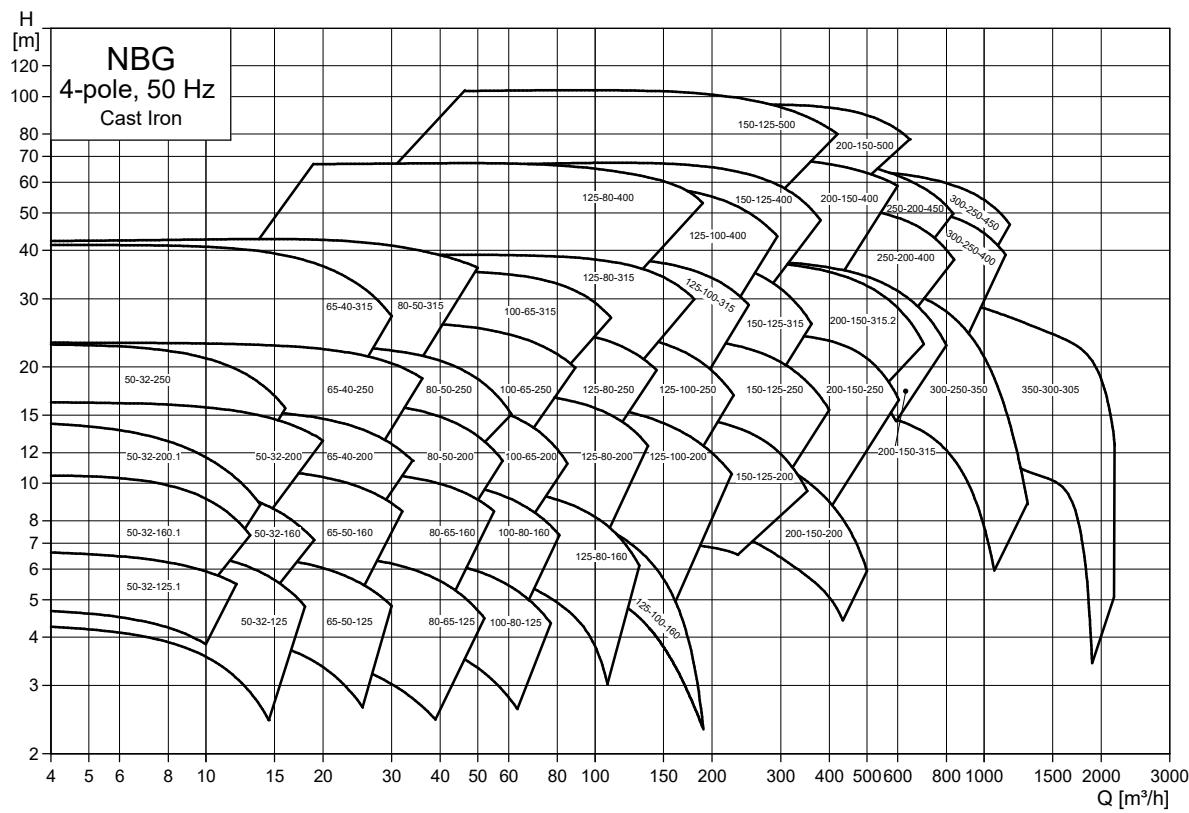
TM051075

NKG, 2-pole

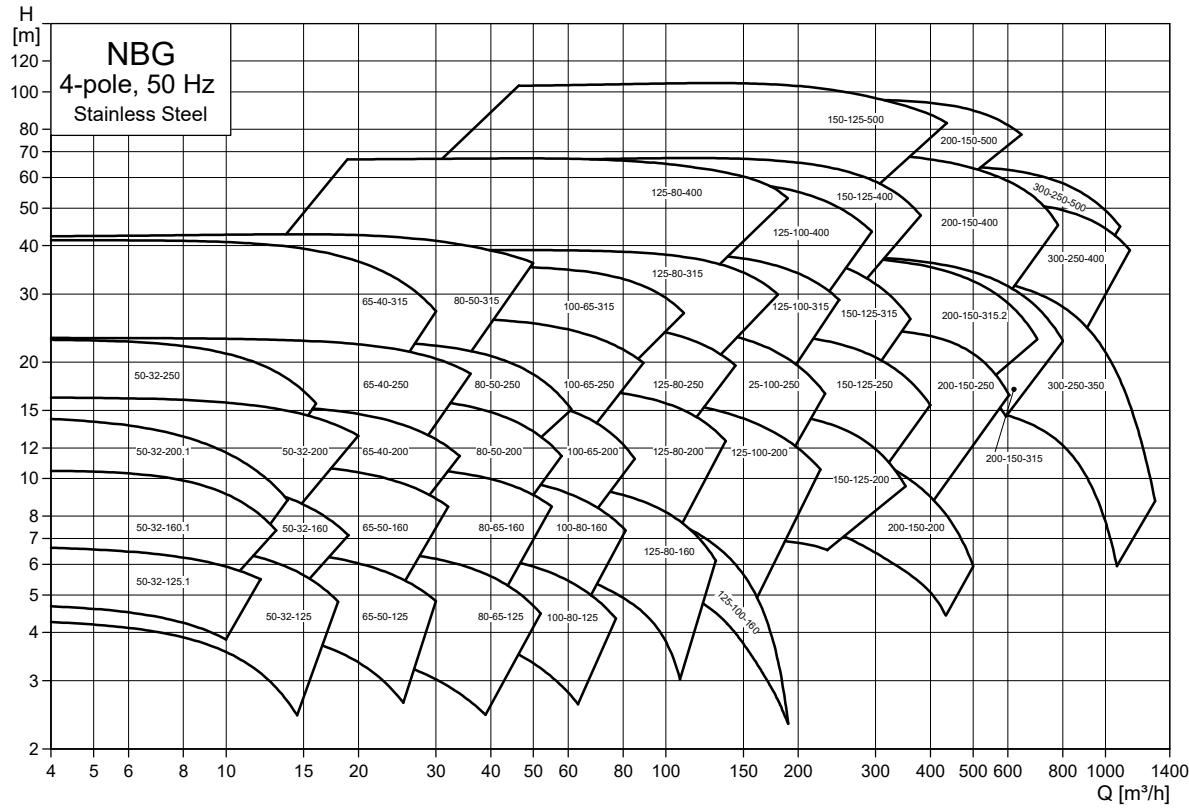
TM051072



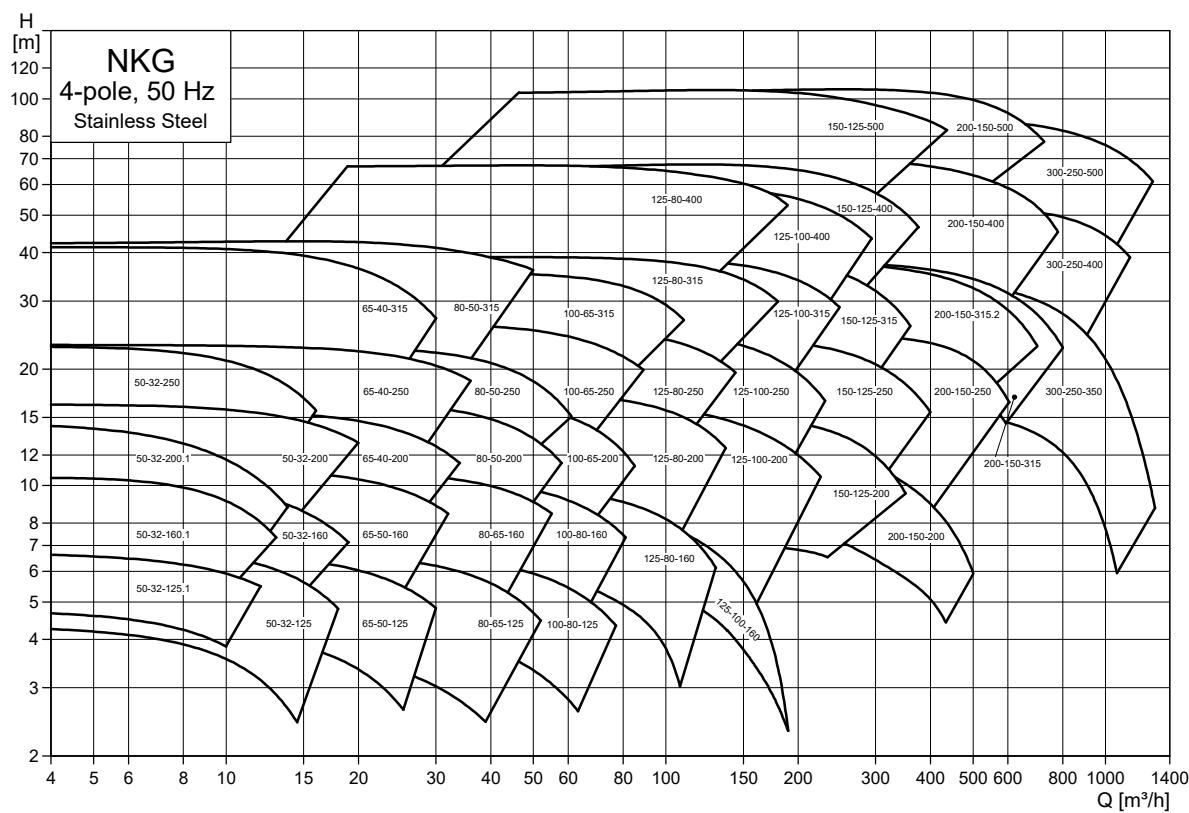
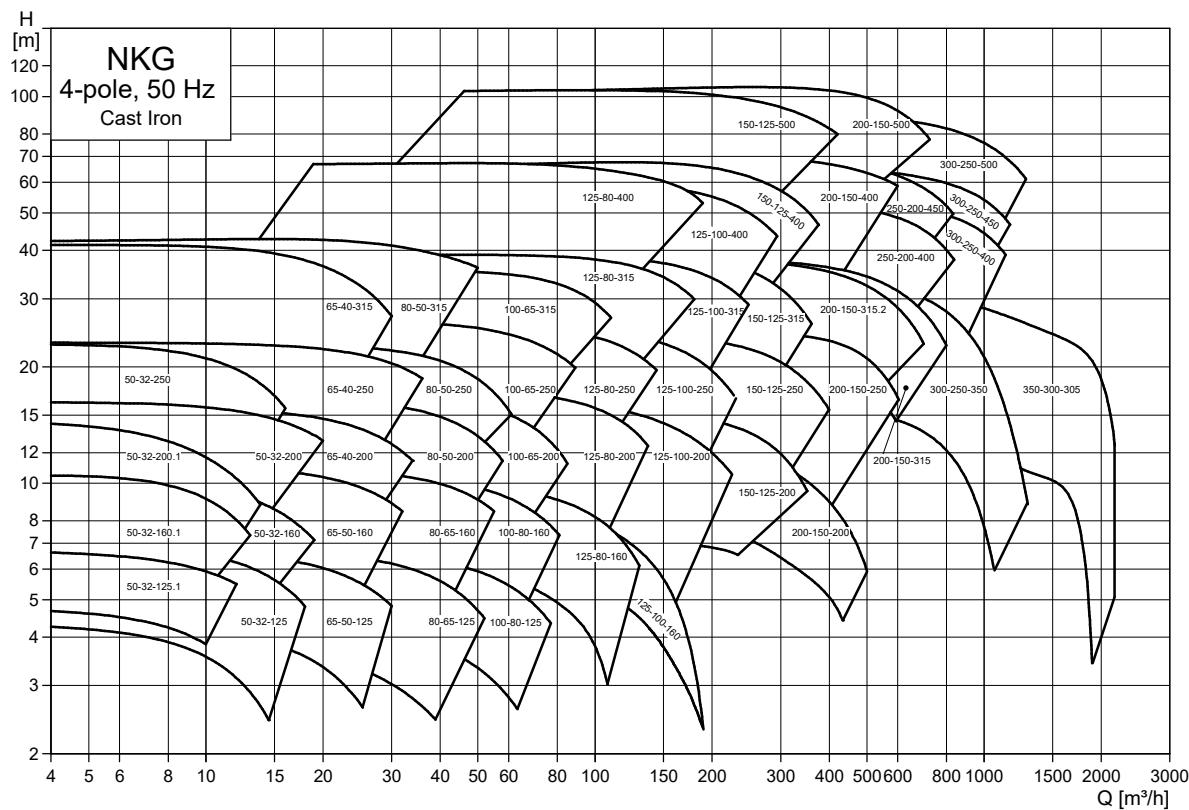
TM051074

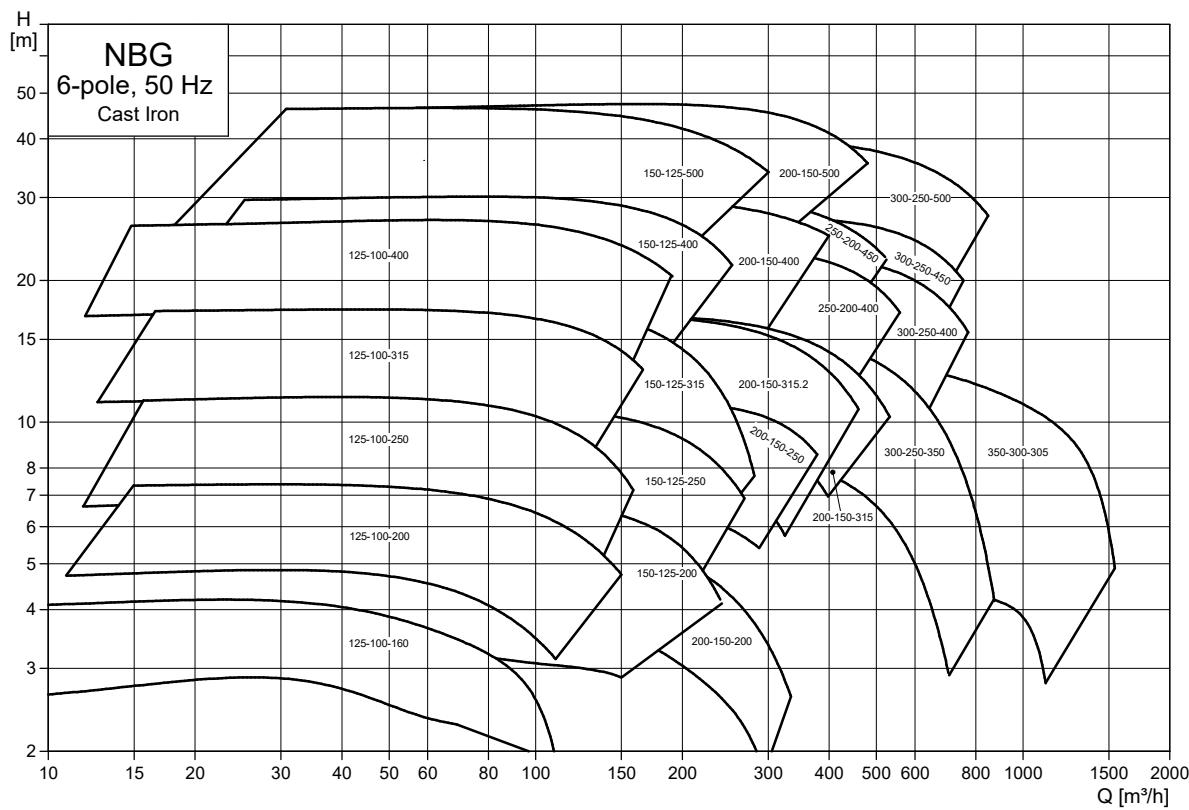
NBG, 4-pole

TM051077

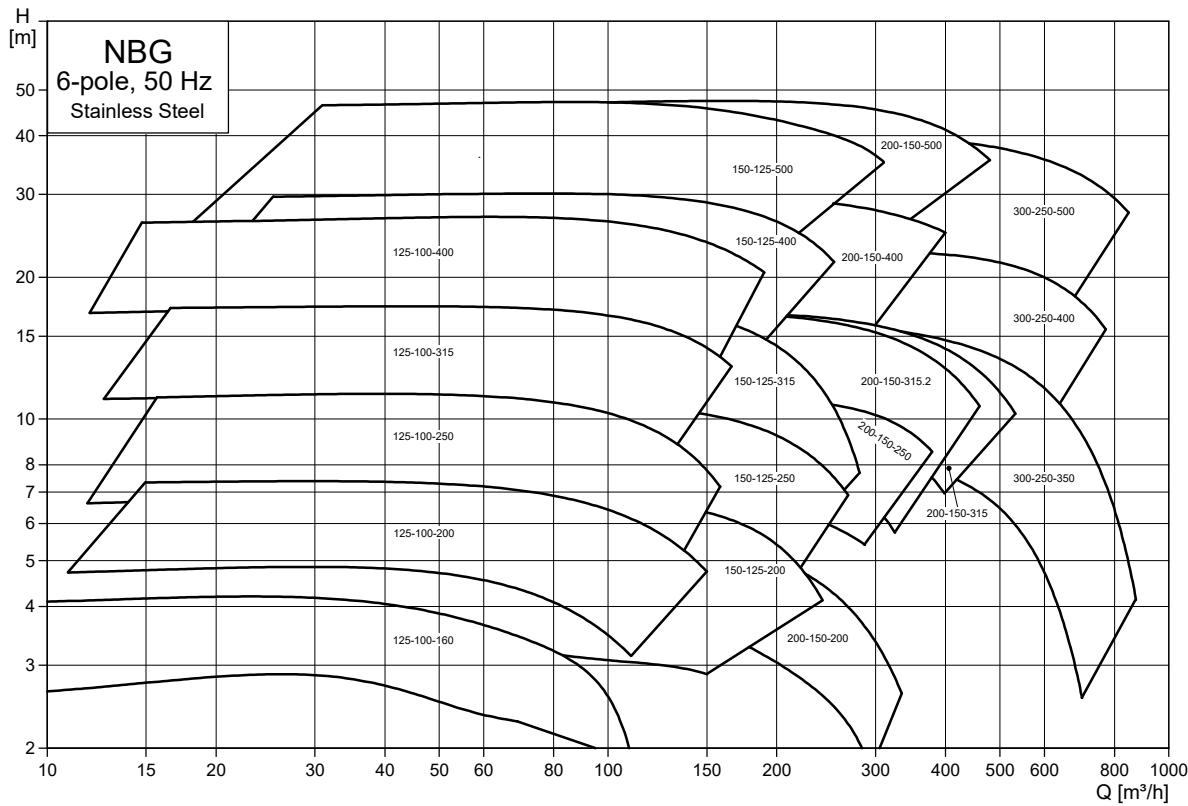


TM051079

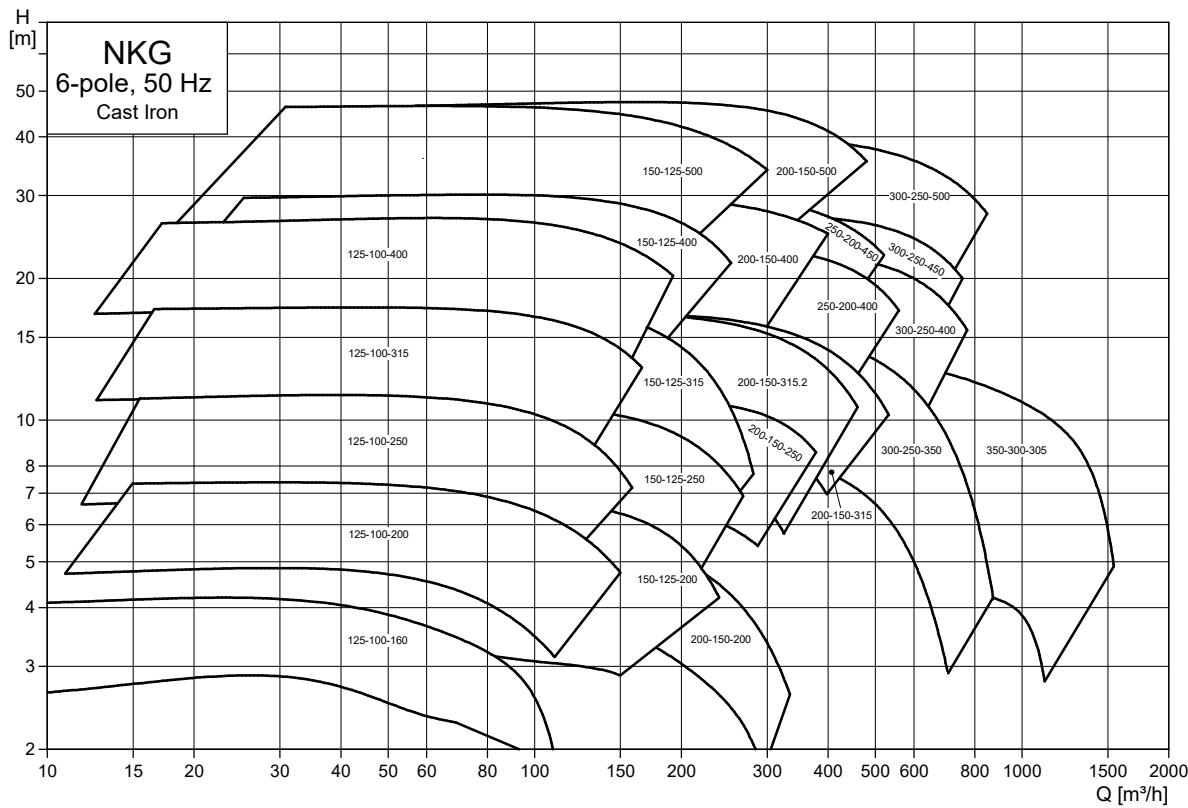
NKG, 4-pole

NBG, 6-pole

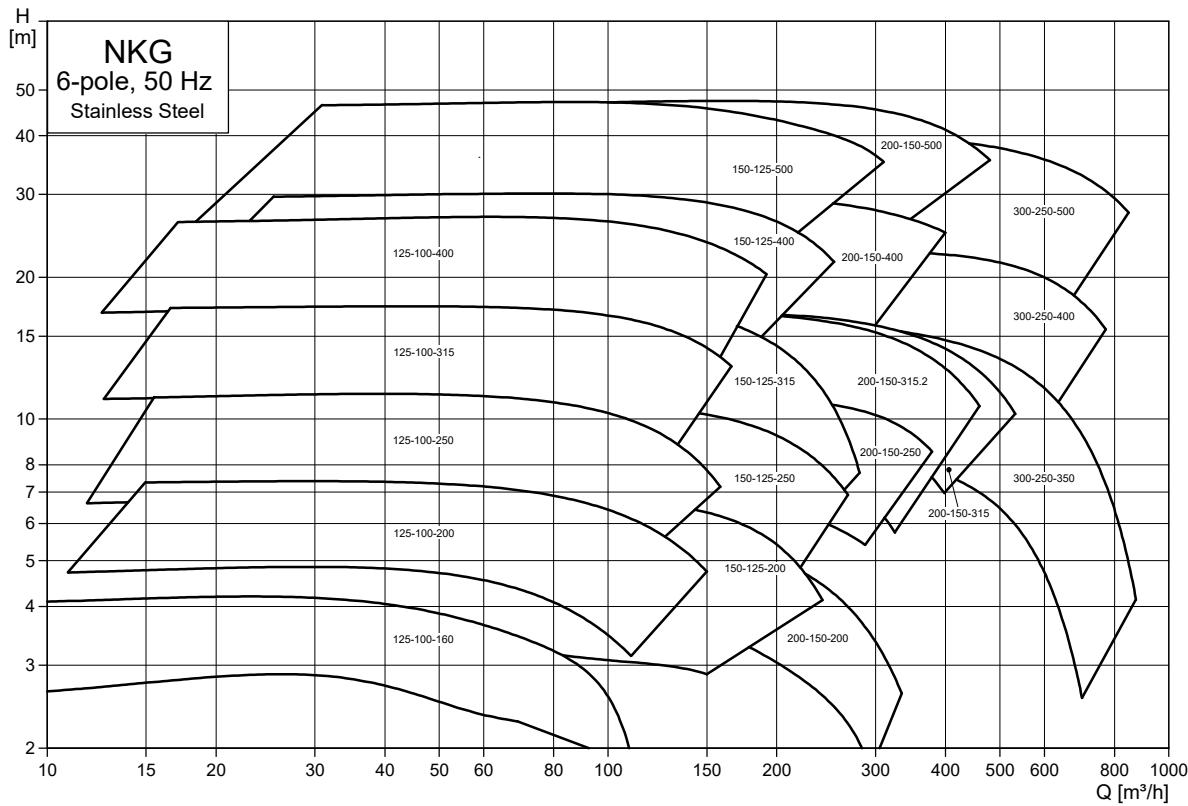
TM051081



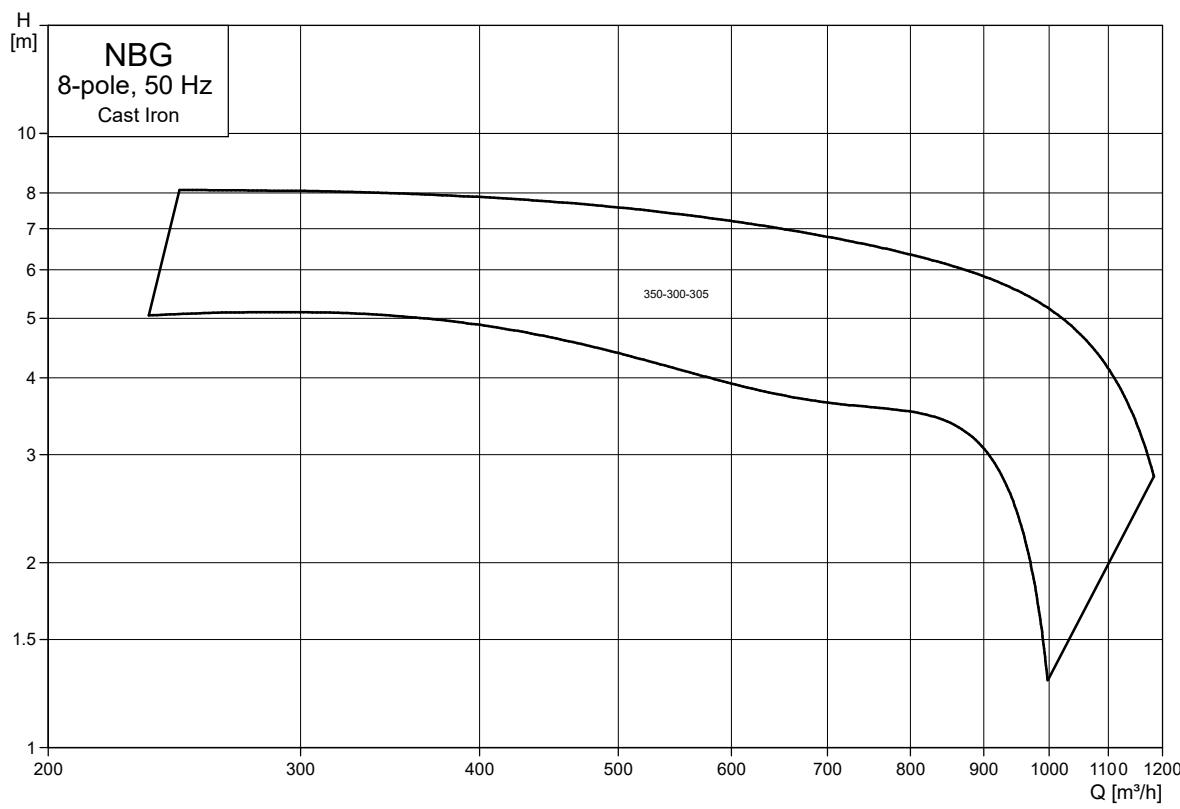
TM051083

NKG, 6-pole

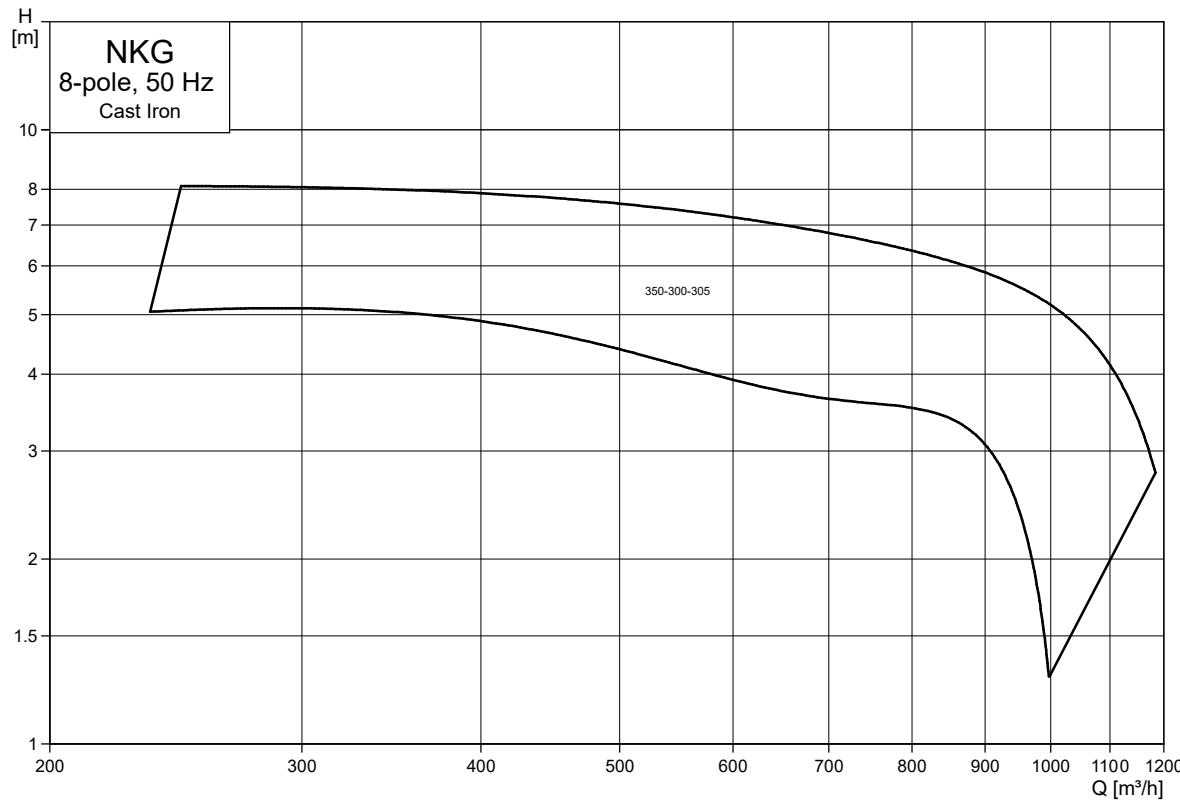
TM051082



TM051082

NBG, 8-pole

TM071347

NKG, 8-pole

TM071348

4. Product range

The tables on the following pages show the complete product ranges of NBG, NBGE and NKG, NKGE pumps. The standard range has been combined on the basis of the following parameters:

Pump

- Pump housings have outlet flanges from DN 32 to DN 300.
- Some stainless steel pump sizes have loose flanges. All others have fixed flanges.
- NBG pumps are available in mounting design A, B, C and F. The base frame for C is available as accessory. F has base frame. For further information, see section Mechanical construction.
- Support blocks: NB, NBG pumps combine with many motor frame sizes. In some cases, support blocks or support rails are needed in order to level out the height difference between pump and motor. Also the size of the motor flange may necessitate the use of supports. See section Support blocks. The Grundfos Product Configuration System makes it possible to configure the NB, NBG pump and the supports, if needed.

Motor

- NBG and NKG pumps are available with 2, 4, 6 and 8 pole motors in IE3 and IE4 efficiency version.
- NBGE and NKGE pump are available with
 - Medium speed (4000 RPM) motors in IE5 version up to 22 kW
 - Low speed (2200/2000 RPM) motors in IE5 version up to 22 kW
- Motors with power rating up to and including 4 kW are available for "low voltage"; motors as from 2.2 kW are available for "high voltage".
- Some pumps can be delivered as -E products in combination with back mounted CUE + IE4/IE5 motor.
- All pumps with non-E-motor can be connected to an external frequency converter (CUE or other brand).

Custom-built pumps

See the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858", or contact Grundfos.

Related information

[Mounting design](#)

[Base frames](#)

NBG, NKG, 2-pole

50 Hz, 2-pole				NBG pumps				NKG pumps				Cast iron pump		Stainless steel pump		d5 [mm] Shaft seal diameter [mm]	
Pump type	P2 [kW]	NBGE/ NKGE		Material code	Options	Material code	Options	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard		
		No sensor	With integrated sensor														
Oversize shaft				Mounting design ¹⁾		Double seal arrangement		Cartridge seal, single or double		Standard bearing bracket		Heavy duty bearing bracket		Stuffing box			
50-32-125.1	0.75	-	-	A	• A, B, C, D, S, T - E, F, G, H	K, M	I, J, L, R, U, W	-	-	• A, B, C, D, S, T - E, F, G, H	-	-	F	F	PN 10	24	28
	1.1	•	-	A	• - • • •	•	• N, P	-	-	• - • • •	•	•	F	F	PN 16	24	28
	1.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	24	28
	2.2	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	24	28
50-32-125	1.1	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	24	28
	1.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	24	28
	2.2	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	24	28
	3	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	24	28
50-32-160.1	1.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	24	28
	2.2	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	24	28
	3	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	24	28
	4	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	24	28
50-32-160	2.2	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	24	28
	3	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	24	28
	4	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	24	28
	5.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	24	28
50-32-200.1	3	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	24	28
	4	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	24	28
	5.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	24	28
	7.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	24	28
50-32-200	4	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	24	28
	5.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	24	28
	7.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	24	28
	11	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	24	28
50-32-250	5.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	32	38
	7.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	32	38
	11	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	32	38
	15	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	32	38
65-40-200	5.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	32	38
	7.5	•	-	A	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	32	38
	11	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	32	38
	15	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	32	38
65-40-250	11	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	32	38
	15	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	32	38
	18.5	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	32	38
	22	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 40	32	38
65-40-315	30	•	-	B	• - • • •	-	-	-	-	• - • • •	•	•	F	F	DIN, code F	32	38
	22	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	ANSI, code G	32	38
	30	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	JIS, code J	32	38
	37	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 16	32	38
65-40-315	45	•	-	C	• - • • •	-	-	-	-	• - • • •	•	•	F	F	PN 25	32	38

50 Hz, 2-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump	
Pump type	NBGE/ NKG		Mounting design ¹⁾	Material code	Options	Material code	Options	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard		
	No sensor	With integrated sensor											
65-50-125	P2 [kW]			A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	DN 5 [mm] Shaft seal diameter [mm]		
	1.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	2.2	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	3	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	4	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
65-50-160	5.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	4	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	5.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	7.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
80-50-200	11	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	11	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	15	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	18.5	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
80-50-250	22	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	15	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	18.5	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	22	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
80-50-315	30	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	37	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	45	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	55	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
80-65-125	75	-	-	C	• - • • •	• - • • •	• - • • •	- - -	- - -	L L L	• • •	32 38	
	3	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	4	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	5.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
80-65-160	7.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	5.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	7.5	•	-	A	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	11	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
100-65-200	15	•	-	B	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	24 28	
	11	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	15	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	18.5	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
100-65-250	22	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	30	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	37	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	
	30	•	-	C	• - • • •	• - • • •	• - • • •	F F	• - -	L L L	• • •	32 38	

50 Hz, 2-pole				NBG pumps				NKG pumps				Cast iron pump		Stainless steel pump		d5 [mm] Shaft seal diameter [mm]				
Pump type	P2 [kW]	NBGE/ NKGE		Mounting design ¹⁾	Material code	Options	Material code	Options	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard						
		No sensor	With integrated sensor																	
100-65-315	55	•	-	-	C	• - -	• K, M	• I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	• A, B, C, D, S, T E, F, G, H	• - -	• K, M	• I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F	F F F	L L L	• • •	42 48
	75	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
	90	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
	110	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
100-80-125	4	•	-	-	A	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	24 28	
	5.5	•	-	-	A	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	24 28	
	7.5	•	-	-	A	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	24 28	
	11	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	24 28	
100-80-160	7.5	•	-	-	A	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	11	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	15	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	18.5	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
125-80-160	11	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	15	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	18.5	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	22	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
125-80-200	30	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	22	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	30	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	37	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
125-80-250	45	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	55	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	75	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	90	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
125-80-315	90	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
	110	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
	132	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
	160	-	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	42 48	
125-80-400.1	200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	LL	• •	42 48
	132	-	-	-	C	- - -	• N, P	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	42 48
	160	-	-	-	C	- - -	• N, P	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	42 48
	200	-	-	-	C	- - -	• N, P	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	42 48
125-80-400	250	-	-	-	C	- - -	- - -	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	48 55
	200	-	-	•	C	- - -	- - -	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	48 55
	250	-	-	•	-	- - -	- - -	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	48 55
	315	-	-	•	-	- - -	- - -	- - -	-	-	-	• N, P	- - -	• N, P	- - -	-	-	LL	• •	48 55
125-100-160	18.5	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	22	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	
	30	•	-	-	C	• - -	• N, P	• I, J, L, R, U, W	-	-	• - -	• N, P	• I, J, L, R, U, W	-	• - -	• - -	• - -	• - -	32 38	

50 Hz, 2-pole				NBG pumps				NKG pumps				Cast iron pump		Stainless steel pump				
Pump type	NBGE/ NKGE		Mounting design ¹⁾	Material code	Options	Material code	Options	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard	Flange rating ²⁾	Flange standard					
	P2 [kW]	No sensor	With integrated sensor									d5 [mm]	Shaft seal diameter [mm]					
125-100-200	30	•	-	-	C	A, B, C, D, S, T E, F, G, H	K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H	K, M N, P I, J, L, R, U, W	Stuffing box	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F F	32 32 32 32 32 42	38 38 38 38 38 48			
	37	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
	45	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
	55	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
	75	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
	55	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
125-100-250	75	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
	90	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
	110	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
	132	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
125-100-315	110	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F F	L L L L	•	•	•	42	48
	132	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	F F F	L L L	•	•	•	42	48
	200	-	-	-	C	• -	- - -	- - -	• -	- - -	•	F F F	-	-	-	-	42	48
	45	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
150-125-200	55	•	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	32	38
	75	-	-	-	C	• -	• - •	- - -	• -	• - •	•	F F F	L L L	•	•	•	32	38
	90	-	-	-	C	• -	- - -	- - -	• -	- - -	•	F F F	L L L	•	•	•	32	38
	110	-	-	-	C	• -	- - -	- - -	• -	- - -	•	F F F	L L L	•	•	•	32	38
	90	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
150-125-250	110	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F F	L L L L	•	•	•	42	48
	132	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	F F F	L L L	•	•	•	42	48
	200	-	-	-	C	• -	- - -	- - -	• -	- - -	•	F F F	-	-	-	-	42	48
	132	-	-	-	C	• -	• • •	- - -	• -	• • •	•	F F F	L L L	•	•	•	42	48
150-125-315	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	F F F	L L L	•	•	•	42	48
	200	-	-	-	C	• -	- - -	- - -	• -	- - -	•	F F F	-	-	-	-	42	48
	250	-	-	-	-	-	-	-	• -	- - -	•	F F F	-	-	-	-	42	48
	75	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	32	38
	90	-	-	-	C	• -	- - -	- - -	• -	- - -	•	- F F F	L L L	•	•	•	32	38
200-150-200	110	-	-	-	C	• -	- - -	- - -	• -	- - -	•	- F F F	L L L	•	•	•	32	38
	132	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	42	48
	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	42	48
	200	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	42	48
	250	-	-	-	-	-	-	-	• -	- - -	•	- F F F	-	-	-	-	42	48
200-150-315	355	-	-	-	-	-	-	-	• -	• - •	•	• F F F	L L L	•	•	•	48	55
	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	48	55
	200	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	48	55
	250	-	-	-	-	-	-	-	• -	- - -	•	- F F F	L L L	•	•	•	48	55
	315	-	-	-	-	-	-	-	• -	• - •	•	- F F F	L L L	•	•	•	48	55
200-150-315.2	355	-	-	-	-	-	-	-	• -	• - •	•	- F F F	L L L	•	•	•	48	55
	160	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	48	55
	200	-	-	-	C	• -	• - •	- - -	• -	• - •	•	- F F F	L L L	•	•	•	48	55
	250	-	-	-	-	-	-	-	• -	- - -	•	- F F F	L L L	•	•	•	48	55
	315	-	-	-	-	-	-	-	• -	• - •	•	- F F F	L L L	•	•	•	48	55

Pump type	50 Hz, 2-pole			NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump		Flange rating ²⁾ standard	Flange rating ²⁾ standard	Shaft seal diameter [mm]	
	NBGE/ NKG		Mounting design ¹⁾	Material code		Options	Material code		Options	Flange rating ²⁾ standard	Flange rating ²⁾ standard	Flange rating ²⁾ standard	Flange rating ²⁾ standard				
	No sensor	With integrated sensor		A, B, C, D, S, T E, F, G, H K, M	N, P I, J, L, R, U, W		A, B, C, D, S, T E, F, G, H K, M	N, P I, J, L, R, U, W		PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J				
200-150-315	250	-	-	-	-	-	-	-	-	-	-	-	-	48	55		
	315	-	-	-	-	-	-	-	-	-	-	-	-	48	55		
	355	-	-	-	-	-	-	-	-	-	-	-	-	48	55		

1) For information about mounting designs, see section Mounting design.

2) F: fixed flange. L: loose flange

Related information

Mounting design

NBG, NKG, 4-pole

50 Hz, 4-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump			
Pump type	NBGE/ NKG		Mounting design ³⁾	Material code	Options	Material code	Options	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard		
	No sensor	With integrated sensor													
	P2 [kW]		Oversize shaft												
80-50-200	1.1	•	-	A	• - • • •	E, F, G, H K, M				F	F	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	24 28 24 28 24 28 24 28	
	1.5	•	-	A	• - • • •	N, P I, J, L, R, U, W	Double seal arrangement	Cartridge seal, single or double Pump housing with feet Pump with base frame	• - • • •	F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	24 28 24 28 24 28 24 28	
	2.2	•	-	A	• - • • •			Stuffing box	Double seal arrangement	F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	24 28 24 28 24 28 24 28	
	3	•	-	A	• - • • •			Cartridge seal, single or double Standard bearing bracket	Cartridge seal, single or double Standard bearing bracket	F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	24 28 24 28 24 28 24 28	
80-50-250	2.2	•	-	A	• - • • •			Heavy duty bearing bracket	Heavy duty bearing bracket	F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
	3	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
	4	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
80-50-315	4	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
	5.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
	7.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
	11	•	-	C	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	32 38 32 38 32 38	
80-65-125	0.37	-	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	0.55	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	0.75	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
80-65-160	1.1	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	24 28 24 28 24 28 24 28	
	0.55	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	0.75	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	1.1	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
100-65-200	1.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	2.2	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	3	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	4	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
100-65-250	3	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	4	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	5.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	7.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
100-65-315	5.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	42 48 42 48 42 48 42 48	
	7.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	42 48 42 48 42 48 42 48	
	11	•	-	C	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	42 48 42 48 42 48 42 48	
	15	•	-	C	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	42 48 42 48 42 48 42 48	
100-80-125	0.55	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	0.75	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
	1.1	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L	24 28 24 28 24 28	
100-80-160	0.75	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	1.1	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	1.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	2.2	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
125-80-160	1.5	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	2.2	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	3	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	
	4	•	-	A	• - • • •					F	F	PN 16 PN 40 DIN, code F ANSI, code G JIS, code J	L L L L L L L L L L L L	32 38 32 38 32 38 32 38	

50 Hz, 4-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump	
Pump type	NBGE/ NKG		Mounting design ³⁾	Material code	Options	Material code	Options	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard		
	No sensor	With integrated sensor											
125-80-200	P2 [kW]		Oversize shaft	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	32 38 32 38 32 38 32 38 32 38 32 38		
	2.2	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	3	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	4	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	5.5	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	7.5	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
125-80-250	5.5	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	7.5	•	-	-	• - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	11	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
125-80-315	11	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	15	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	18.5	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	22	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
125-80-400	18.5	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	22	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	30	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	37	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	45	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
125-100-160	2.2	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	3	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	4	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
125-100-200	4	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	5.5	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	7.5	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
125-100-250	11	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	15	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	15	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
125-100-315	18.5	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	22	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	30	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
125-100-400	22	-	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	30	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	37	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	45	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	55	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	42 48	
	5.5	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
150-125-200	7.5	•	-	-	A • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	11	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	
	15	•	-	-	C • - • • •	• - • • •	• - • • •	F F	• -	L L L	• • •	32 38	

dS [mm]
Shaft seal diameter [mm]

50 Hz, 4-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump		
Pump type	NBGE/ NKG		Mounting design ³⁾	Material code	Options	Material code	Options	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard	
	No sensor	With integrated sensor												
	P2 [kW]	Mounting design ³⁾	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J	42 [mm] 48 [mm]	42 [mm] 48 [mm]	42 [mm] 48 [mm]	42 [mm] 48 [mm]	
150-125-250	11	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	15	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	18.5	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	22	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	30	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	18.5	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
150-125-315	22	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	30	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	37	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	45	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	37	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	45	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
150-125-400	55	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	75	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	42 48	
	90	- -	- -	C	• - • - •	- - -	• - • - •	• • • • •	F F	• - -	L L L	• • •	42 48	
	55	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
	75	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
	90	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
150-125-500	110	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
	132	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
	160	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	F F	• - -	L L L	• • •	60 60	
	7.5	• -	- -	A	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	32 38	
	11	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	32 38	
	15	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	32 38	
200-150-250	15	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
	18.5	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
	22	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
	30	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
	37	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
	45	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	42 48	
200-150-315.2	22	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	30	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	37	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	45	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	55	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	75	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
200-150-315	37	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	45	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	55	• -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	75	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	
	90	- -	- -	C	• - • • •	- - -	• - • • •	• • • • •	- F	• - -	L L L	• • •	48 55	

50 Hz, 4-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump	
Pump type	NBGE/ NKG		Mounting design ³⁾	Material code	Options	Material code	Options	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard		
	No sensor	With integrated sensor											
200-150-400	P2 [kW]												
	55	•	-	C	• - • • •	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	• - • - •	• - • - •	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	L L L L L L L L L L L L L L L L L L	48 55 48 55 48 55 48 55 48 55 48 55
	75	-	-	C	• - • • •	N, P I, J, L, R, U, W							
	90	-	-	C	• - • • •								
	110	-	-	C	• - • • •								
	132	-	-	C	• - • • •								
	160	-	-	C	• - • • •								
200-150-500	132	-	-	C	• - • • •								
	160	-	-	C	• - • • •								
	200	-	-	C	• - • • •								
	250	-	-	-	-								
	37	•	-	C	• • - - -								
250-200-400	45	•	-	C	• • - - -								
	55	•	-	C	• • - - -								
	75	-	-	C	• • - - -								
	90	-	-	C	• • - - -								
	110	-	-	C	• • - - -								
	132	-	-	C	• • - - -								
250-200-450	75	-	-	C	• • - - -								
	90	-	-	C	• • - - -								
	110	-	-	C	• • - - -								
	132	-	-	C	• • - - -								
	160	-	-	C	• • - - -								
300-250-350	37	•	-	C	• • • • •								
	45	•	-	C	• • • • •								
	55	•	-	C	• • • • •								
	75	-	-	C	• • • • •								
	90	-	-	C	• • • • •								
300-250-400	45	•	-	C	• • • • •								
	55	•	-	C	• • • • •								
	75	-	-	C	• • • • •								
	90	-	-	C	• • • • •								
	110	-	-	C	• • • • •								
300-250-450	132	-	-	C	• • • • •								
	160	-	-	C	• • • • •								
	175	-	-	C	• • • - -								
	200	-	-	C	• • • - -								
	225	-	-	C	• • • - -								
300-250-500	160	-	-	C	• • • - -								
	180	-	-	C	• • • - -								
	200	-	-	C	• • • - -								
	225	-	-	C	• • • - -								
	250	-	-	C	• • • - -								

Ø5 [mm]

Shaft seal diameter [mm]

Pump type	50 Hz, 4-pole		NBG pumps			NKG pumps			Cast iron pump	Stainless steel pump				
	P2 [kW]	NBGE/ NKG	No sensor	With integrated sensor	Oversize shaft	Material code	Options	Material code	Options	Flange rating ⁴⁾	Flange standard	Flange rating ⁴⁾	Flange standard	
350-300-305	75	-	-	-	C	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	48 48 48 48 48	55 55 55 55 55
	90	-	-	-	C	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	48 48 48 48 48	55 55 55 55 55
	110	-	-	-	C	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	48 48 48 48 48	55 55 55 55 55
	132	-	-	-	C	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	48 48 48 48 48	55 55 55 55 55
	160	-	-	-	C	A, B, C, D, S, T E, F, G, H K, M	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F F F	PN 16 PN 25 PN 40 DIN, code F ANSI, code G IS, code J	48 48 48 48 48	55 55 55 55 55
													Ø5 [mm] Shaft seal diameter [mm]	

3) For information about mounting designs, see section Mounting design.

4) F: fixed flange. L: loose flange.

5) Heavy duty bearing design is required due to the pump design.

Go to section "Selection of pump bearing design" in the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN733 and ISO 2858" to evaluate the service life of the bearing system.

Related information

Mounting design

NBG, NKG, 6-pole

50 Hz, 6-pole			NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump	
Pump type	NBGE/ NKG		Mounting design ⁶⁾	Material code	Options	Material code	Options	Flange rating ⁷⁾	Flange standard	Flange rating ⁷⁾	Flange standard	
	No sensor	With integrated sensor										
125-100-160	0.55	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	0.75	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	1.1	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
125-100-200	1.1	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	1.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	2.2	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	3	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
125-100-250	2.2	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	3	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	4	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	5.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
125-100-315	4	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	5.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	7.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	11	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
125-100-400	7.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	11	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	15	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
150-125-200	1.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	2.2	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	3	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
	4	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	32	38
150-125-250	3	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	4	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	5.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	7.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
150-125-315	5.5	-	-	A	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	7.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	11	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	15	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
150-125-400	11	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	15	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	18.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	22	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
	30	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	42	48
150-125-500	18.5	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60
	22	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60
	30	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60
	37	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60
	45	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60
	55	-	-	C	● -	● ● ●	● -	● ● ● ●	F	F	60	60

50 Hz, 6-pole				NBG pumps			NKG pumps			Cast iron pump		Stainless steel pump	
Pump type	P2 [kW]	NBGE/ NKG		Material code	Options	Material code	Options	Flange rating ⁷⁾	Flange standard	Flange rating ⁷⁾	Flange standard		
		No sensor	With integrated sensor										
Mounting design ⁶⁾				Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame		Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket		PN 10 PN 16 DIN, code F ANSI, code G JIS, code J		PN 16 PN 25 PN 40 DIN, code F ANSI, code G JIS, code J			
200-150-200	2.2	-	-	A	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	32 38	
	3	-	-	A	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	32 38	
	4	-	-	A	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	32 38	
200-150-250	5.5	-	-	A	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	42 48	
	7.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	42 48	
	11	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	42 48	
200-150-315.2	7.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	11	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	15	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
200-150-315	18.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	11	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	15	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
200-150-400	18.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	22	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	30	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
200-150-500	18.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	60 60	
	22	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	60 60	
	30	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	60 60	
250-200-400	37	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	45	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	55	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
250-200-450	75	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	15	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	18.5	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
250-200-450	22	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	30	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	37	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
300-250-350	18.5	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	22	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	30	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
300-250-400	37	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	45	-	-	C	● - ● -	● - ● -	● - ● -	-	F	● -	-	-	
	11	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
300-250-350	15	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	18.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	22	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
300-250-400	15	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	18.5	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	22	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
300-250-400	30	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	37	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	
	45	-	-	C	● - ● ● ●	● - ● ● ●	● - ● ● ●	-	F	● -	L	48 55	

d5 [mm] Shaft seal diameter [mm]

50 Hz, 6-pole				NBG pumps			NKG pumps		Cast iron pump		Stainless steel pump	
Pump type	P2 [kW]	NBGE/ NKG E		Material code	Options	Material code	Options	Flange rating ⁷⁾	Flange standard	Flange rating ⁷⁾	Flange standard	
		No sensor	With integrated sensor									
300-250-450	18.5	-	-	C	● ● - - -	A, B, C, D, S, T E, F, G, H	K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	● - - - ● ● -	A, B, C, D, S, T E, F, G, H	Stuffing box K, M N, P I, J, L, R, U, W	
	22	-	-	C	● ● - - -				● - - - ● ● -			
	30	-	-	C	● ● - - -				● - - - ● ● -			
	37	-	-	C	● ● - - -				● - - - ● ● -			
	45	-	-	C	● ● - - -				● - - - ● ● -			
	55	-	-	C	● ● - - -				● - - - ● ● -			
	45	-	-	C	● ● ● ● ● -				● - - - ● ● -			
300-250-500	45	-	-	C	● ● ● ● ● -				● - - - ● ● -			
	55	-	-	C	● ● ● ● ● -				● - - - ● ● -			
	75	-	-	C	● ● ● ● ● -				● - - - ● ● -			
	90	-	-	C	● ● ● ● ● -				● - - - ● ● -			
350-300-305	18.5	-	-	C	● ● - - -				● - - - ● ● -			
	22	-	-	C	● ● - - -				● - - - ● ● -			
	30	-	-	C	● ● - - -				● - - - ● ● -			
	37	-	-	C	● ● - - -				● - - - ● ● -			
	45	-	-	C	● ● - - -				● - - - ● ● -			

6) For information about mounting designs, see section Mounting design.

7) F: fixed flange. L: loose flange.

8) Heavy duty bearing design is required due to the pump design.

Go to section "Selection of pump bearing design" in the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN733 and ISO 2858" to evaluate the service life of the bearing system.

Related information

Mounting design

NBG, NKG, 8-pole

50 Hz, 8-pole				NBG pumps			NKG pumps			Cast iron pump	Stainless steel pump			
Pump type	NBGE/ NKG			Material code	Options	Material code	Options	Flang e	Flange rating 10)	Flange rating standard	Flange rating 10)	Flange standard		
	P2 [kW]	No sensor	With integrated sensor											
350-300-305	11	-	-	C	• • - - -	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Double seal arrangement Cartridge seal, single or double Pump housing with feet Pump with base frame	A, B, C, D, S, T E, F, G, H K, M N, P I, J, L, R, U, W	Stuffing box Double seal arrangement Cartridge seal, single or double Standard bearing bracket Heavy duty bearing bracket	PN 10 PN 16 DIN, code F ANSI, code G JIS, code J	F F F	F F F	48 55 48	55 48 55
	15	-	-	C	• • - - -	• • - - -	• • - - -	• - - - -	• - - - -	PN 16 DIN, code F ANSI, code G JIS, code J	-	-	-	-
	18.5	-	-	C	• • - - -	• • - - -	• • - - -	• - - - -	• - - - -	PN 16 DIN, code F ANSI, code G JIS, code J	-	-	-	-

9) For information about mounting designs, see section Mounting design.

10) F: fixed flange. L: loose flange.

11) Heavy duty bearing design is required due to the pump design.

Go to section "Selection of pump bearing design" in the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN733 and ISO 2858" to evaluate the service life of the bearing system.

Related information

Mounting design

E-pumps

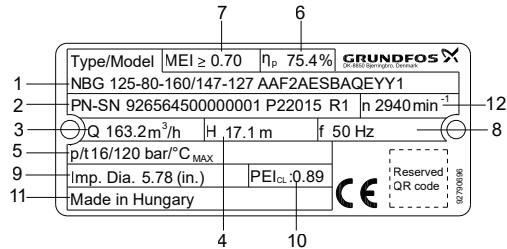
P2, motor [kW]	NBGE, NKGE ¹²⁾		NBGE, NKGE Series 2000 ¹³⁾	
	2-pole	4-pole	2-pole	4-pole
0.55	-	•	-	•
0.75	-	•	-	•
1.1	•	•	•	•
2.2	•	•	•	•
3	•	•	•	•
4	•	•	•	•
5.5	•	•	•	•
7.5	•	•	•	•
11	•	•	•	-
15	•	•	-	-
18.5	•	•	-	-
22	•	•	-	-
30	•	•	-	-
37	•	•	-	-
45	•	•	-	-
55	•	•	-	-

12) For the dimensions of NBGE, NKGE pumps, see sections NB dimensions and section NK dimensions.

13) For the dimensions of NBGE, NKGE Series 2000 pumps with factory-fitted differential-pressure sensor, see section NBE, NKE Series 2000 dimensions.

5. Identification

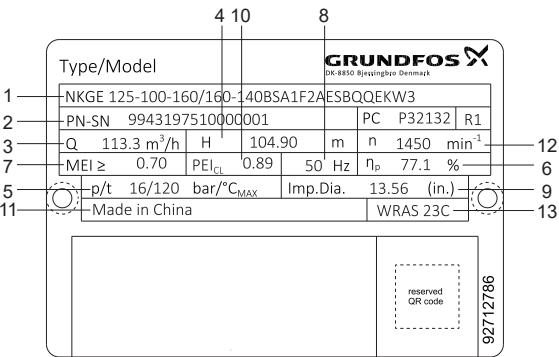
Nameplate, NBG, NKG



Example of NBG nameplate

Pos.	Description
1	Type designation
2	Identification code
92656450	Product number
00000001	Serial number
P2	Production site code
2015	Production year and week (YYWW)
R1	Range identification (service range code) /
3	Nominal flow rate
4	Nominal pump head
5	Pressure rating and maximum temperature
6	Hydraulic efficiency at best efficiency point
7	Minimum efficiency index
8	Frequency
9	Actual impeller diameter
10	Drinking water approval or Pump Energy Index (PEI) PEI _{CL} : constant load PEI _{VL} : variable load
11	Country of origin
12	Rated pump speed

TM084300



Example of NKG nameplate

Pos.	Description
1	Type designation
2	Identification code
99431975	Product number
10000001	Serial number
P3	Production site code
2132	Production year and week (YYWW)
R1	Range identification (service range code)
3	Nominal flow rate
4	Nominal pump head
5	Pressure rating and maximum temperature
6	Hydraulic efficiency at best efficiency point
7	Minimum efficiency index
8	Frequency
9	Actual impeller diameter
10	Pump Energy Index (PEI) PEI _{CL} : constant load PEI _{VL} : variable load
11	Country of origin
12	Rated pump speed
13	Drinking water approval

Type key, NBG, NBGE

Example 1: NBG 100-65-200/219VAAEF2KESBQQEKX4

Example 2: NBGE 200-150-315.2/317ACAEF3KFSDAQFYW1

Pos.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Example 1	NBG	100	-65	-200	/219	V	A		AE	F	2	K	E	S	BQQE	K	X	4
Example 2	NBGE	200	-150	-315.2	/317		A	C	AE	F	3	K	F	S	DAQF	Y	W	1

Pos. Explanation

- 1 Type range
- 2 Nominal diameter of inlet port (DN)
- 3 Nominal diameter of outlet port (DN)
- 4 Nominal impeller diameter [mm]
- 5 Actual impeller diameter [mm]

Impeller type

- 'blank': Closed impeller, cylindrical trim. If one dimension is shown, the impeller has a cylindrical trim, for example 219
- 6 'blank': Closed impeller, conical trim. If two dimensions are shown, the impeller has a conical trim, for example 160-142
- S: Special open impeller
- V: Super Vortex impeller

Hydraulic version

- A: 1st version
- 7 B: 2nd version
- C: 3rd version
- D: 4th version

Sensor/motor version

- 'blank': Pump without sensor
- C: Without built-in sensor, one cable and one pressure sensor are supplied with the pump
- 8 S: Pump with built-in differential-pressure sensor, Series 2000
- G: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with Grounding ring: Non drive-end
- H: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with hybrid bearing (HYB): Non drive-end
- I: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with insulated bearing: Non drive-end

Code for pump version; the codes may be combined

- A: Basic version
- B: Oversize motor
- C: Without motor
- 9 D: Pump housing with feet
- (+E): With ATEX approval, certificate or test report, the second character of the code for pump version is an E
- F: Design with base frame
- (+S): With support blocks, the second character of the pump version code is an S
- X: Special version; used in case of further customisation than already listed

Code for pipe connection

- E: Table E flange
- 10 F: DIN flange
- G: ANSI flange
- J: JIS flange

Flange pressure rating (PN - rated pressure)

- 1: 10 bar
- 2: 16 bar
- 11 3: 25 bar
- 4: 40 bar
- 5: Other pressure rating

Pos.	Explanation				
	Code for materials				
	Code	Pump housing	Impeller	Wear ring	Shaft
	A	EN-GJL-250	EN-GJL-200	Bronze/brass	1.4301/1.4308
	B	EN-GJL-250	Bronze CuSn10	Bronze/brass	1.4301/1.4308
	C	EN-GJL-250	EN-GJL-200	Bronze/brass	1.4401
	D	EN-GJL-250	Bronze CuSn10	Bronze/brass	1.4401
	E	EN-GJL-250	EN-GJL-200	EN-GJL-250	1.4301/1.4308
	F	EN-GJL-250	Bronze CuSn10	EN-GJL-250	1.4301/1.4308
	G	EN-GJL-250	EN-GJL-200	EN-GJL-250	1.4401
	H	EN-GJL-250	Bronze CuSn10	EN-GJL-250	1.4401
	I	1.4408	1.4408	1.4517	1.4462
	J	1.4408	1.4408	Carbon-graphite-filled PTFE (Graflon®)	1.4462
12	K	1.4408	1.4408	1.4517	1.4401
	L	1.4517	1.4517	1.4517	1.4462
	M	1.4408	1.4517	1.4517	1.4401
	N	1.4408	1.4408	Carbon-graphite-filled PTFE (Graflon®)	1.4401
	P	1.4408	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4401
	R	1.4517	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4462
	S	EN-GJL-250	1.4408	Bronze/brass	1.4401
	T	EN-GJL-250	1.4517	Bronze/brass	1.4462
	U	1.4408	1.4517	1.4517	1.4462
	W	1.4408	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4462
	Z	1.4469	1.4469	1.4410	1.4410
	X	Special version			
	Rubber parts in pump				
	E: EPDM				
	F: FXM (Fluoraz®)				
13	K: FFKM (Kalrez®)				
	M: FEPS (PTFE-sheathed silicone O-ring)				
	O: HNBR				
	V: FKM (Viton®)				
14	Shaft seal arrangement				
	S: Single seal				
15	Shaft seal in pump				
	Letter code for mechanical shaft seal and shaft seal rubber parts. See Letter codes for shaft seals.				
16	Code for rated motor power [kW]. See Codes for rated motor power.				
17	Code for phase and voltage [V] or other information. See Codes for phase and voltage or other information.				
18	Code for speed variant [rpm]. See Codes for speed variant.				

Example 1: NBG

100-65-200/219VAAEF2KESBQQEKX4 shows an NBG 100-65-200 pump with these characteristics:

- Super Vortex impeller
- hydraulic version A
- basic version
- with ATEX approval, certificate or report
- DIN flange to EN 1092-2 pipe connection
- 16 bar flange pressure rating
- stainless steel pump housing, EN 1.4408
- stainless steel impeller, EN 1.4408
- stainless steel wear ring, EN 1.4517
- stainless steel shaft, EN 1.4401
- EPDM O-rings for pump cover
- single shaft seal arrangement
- BQQE shaft seal
- 4 kW (3.7 hp) motor, US DOE regulated motor, 4-pole, 60 Hz.

Example 2: NBGE

200-150-315.2/317ACAEF3KFSDAQFYW1 shows an NBGE 200-150-315.2 pump with these characteristics:

- 317 mm closed impeller, cylindrical trim
- hydraulic version A
- without built-in sensor, one cable and one pressure sensor are supplied with the pump.
- pump with ATEX approval
- DIN flange to EN 1092-2 pipe connection
- 25 bar flange pressure rating
- stainless steel pump housing, EN 1.4408
- stainless steel impeller, EN 1.4408
- stainless steel wear ring, EN 1.4517
- stainless steel shaft, EN 1.4401
- FXM O-rings for pump cover
- single shaft seal arrangement
- DAQF shaft seal
- motor size outside DOE scope, not for sale in North America, 2-pole, 50 Hz.

Related information

[Letter codes for shaft seals](#)

[Codes for rated motor power](#)

[Codes for phase and voltage or other information](#)

[Codes for speed variant](#)

Type key, NKG, NKGE

Example 1: NKG 100-65-200/219VAZ1F2KESBQQEXX4

Example 2: NKGE 125-100-160/160-140BSA1F2AESBAQERW1

Example 3: NKGE 200-150-315.2/317ACA1F3AESDAQFYW4

Pos.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Example 1	NKG	100	-65	-200	/219	V	A		Z1	F	2	K	E	S	BQQE	X	X	4
Example 2	NKGE	125	-100	-160	/160-140		B	S	A1	F	2	A	E	S	BAQE	R	W	1
Example 3	NKGE	200	-150	-315.2	/317		A	C	A1	F	3	A	E	S	DAQF	Y	W	4

Pos.	Explanation
1	Type range
2	Nominal diameter of inlet port (DN)
3	Nominal diameter of outlet port (DN)
4	Nominal impeller diameter [mm]
5	Actual impeller diameter [mm]

Impeller type

'blank': Closed impeller, cylindrical trim. If one dimension is shown, the impeller has a cylindrical trim, for example 219

- 6 'blank': Closed impeller, conical trim. If two dimensions are shown, the impeller has a conical trim, for example 160-140
 S: Special open impeller
 V: Super vortex impeller

Hydraulic version

A: 1st version

- 7 B: 2nd version
 C: 3rd version
 D: 4th version

Sensor/motor version

'blank': Pump without sensor

C: Without built-in sensor, one cable and one pressure sensor are supplied with the pump.

- 8 S: Pump with built-in differential-pressure sensor, Series 2000
 G: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with Grounding ring: Non drive-end
 H: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with hybrid bearing (HYB): Non drive-end
 I: Non -E pump/ -E pump with semi-integrated VFD/CUE: Motor with insulated bearing: Non drive-end

Code for pump version; the codes may be combined

A1: Basic version, grease-lubricated standard bearing design, standard coupling

A2: Basic version, grease-lubricated standard bearing design, spacer coupling

B: Oversize motor

(+E): With ATEX approval, certificate or test report, the second character of the pump version code is an E

G1: Grease-lubricated heavy-duty bearing design, standard coupling

G2: Grease-lubricated heavy-duty bearing design, spacer coupling

H1: Oil-lubricated heavy-duty bearing design, standard coupling

H2: Oil-lubricated heavy-duty bearing design, spacer coupling

- 9 I1: Pump without motor, grease-lubricated standard bearing design, standard coupling
 I2: Pump without motor, grease-lubricated standard bearing design, spacer coupling
 J1: Pump without motor, grease-lubricated heavy-duty bearing design, standard coupling
 J2: Pump without motor, grease-lubricated heavy-duty bearing design, spacer coupling
 K1: Pump without motor, oil-lubricated heavy-duty bearing design, standard coupling
 K2: Pump without motor, oil-lubricated heavy-duty bearing design, spacer coupling
 Y1: Bare shaft pump, grease-lubricated standard bearing design
 W1: Bare shaft pump, grease-lubricated heavy-duty bearing design
 Z1: Bare shaft pump, oil-lubricated heavy-duty bearing design
 X: Special version; used in case of further customisation than already listed

Pipe connection

E: Table E flange

- 10 F: DIN flange
 G: ANSI flange
 J: JIS flange

Flange pressure rating (PN - rated pressure)

1: 10 bar

- 11 2: 16 bar

3: 25 bar

4: 40 bar

5: Other pressure rating

Pos.	Explanation				
	Code for materials				
	Code	Pump housing	Impeller	Wear ring	Shaft
A		EN-GJL-250	EN-GJL-200	Bronze/brass	1.4021/1.4034
B		EN-GJL-250	Bronze CuSn10	Bronze/brass	1.4021/1.4034
C		EN-GJL-250	EN-GJL-200	Bronze/brass	1.4401
D		EN-GJL-250	Bronze CuSn10	Bronze/brass	1.4401
E		EN-GJL-250	EN-GJL-200	EN-GJL-250	1.4021/1.4034
F		EN-GJL-250	Bronze CuSn10	EN-GJL-250	1.4021/1.4034
G		EN-GJL-250	EN-GJL-200	EN-GJL-250	1.4401
H		EN-GJL-250	Bronze CuSn10	EN-GJL-250	1.4401
I		1.4408	1.4408	1.4517	1.4462
J		1.4408	1.4408	Carbon-graphite-filled PTFE (Graflon®)	1.4462
K	12	1.4408	1.4408	1.4517	1.4401
L		1.4517	1.4517	1.4517	1.4462
M		1.4408	1.4517	1.4517	1.4401
N		1.4408	1.4408	Carbon-graphite-filled PTFE (Graflon®)	1.4401
P		1.4408	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4401
R		1.4517	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4462
S		EN-GJL-250	1.4408	Bronze/brass	1.4401
T		EN-GJL-250	1.4517	Bronze/brass	1.4462
U		1.4408	1.4517	1.4517	1.4462
W		1.4408	1.4517	Carbon-graphite-filled PTFE (Graflon®)	1.4462
Z		1.4469	1.4469	1.4410	1.4410
X		Special version			

Rubber parts in pump

E: EE

F: FF

G: FE

H: KE

I: KM

J: KV

K: KK

M: MN

N: ME

O: OO

V: VV

- 13 • The first letter indicates material of elastomer between pump housing and cover, and elastomer between cover and split cover.
 • The second letter indicates material of elastomer between split cover and seal housing.

See the material description in the table below.

Code	Material description
E	EPDM
F	FXM (Fluoraz®)
K	FFKM (Kalrez®)
M	FEPS (PTFE-sheathed silicone O-ring)
O	HNBR
V	FKM (Viton®)

Shaft seal arrangement

B: Stuffing box

C: Cartridge seal, single

- 14 D: Cartridge seal, double
 O: Back-to-back, double seal
 P: Tandem, double seal
 S: Single seal

Pos.	Explanation
	Shaft seal(s) in pump Letter or digit code for mechanical shaft seal and shaft seal rubber parts <ul style="list-style-type: none">• 4 letters: Single mechanical shaft seal, such as BQQE, or single cartridge seal, such as HBQV• 4 digits:<ul style="list-style-type: none">- double seal solution; example 2716, where 27 is DQQV, primary seal, and 16 is BQQV, secondary seal;- double cartridge seal; example 5150, where 51 is HQQU, primary seal, and 50 is HBQV, secondary seal
15	The relation between letters and digits of the shaft seals is described in Codes for shaft seals.
16	Code for rated motor power [kW]. See Codes for rated motor power.
17	Code for phase and voltage [V] or other information. See Codes for phase and voltage or other information.
18	Code for speed variant [rpm]. See Codes for speed variant.

Example 1: NKG 100-65-200/219VAZ1F2KESBQQEXX4 shows an NKG 100-65-200 pump with these characteristics:

- Super Vortex impeller
- hydraulic version A
- bare shaft pump, oil-lubricated heavy-duty bearing design
- DIN flange to EN 1092-2 pipe connection
- 16 bar flange pressure rating
- stainless steel pump housing, EN 1.4408
- stainless steel impeller, EN 1.4408
- stainless steel wear ring, EN 1.4517
- stainless steel shaft, EN 1.4401
- EPDM O-rings for pump cover and seal cover
- single shaft seal arrangement
- BQQE shaft seal
- bare shaft pump without motor, for 4-pole operation, 60 Hz.

Example 2: NKGE

125-100-160/160-140BSA1F2AESBAQERW1 shows an NKGE 125-100-160 pump with these characteristics:

- 160-140 mm closed impeller, conical trim
- hydraulic version B
- with built-in differential-pressure sensor
- grease-lubricated standard bearing design
- standard coupling
- DIN flange to EN 1092-2 pipe connection
- 16 bar flange pressure rating
- cast iron pump housing, EN-GJL-250
- cast iron impeller, EN-GJL-200
- bronze/brass wear ring
- stainless steel shaft, EN 1.4021/1.4034
- EPDM O-rings for pump cover and seal cover
- single shaft seal arrangement
- BAQE shaft seal
- 30 kW motor, not for sale in North America, 2-pole, 50 Hz.

Example 3: NKGE

200-150-315.2/317ACA1F3AESDAQFYW4 shows an NKG 200-150-315.2 pump with these characteristics:

- 317 mm closed impeller, cylindrical trim
- hydraulic version A
- without built-in sensor, one cable and one pressure sensor are supplied with the pump.
- grease-lubricated standard bearing design
- standard coupling
- DIN flange to EN 1092-2 pipe connection
- 25 bar flange pressure rating
- cast iron pump housing, EN-GJL-250
- cast iron impeller, EN-GJL-200
- bronze/brass wear ring
- stainless steel shaft, EN 1.4021/1.4034
- EPDM O-rings for pump cover and seal cover
- single shaft seal arrangement
- DAQF shaft seal
- motor size outside DOE scope, not for sale in North America, 4-pole, 60 Hz.

Related information

[Codes for shaft seals](#)

[Codes for rated motor power](#)

[Codes for phase and voltage or other information](#)

[Codes for speed variant](#)

Codes for shaft seals

The digits are only used for double shaft seal solutions.

Digits	Letters	Description
10	BAQE	Single mechanical shaft seal
12	BBQE	Single mechanical shaft seal
13	BBQV	Single mechanical shaft seal
15	BQQE	Single mechanical shaft seal
16	BQQV	Single mechanical shaft seal
19	AQAE	Single mechanical shaft seal
20	AQAV	Single mechanical shaft seal
21	AQQE	Single mechanical shaft seal
22	AQQV	Single mechanical shaft seal
23	AQQX	Single mechanical shaft seal
24	AQQK	Single mechanical shaft seal
25	DAQF	Single mechanical shaft seal
26	DQQE	Single mechanical shaft seal
27	DQQV	Single mechanical shaft seal
28	DQQX	Single mechanical shaft seal
29	DQQK	Single mechanical shaft seal
50	HBQV	Cartridge seal
51	HQQU	Cartridge seal
52	HAQK	Cartridge seal
	SNEA	Stuffing box
	SNEB	Stuffing box
	SNEC	Stuffing box
	SNED	Stuffing box
	SNOA	Stuffing box
	SNOB	Stuffing box
	SNOC	Stuffing box
	SNOD	Stuffing box
	SNFA	Stuffing box
	SNFB	Stuffing box
	SNFC	Stuffing box
	SNFD	Stuffing box

Letter codes for shaft seals

Pos. 15 in NBG, NBGE, NKG, NKGE type key example.

Code	Description	Explanation
B	Shaft seal type	A: O-ring seal with fixed driver B: Rubber bellows seal D: O-ring seal, balanced H: Cartridge seal, balanced
Q	Material of rotating seal face	A: Carbon, metal-impregnated with antimony which is not approved for potable water B: Carbon, resin-impregnated Q: Silicon carbide
Q	Material of stationary seal	A: Carbon, metal-impregnated with antimony which is not approved for potable water Q: Silicon carbide
E	Material of secondary seal and other rubber and composite parts, except the wear ring	E: EPDM V: FKM (Viton®) F: FXM (Fluoraz®) K: FFKM (Kalrez®) X: HNBR U: Dynamic O-rings in FFKM and static O-rings in PTFE

For a thorough description of shaft seal types and materials, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

Letter codes for stuffing boxes

Example: SNEA

Code	Description	Explanation
S	Stuffing box type	S: Packing type stuffing box
N	Cooling method	N: Uncooled stuffing box
E	Barrier liquid	E: With internal barrier liquid F: With external barrier liquid O: Without barrier liquid
A	Material	A: PTFE-impregnated fibre packing rings (Buraflon®) and EPDM O-rings in the pump housing B: Graphite-PTFE compound packing rings (Thermoflon®) and EPDM O-ring in the pump housing C: PTFE-impregnated fibre packing rings (Buraflon®) and FKM O-ring in the pump housing D: Graphite-PTFE compound packing rings (Thermoflon®) and FKM O-ring in the pump housing

For a thorough description of stuffing boxes and materials, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

Codes for rated motor power

Pos. 16 in NBG, NBGE, NKG, NKGE type key example.

Code	Description	
	[hp]	[kW]
A	0.16	0.12
B	0.25	0.18
C	0.33	0.25
D	0.5	0.37
E	0.75	0.55
F	1	0.75
G	1.5	1.1
H	2	1.5
I	3	2.2
J	4	3
K	5 (5.5 ¹⁴⁾)	3.7 (4 ¹⁴⁾)
L	7.5	5.5
M	10	7.5
N	15	11
O	20	15
P	25	18.5
Q	30	22
R	40	30
S	50	37
T	60	45
U	75	55
V	100	75
W	125	90
X	Bare shaft pump	
Y	> 200 ¹⁵⁾	> 150 ¹⁵⁾
1	150	110
2	175	132
3	200	150
4	215 ¹⁶⁾	160 ¹⁶⁾
5	250 ¹⁶⁾	185 ¹⁶⁾

¹⁴⁾ Value in bracket is for the standard IEC motor size. Value outside bracket is for the motor size according to NEMA standards.

¹⁵⁾ Used for pumps where the pump shaft input power exceeds 200 hp (150 kW) and is not regulated under the DOE pump rule.

¹⁶⁾ Special cases with power sizes above 200 hp (150 kW) which are still regulated under the DOE pump rule. For example: Pump has a P2 value of 198 hp (147.6 kW) in its duty point (in DOE scope) but customer wants the 215 hp (160 kW) motor instead of the 200 hp (150 kW). The pump is in scope of the DOE regulation and requires a PEI value and a motor code.

Codes for phase and voltage or other information

Pos. 17 in NBG, NBGE, NKG, NKGE type key example.

Code	Description
A	E-motor (ECM ¹⁷⁾), 1 x 200-240 V
B	E-motor (ECM ¹⁷⁾), 3 x 200-240 V
C	E-motor (ECM ¹⁷⁾), 3 x 440-480 V
D	E-motor (ECM ¹⁷⁾), 3 x 380-500 V
W	Not for sale in North America
X	No motor or US DOE regulated motor (CC marked motor)
Y	Out of DOE scope
Z	E-motor, asynchronous motor

¹⁷⁾ ECM: Electronically Commutated Motor.

Codes for speed variant

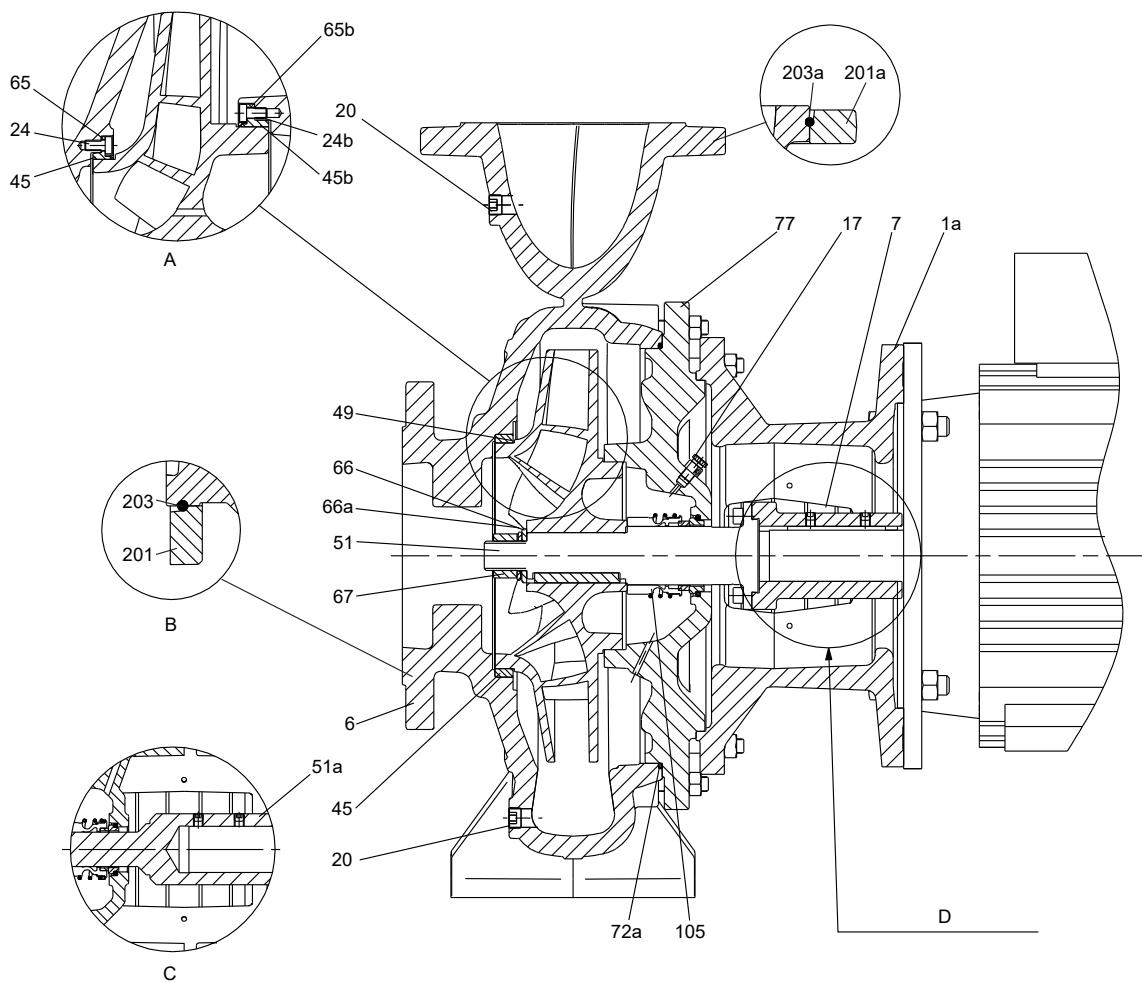
Pos. 18 in NBG, NBGE, NKG, NKGE type key example.

Code	Description
A	1450-2200 RPM, E-motor (ECM ¹⁸⁾)
B	2900-4000 RPM, E-motor (ECM ¹⁸⁾)
C	4000-5900 RPM, E-motor (ECM ¹⁸⁾)
1	2-pole, 50 Hz (Asynchronous motor)
2	2-pole, 60 Hz (Asynchronous motor)
3	4-pole, 50 Hz (Asynchronous motor)
4	4-pole, 60 Hz (Asynchronous motor)
5	6-pole, 50 Hz (Asynchronous motor)
6	6-pole, 60 Hz (Asynchronous motor)
7	8-pole, 50 Hz (Asynchronous motor)
8	8-pole, 60 Hz (Asynchronous motor)

¹⁸⁾ ECM: Electronically Commutated Motor.

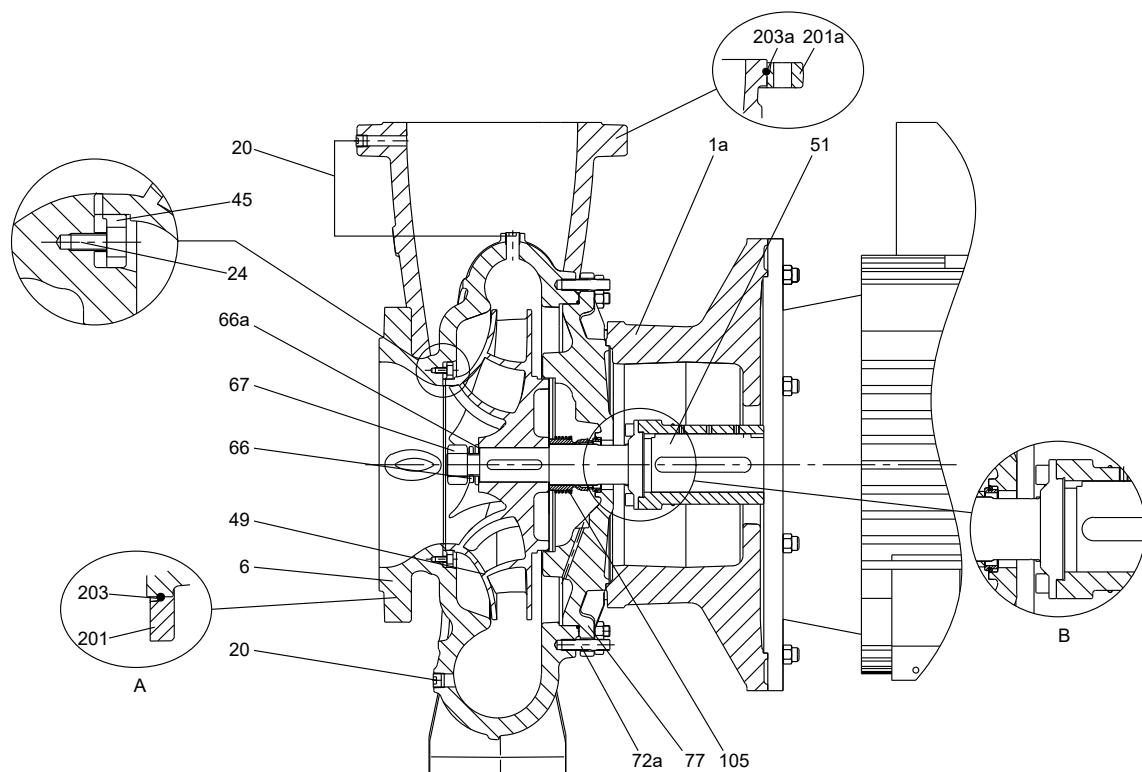
6. Construction

NBG, centre-line outlet



Sectional drawing, centre-line outlet

Pos.	Description
A	For stainless steel versions K, L, M, N, P, R, the wear rings are fitted by means of screws.
B	For some stainless steel versions, loose flanges are available.
C	Stub shaft
D	Two-part shaft

NBG, tangential outlet

TM051526

Sectional drawing, tangential outlet, DN 200 and DN 250

Pos.	Description
A	Stainless steel versions have loose flanges.
B	Two-part shaft

NBG, material specification

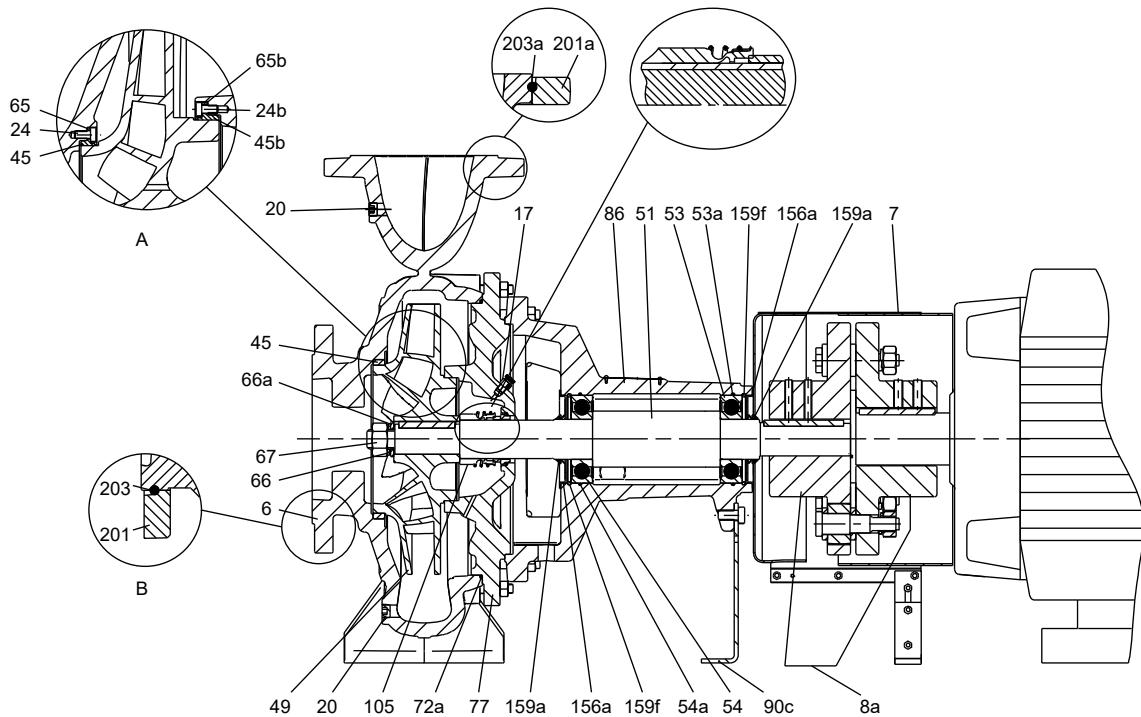
Pos.	Description	Materials	Material code																
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S
1a	Motor stool	EN-GJL-250	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		EN-GJL-250	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-
6	Pump housing	1.4408/CF8M	-	-	-	-	-	-	-	-	•	•	-	•	•	-	-	•	•
		1.4517/CD4MCuN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7	Coupling guard	1.4301/AISI 304	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Air vent plug	2.0401/CuZn44Pb2	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-
17	Hexagon socket head plug	1.4401/AISI 316	-	-	-	•	-	-	-	-	•	•	-	•	•	-	•	•	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	•	-	-
		ISO 898 8.8 carbon steel	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-
20	Hexagon socket head plug	1.4401/AISI 316	-	-	-	•	-	-	-	-	•	•	-	•	•	-	•	•	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24	Hexagon socket head cap screw	1.4401/AISI 316	-	-	-	-	-	-	-	-	•	•	-	•	•	-	•	•	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24b	Hexagon socket head cap screw	1.4401/AISI 316	-	-	-	-	-	-	-	-	•	•	-	•	•	-	•	•	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		CuSn10	•	•	•	•	-	-	-	-	-	-	-	-	-	•	•	-	-
		CuZn34Mn3Al2Fe1-C	•	•	•	•	-	-	-	-	-	-	-	-	-	•	•	-	-
45	Wear ring	EN-GJL-250	-	-	-	-	•	•	•	•	-	-	-	-	-	-	-	-	-
		1.4517/CD4MCuN	-	-	-	-	-	-	-	-	•	•	-	•	•	-	-	•	-
		Carbon-graphite filled PTFE (Graflon®)	-	-	-	-	-	-	-	-	•	•	-	•	•	-	•	•	-

Pos.	Description	Materials	Material code																	
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T
45b	Wear ring	1.4517/CD4MCuN Carbon-graphite filled PTFE (Graflon®)	-	-	-	-	-	-	-	•	•	•	-	-	-	-	-	•	-	-
		EN-GJL-200	•	•	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-
49	Impeller	CuSn10 1.4408/CF8M 1.4517/CD4MCuN	-	•	-	•	-	•	-	•	-	-	-	-	-	-	-	-	-	-
		1.4301 ¹⁹⁾ + 1.0569/AISI 304 + carbon steel	•	•	-	-	•	•	-	-	-	-	-	-	-	-	-	-	-	-
51	2-part shaft	1.4401 ²⁰⁾ + 1.0569/AISI 316 + carbon steel 1.4462 ²¹⁾ + 1.0569/ASTM J92205 + carbon steel	-	-	•	•	-	-	•	•	-	•	-	•	•	•	-	•	-	•
51a	Stub shaft	1.4301/AISI 304 1.4401/AISI 316	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
65	Wear ring retainer	1.4517/CD4MCuN	-	-	-	-	-	-	-	•	-	-	•	•	•	-	-	-	-	-
65b	Wear ring retainer	1.4517/CD4MCuN	-	-	-	-	-	-	-	•	-	-	•	•	•	-	-	-	-	-
		1.4301/AISI 304	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
66	Washer	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	•	-	-	•	•	-	•	-	•	•	-	•	-	•	-
		1.4301/AISI 304	•	•	-	-	•	•	-	-	-	-	-	-	-	-	-	-	-	-
66a	Spring lock washer	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	•	-	-	•	•	-	•	-	•	-	-	•	-	•	-
		1.4301/AISI 304	•	•	-	-	•	•	-	-	-	-	-	-	-	-	-	-	-	-
67	Impeller nut	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	•	-	-	•	•	-	•	-	•	-	-	•	-	•	-
72a	O-ring	E / F / K / M / V / X	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		EN-GJL-250	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
77	Cover	1.4408/CF8M 1.4517/CD4MCuN	-	-	-	-	-	-	•	•	-	•	-	•	-	-	•	-	•	-
105	Shaft seal	Burgmann 1.4401/AISI 316 Burgmann 2.4610/Hastelloy C-4	•	•	•	•	•	•	•	•	-	•	-	•	-	•	•	•	•	•
201	Loose flange, inlet	GGG50/1.4408/ASTM CF8M	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•
201a	Loose flange, outlet	GGG50/1.4408/ASTM CF8M	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•
203	Retainer, inlet	1.4310	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•
203a	Retainer, outlet	1.4310	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•	•	•

19) Dependent on sub-supplier of shaft, 1.4301 may also be supplied in material 1.4308.

20) Dependent on sub-supplier of shaft, 1.4401 may also be supplied in material 1.4408.

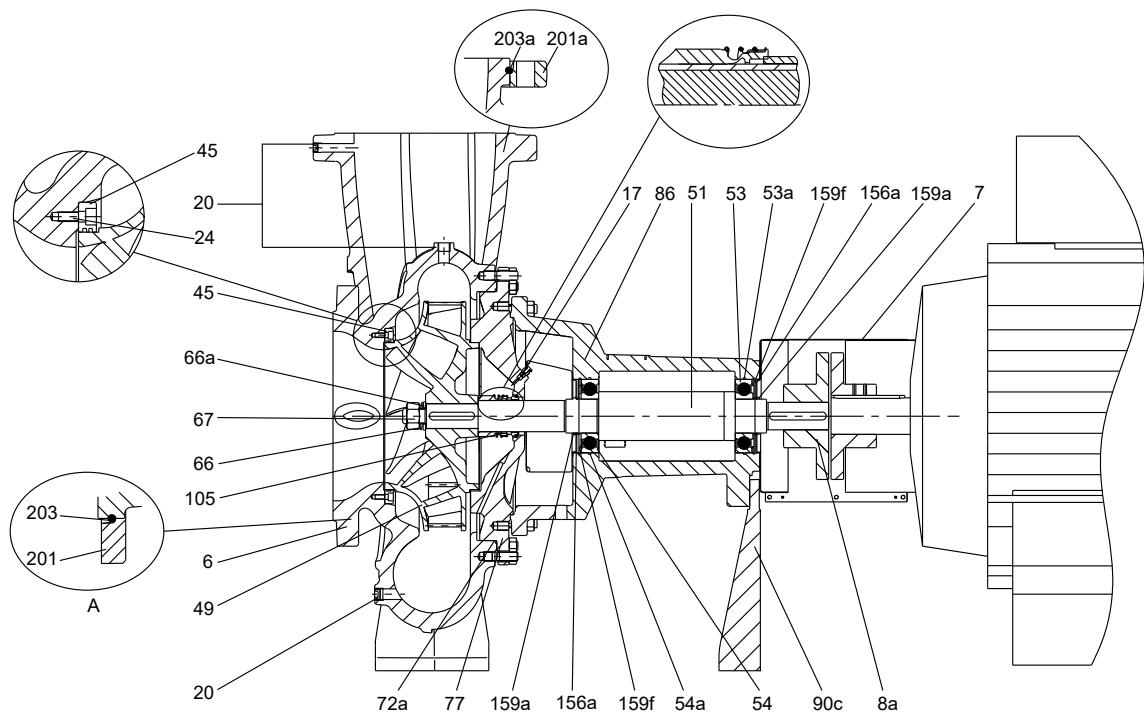
21) Dependent on sub-supplier of shaft, 1.4462 may also be supplied in material 1.4517 or 1.4410.

NKG, centre-line outlet

TM067239

*Sectional drawing, centre-line outlet***Pos. Description**

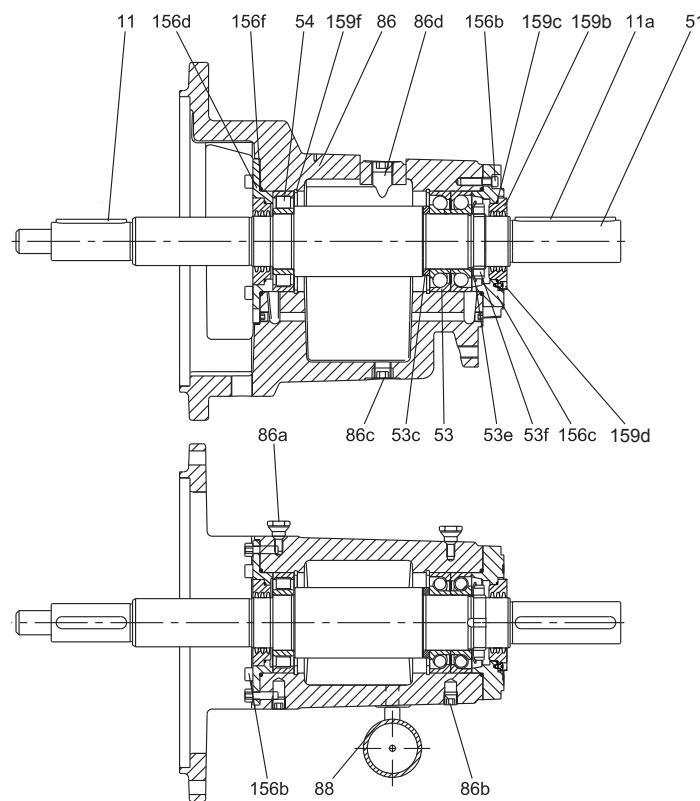
- A For stainless steel versions K, L, M, N, P, R, the wear rings are fitted by means of screws.
- B For some stainless steel versions, loose flanges are available.

NKG, tangential outlet

TM051528

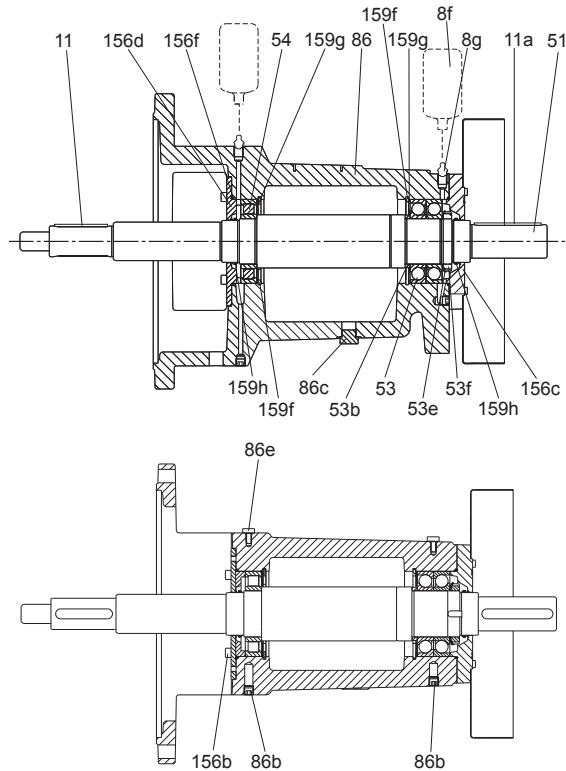
*Sectional drawing, with tangential outlet, DN 200 and DN 250***Pos. Description**

A250 Stainless steel versions have loose flanges.

NKG, bearing bracket, oil-lubricated

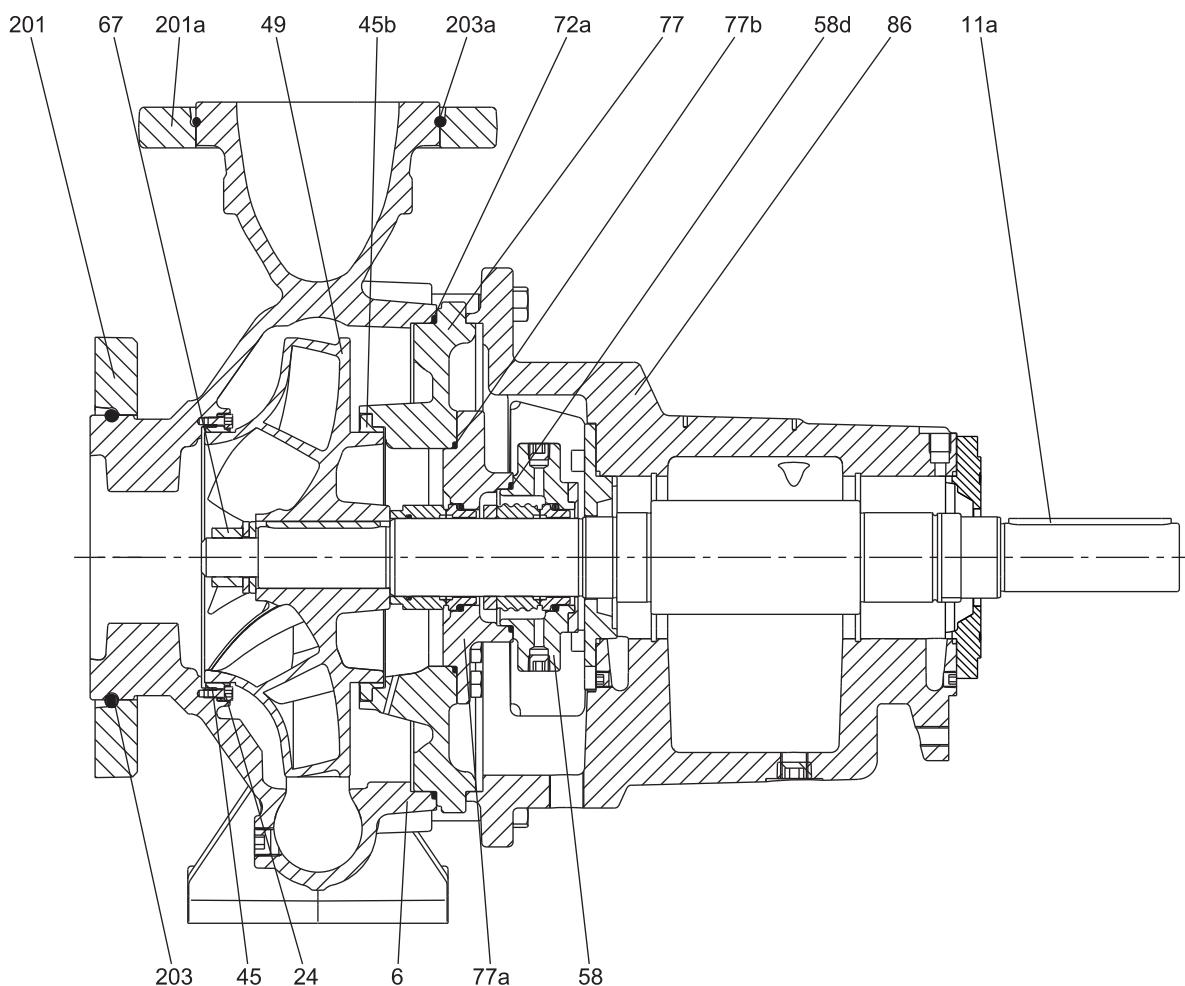
TMO5988

Sectional drawing, bearing bracket, oil-lubricated

NKG, bearing bracket, grease-lubricated

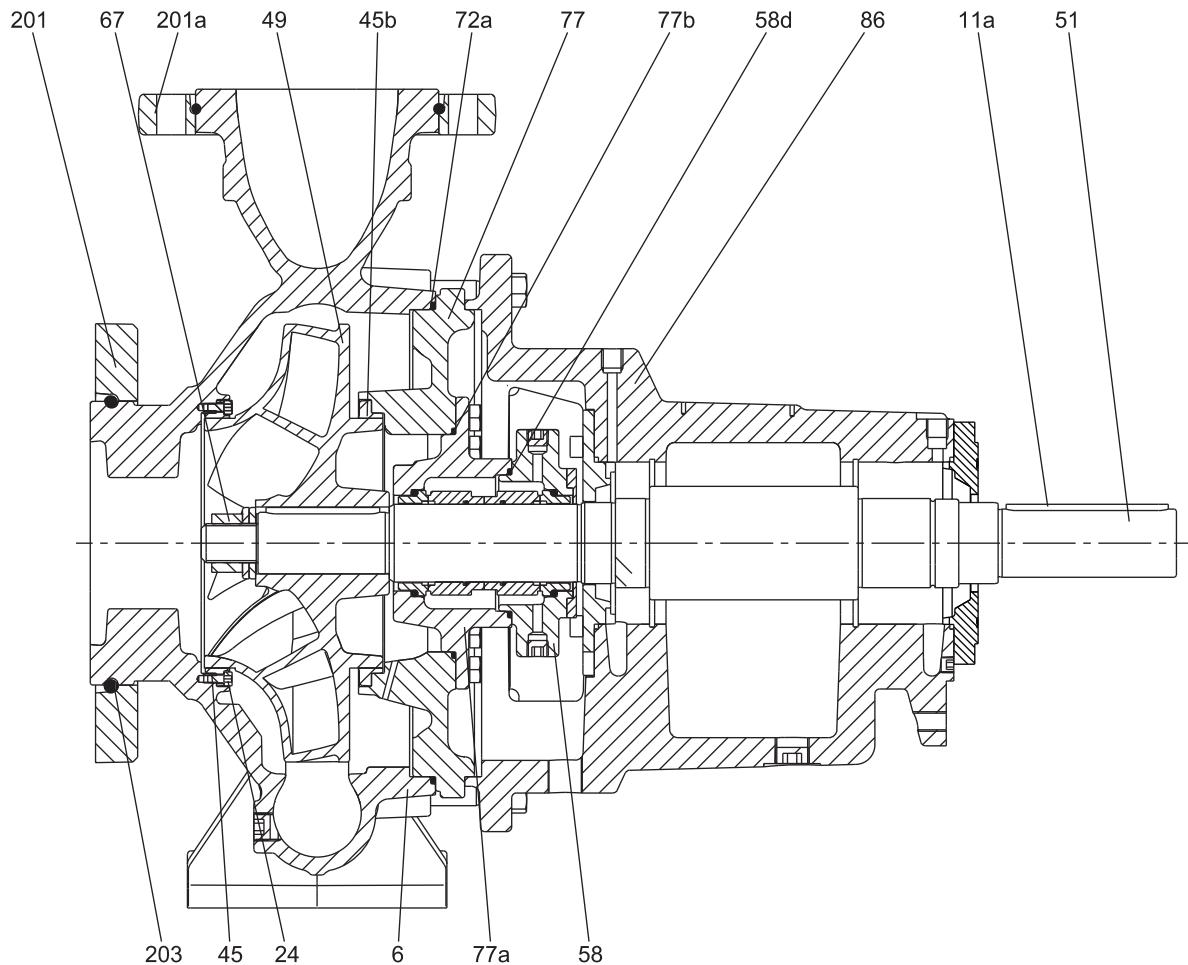
TM050989

Sectional drawing, bearing bracket, grease-lubricated

NKG, double seal, tandem

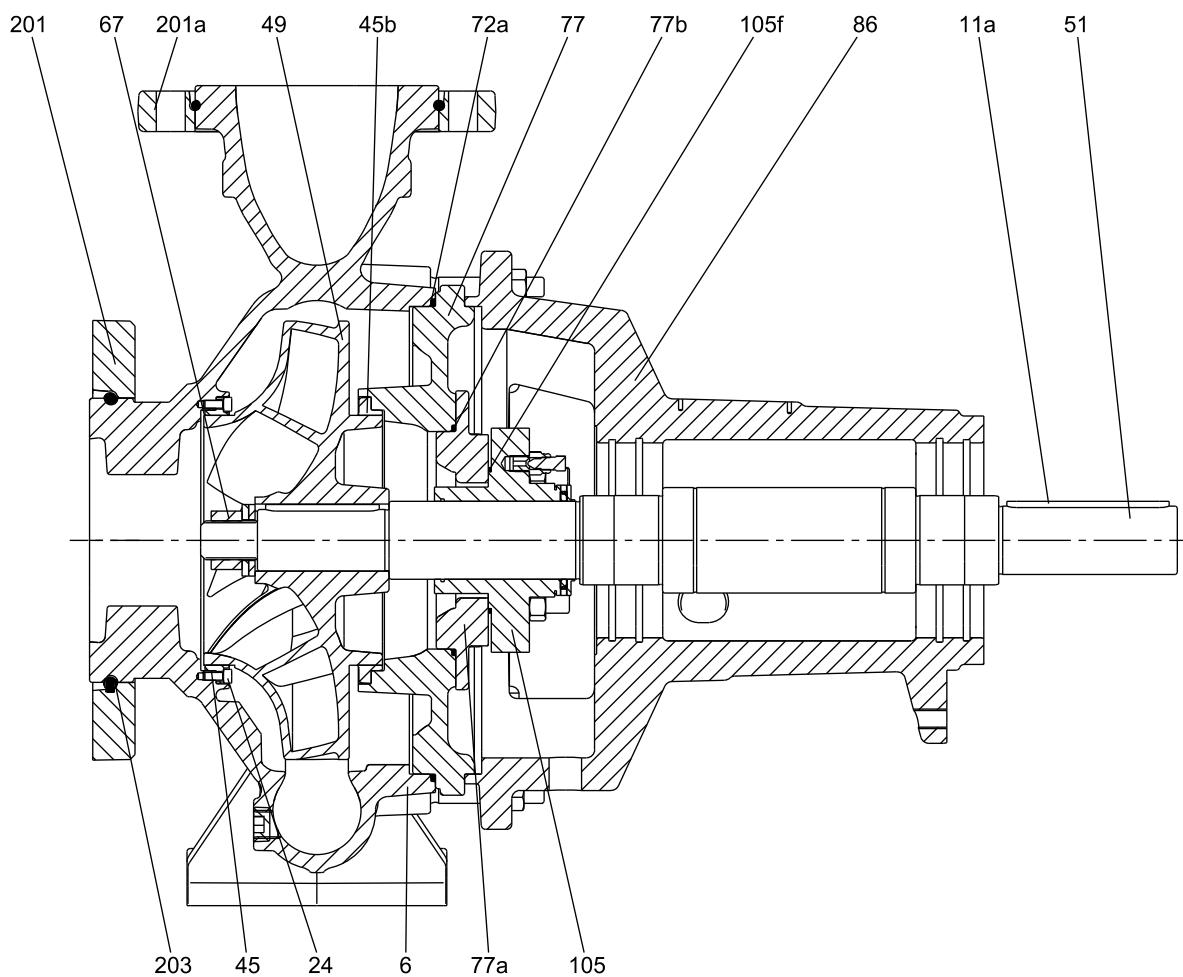
TM05990

Sectional drawing, double tandem seal arrangement

NKG, double seal, back to back

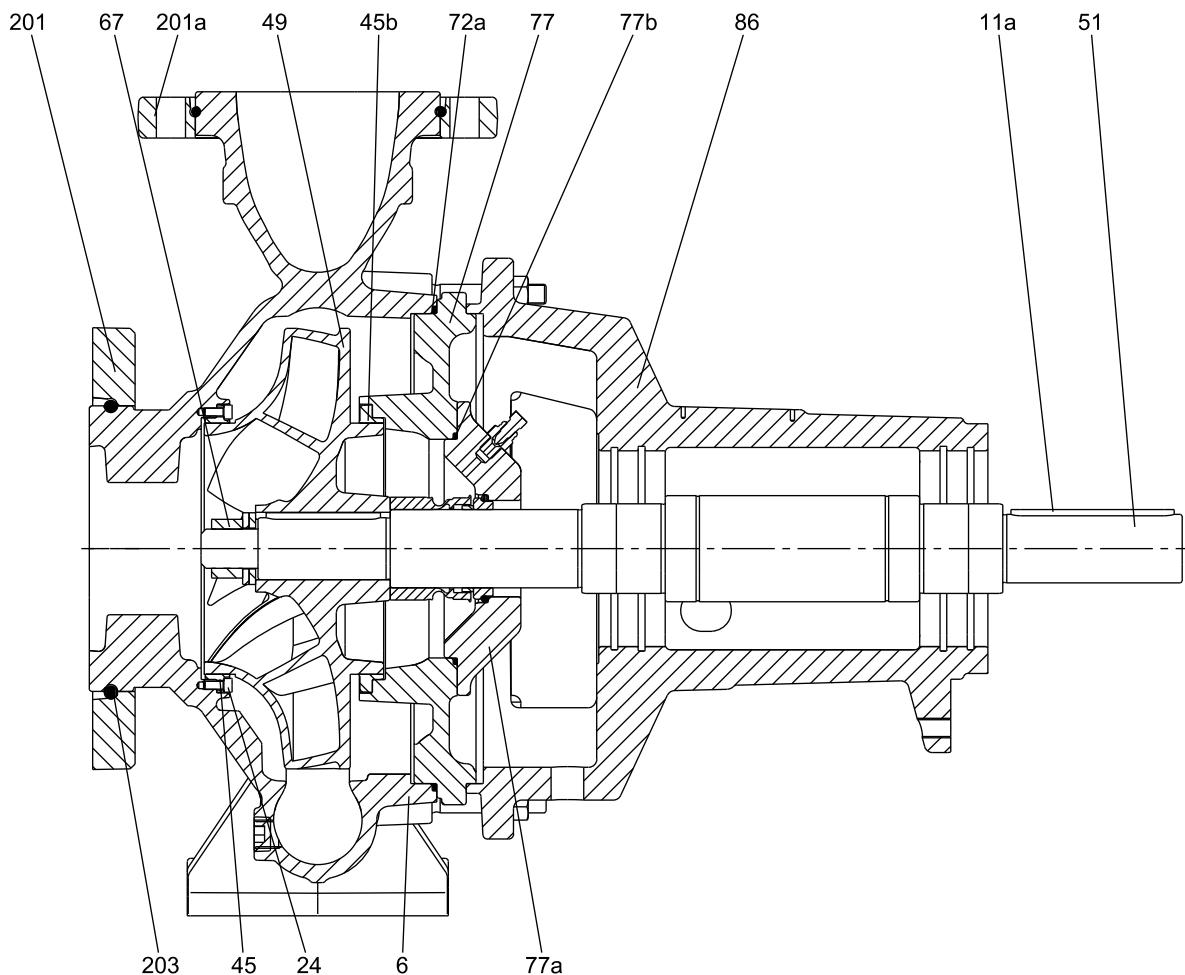
TM050991

Sectional drawing, double seal, back-to-back seal arrangement

NKG, cartridge solution

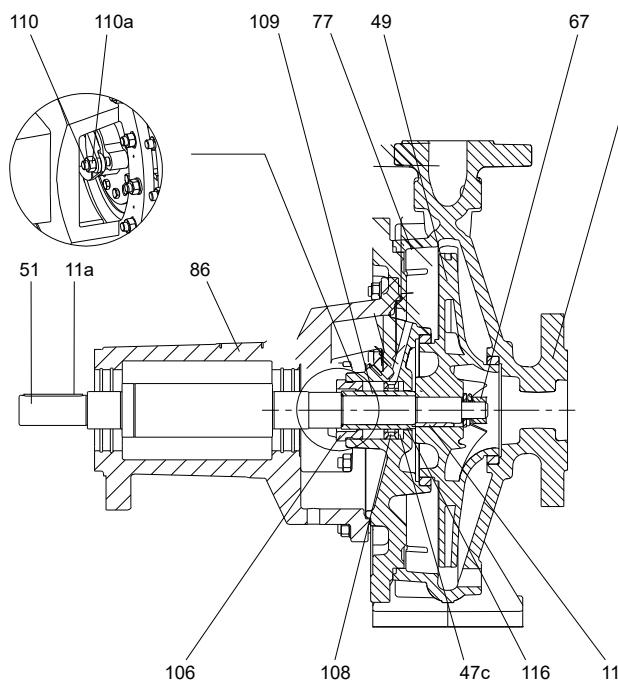
TM05092

Sectional drawing, cartridge solution

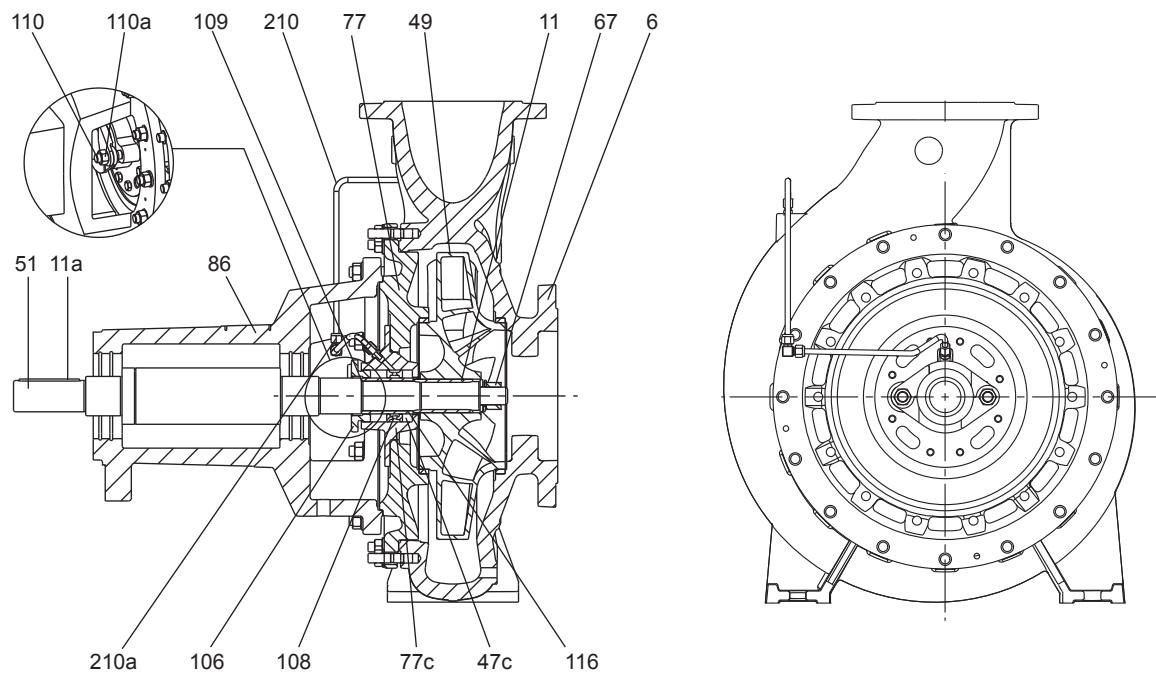
NKG, single seal, split cover

TM050993

Sectional drawing, single seal, split cover

NKG, stuffing box

TM066931

Sectional drawing, stuffing box, single cover

TM066932

Sectional drawing, stuffing box, split cover

NKG, material specification

Pos.	Description	Materials	Material code																	
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T
6	Pump housing	EN-GJL-250 1.4408/CF8M 1.4517/CD4MCuN	•	•	•	•	•	•	•	-	-	-	-	-	-	-	•	•	-	-
7	Coupling guard	1.4301/AISI 304	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8a	Coupling	See table below	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8f	Grease cartridge	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8g	Grease nipple	Copper	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
11	Key	1.4401/AISI 316	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
11a	Key	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Air vent plug	2.0401/CuZn44Pb2	•	•	•	-	•	•	•	•	-	-	-	-	-	-	-	-	-	-
17	Hexagon socket head plug	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
		ISO 898 8.8 carbon steel	•	•	•	-	•	•	•	•	-	-	-	-	-	-	-	-	-	-
20	Hexagon socket head plug	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
24	Hexagon socket head cap screw	1.4401/AISI 316 1.4539/AISI 904L	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
24b	Hexagon socket head cap screw	1.4401/AISI 316 1.4539/AISI 904L	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
		CuSn10	•	•	•	-	-	-	-	-	-	-	-	-	-	-	•	•	-	-
		CuZn34Mn3Al2Fe1-C	•	•	•	-	-	-	-	-	-	-	-	-	-	-	•	•	-	-
45	Wear ring	EN-GJL-250 1.4517/CD4MCuN Carbon-graphite filled PTFE (Graflon®)	-	-	-	•	•	•	•	•	-	-	-	-	-	-	•	•	-	-
45b	Wear ring	1.4517/CD4MCuN Carbon-graphite-filled PTFE (Graflon®)	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
47c	Packing ring	Buraflon®/Thermoflon®	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		EN-GJL-200	•	-	•	-	•	-	-	-	-	-	-	-	-	-	-	-	-	-
49	Impeller	CuSn10 1.4408/CF8M 1.4517/CD4MCuN	-	•	-	•	-	•	-	-	•	•	•	•	•	•	•	•	•	•
	Shaft + Sleeve	1.0503 + 1.4301	•	•	-	•	-	•	-	-	-	-	-	-	-	-	-	-	-	-
51	Shaft	1.4401 1.4462	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
53	Deep-groove ball bearings	2ZR.C3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Angular contact bearing	BECBJ (SKF)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
53a	O-ring	EPDM/FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
53b	Spacer ring	1.4301	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
53c	Spacer ring, inner	1.4301	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
53e	Lock washer	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
53f	Lock nut	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
54	Deep-groove ball bearings	2ZR.C3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Roller bearing	ECJ (SKF)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
54a	O-ring	EPDM/FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
58	Seal housing	1.4517/CD4MCuN	•	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
58d	O-ring	E / F / K / M / V / X	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
65	Wear ring retainer	1.4517/CD4MCuN	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
65b	Wear ring retainer	1.4517/CD4MCuN	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	•
		1.4301/AISI 304	•	•	-	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-
66	Washer	1.4401/AISI 316 1.4539/AISI 904L	-	-	•	•	•	-	•	•	•	•	•	•	•	•	•	•	•	•

Pos.	Description	Materials	Material code																	
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T
66a	Spring lock washer	1.4301/AISI 304	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		1.4401/AISI 316	-	-	•	-	-	-	•	•	•	•	•	-	•	•	-	•	-	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	•	-	-	-	-	•	-	•	-	-
67	Impeller nut	1.4301/AISI 304	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		1.4401/AISI 316	-	-	•	•	-	-	•	•	•	•	•	-	•	•	-	•	-	•
		1.4539/AISI 904L	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
72a	O-ring	E / F / K / M / V / X	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		EN-GJL-250	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	-
77	Cover	1.4408/CF8M	-	-	-	-	-	-	-	•	•	-	-	•	•	-	-	•	-	•
		1.4517/CD4MCuN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
77a	Seal cover	1.4517/CD4MCuN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		1.4408	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
77b	O-ring	E / F / K / M / V / X	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4517/CD4MCuN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
77c	Packing housing	Cast iron	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4408	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
86	Bearing bracket	EN-GJL-250	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
86a	SPM fitting	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
86b	Plug	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
86c	Plug	Composite	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
86d	Venting plug	Composite	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
86e	Screw	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
88	Constant-level oiler	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
90c	Foot	EN-GJL-250/1.0338/carbon steel DC04	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
105	Shaft seal	Burgmann 1.4401/AISI 316	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		Burgmann 2.4610/Hastelloy C-4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
105f	Gasket for cartridge seal	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
106	Gland	Cu42Si10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4408	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4517	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
108	Distribution ring	1.4301	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4462	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
109	O-ring	EPDM/FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110	Bolt	A2-70	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110a	Nut	A2-70	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
116	Shaft sleeve	1.4034/1.4021	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
		1.4404/1.4401	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		1.4462	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
156a	Cover, bearing	1.0338/carbon steel DC04	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
156b	Screw	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
156c	Cover end, bearing bracket	EN-GJL-250	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
156d	Cover front, bearing bracket	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
156f	O-ring for cover, bearing bracket	FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159a	Thrower	EPDM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159b	Labyrinth seal	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159c	O-ring for labyrinth seal	FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159d	Screw	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159f	Locking ring, circlip	DIN 472 (C75 DIN17 222)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159g	Sealing spacer	Steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
159h	Bearing bracket seal	FKM	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
201	Loose flange, inlet	GGG50/1.4408/ASTM CF8M	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
201a	Loose flange, outlet	GGG50/1.4408/ASTM CF8M	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
203	Retainer, inlet	1.4310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Pos.	Description	Materials	Material code																	
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T
203a	Retainer, outlet	1.4310	-	-	-	-	-	-	-	•	•	•	•	•	•	•	-	•	•	•
210	Flushing pipe	1.4401 1.4462	•	•	•	•	•	•	•	•	-	•	•	-	•	•	•	•	•	•
210a	Compression fitting	1.4401 1.4462	•	•	•	•	•	•	•	•	-	•	•	-	•	•	•	•	•	•

Material of coupling (8a)

Coupling type	Pole	Motor size	Material
Standard coupling	2	Up to 22 kW	EN-GJL-250
		From 30 kW	EN-GJS-450-10
	4	Up to 30 kW	EN-GJL-250
		From 37 kW	EN-GJS-450-10
	6	Up to 37 kW	EN-GJL-250
		From 45 kW	EN-GJS-450-10
Spacer coupling	All	All	EN-GJL-250

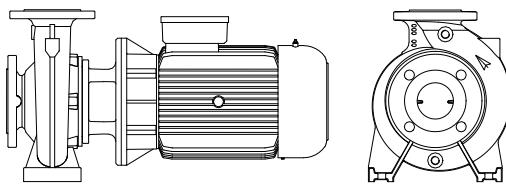
Note: Other configurations are available on request.
Please contact Grundfos.

Mechanical construction

Mounting design

NBG pumps come in these mounting designs:

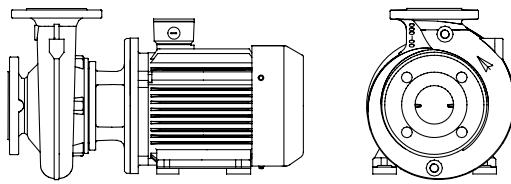
Mounting design A: pump housing with feet



TM025509

Mounting design A

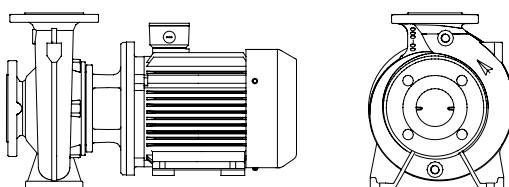
Mounting design B: motor with feet



TM025510

Mounting design B

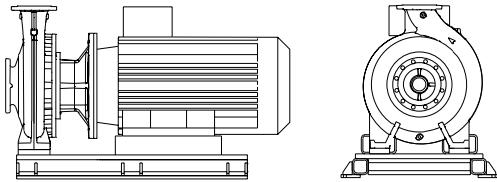
Mounting design C: pump housing and motor with feet



TM025511

Mounting design C

Mounting design F: design C with base frame.



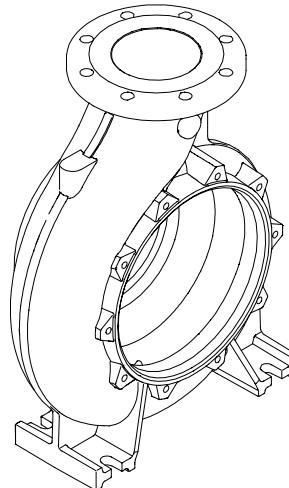
TM040483

Mounting design F

Pump housing

The volute pump housing has an axial inlet port and a radial outlet centre-line port. Flange dimensions are in accordance with EN 1092-2.

For DN 200 outlet and above, the outlet port is tangential. The pump houses have both a priming and a drain hole closed by plugs.



TM030232

NBG and NKG pump housing with centre-line outlet

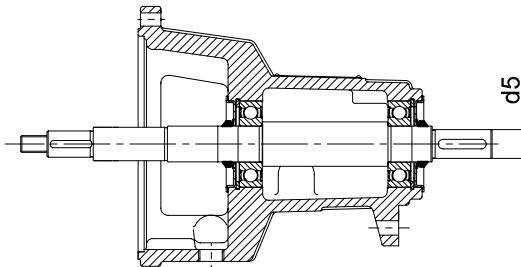
Bearing bracket and shaft

The bearing bracket has two sturdy anti-friction, lubricated-for-life bearings.

The bearing bracket is made of cast iron EN-GJL-250.

The shaft is made of stainless steel. Shaft diameter d5 is either Ø24, Ø32, Ø42, Ø48 or Ø60 where the coupling is mounted.

A thrower on the shaft prevents liquid from entering the bearing bracket. In stuffing box versions, the shaft is protected by a stainless steel sleeve.



TM030233

Bearing bracket and shaft

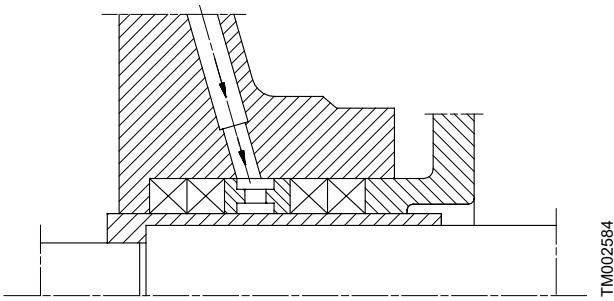
All NKG pumps are fitted with one of five shaft, shaft seal and bearing sizes. As the bearings and shafts are large, the NKG pumps can be driven by a belt drive or a diesel engine, if required.

For prolonged lifetime and to suit high inlet pressure, heavy duty bearing brackets are available. See the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858", or contact Grundfos.

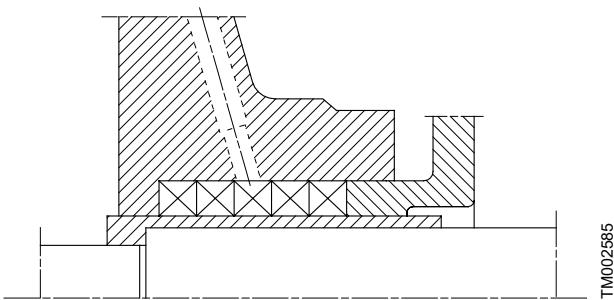
Stuffing boxes

Stuffing boxes are available as pure packing rings or as packing rings with graphite seals. Stuffing box packing rings with graphite seals have proven their qualities in a wide range of applications, especially under extreme conditions, such as high pressure or high temperature, or operation with oils or aggressive liquids.

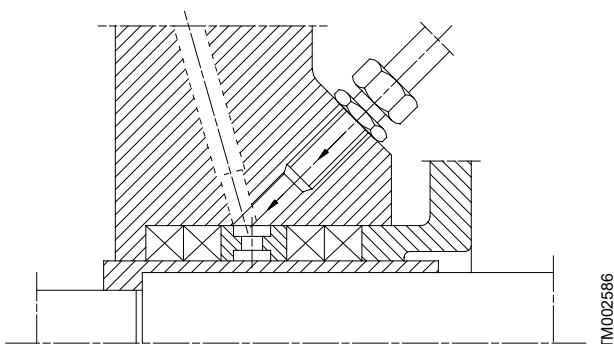
Braided material is effective for ensuring long service life for packing rings while protecting the shaft sleeve when used in pumps. When fitted, these packing rings are symmetrical, having parallel facings that rule out tilting.



Uncooled stuffing box, type SNE(x), with internal barrier liquid for the pumping of clean liquids in suction operation or at inlet pressures up to 4 bar



Uncooled stuffing box, type SNO(x), without internal barrier liquid for the pumping of clean liquids in suction operation or at inlet pressures over 4 bar



Uncooled stuffing box, type SNF(x), with external barrier liquid for the pumping of contaminated and malodorous liquids and for applications with continuous vacuum on the inlet (constant inlet pressure below atmosphere pressure)

Pump cover design

Material code	A/B/C/D/E/F/G/H/S/T	I/J/K/L/M/N/P/R/U/W
Pump shaft diameter d5 [mm]	Pump cover design	
24	Single ²²⁾	Split ²³⁾
32	Single ²²⁾	Split ²³⁾
42	Single ²²⁾	Split ²³⁾
48	Split ²³⁾	Split ²³⁾
60	Split ²³⁾	Split ²³⁾

22) See fig. Sectional drawing, stuffing box, single cover.

23) See fig. Sectional drawing, stuffing box, split cover.

Related information

[NKG, stuffing box](#)

Motor stool and cover

The cover is provided with a manual air vent screw for the venting of the pump housing and the shaft seal chamber. An O-ring forms the seal between cover and pump housing.

Coupling guards are fitted to the motor stool.

The mounting designations of motors for NBG, NBGE are as follows:


- IM B5: up to and including frame size 132.
- IM B35: as from frame size 160 and upwards.

The flange size of the motor stool is according to IEC 60034.

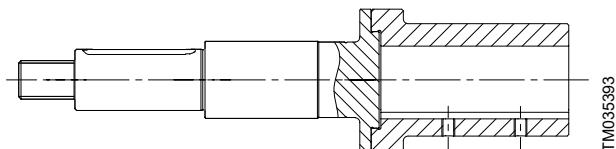
Shaft

The stainless steel shaft is Ø28, Ø38, Ø48, Ø55 or Ø60 where the shaft seal is mounted.

The coupling end of the shaft is cylindrical and has two drilled holes for the set screws of the coupling.



Stub shaft, NBG pump




2-part stub shaft, NBG pump

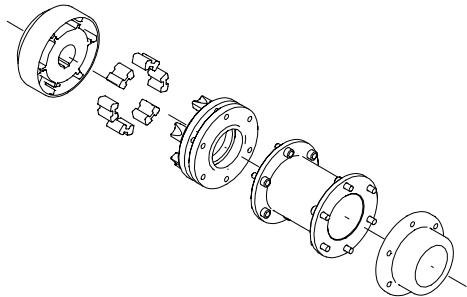
Coupling

NKG pumps are available with two types of coupling:

- standard coupling
- spacer coupling.



Standard coupling




Spacer coupling

Pumps fitted with a spacer coupling can be serviced without dismantling the motor from the base frame and without removing the pump housing from the pipes. This saves realignment of pump and motor after service.

For couplings for ATEX-approved pumps, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

Impeller

The impeller is a closed impeller with double-curved blades with smooth surfaces. This ensures high efficiency.



Impeller, NBG and NKG pumps

All impellers are statically and hydraulically balanced. The hydraulic balancing compensates for axial thrust.

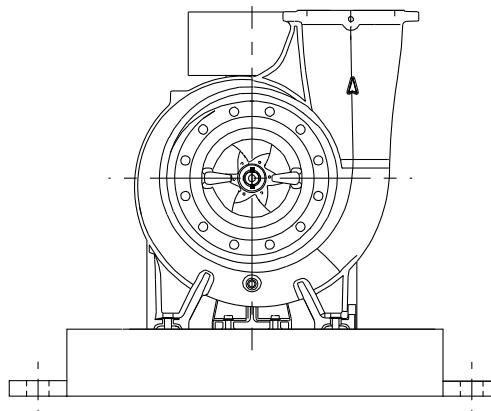
The direction of rotation of the impeller is clockwise when viewed from the motor.

All impellers can be adapted to the duty point as requested by the customer.

Base frame

NKG pumps are available with two types of base frame.

EN/ISO base frame



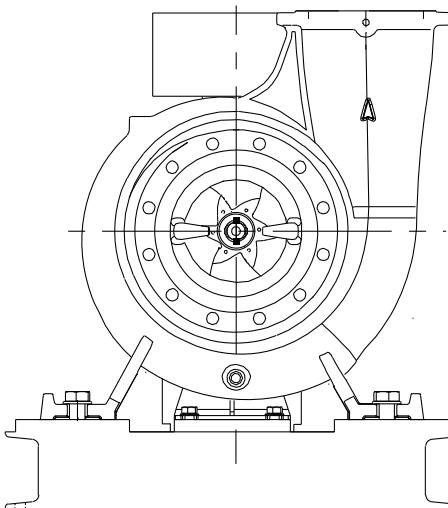
TM080473

Schematic view of NKG pump mounted on an EN/ISO base frame

Pump and motor are mounted on a common steel base frame in accordance with EN 23661. The largest base frames, larger than size 9, are not described in any standard and therefore not in accordance with EN 23661.

The base frame may be longer than the pump and motor. An EN/ISO base frame prepared for grouting is available as an option. See fig. Base frame prepared for grouting.

C-channel base frame



TM080474

Schematic view of NKG pump mounted on a C-channel base frame

Pump and motor are mounted on a common steel base frame optimised for the length of the pump and motor. Dimensions are not in accordance with EN 23661. All C-channel base frames can be grouted.

Related information

[Foundation and grouting](#)

Surface treatment

The cast iron parts of NBG and NKG pumps have an epoxy-based coating made in a cathodic electro-deposition CED process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment. The entire process consists of these elements:

- alkaline-based cleaning
- zinc phosphating
- cathodic electro-deposition
- curing to a dry film thickness of 18-22 µm.

The colour code for the finished product is NCS 9000/AL 9005.

For low-temperature applications at high humidity, Grundfos offers NBG and NKG pumps with extra surface treatment to avoid corrosion. These pumps are available on request.

Test pressure

Pressure testing was made with 20 °C water containing corrosion inhibitor.

Pressure stage	Operating pressure		Test pressure	
	[bar]	[MPa]	[bar]	[MPa]
PN 10	10	1.0	15	1.5
PN 16	16	1.6	24	2.4
PN 25	25	2.5	37.5	3.75

Motors and drives

For NBG, NBGE, NKG, NKGE pumps Grundfos can provide a wide range of motors and drives within these two main categories:

- standard motors
- speed-controlled motors.

Standard motors are mains-operated whereas the speed-controlled motors can be started and operated in various ways.

The speed-controlled NBG, NKG pumps can be driven in two ways:

- by a standard motor with an external frequency converter. The frequency converter can be a Grundfos CUE solution or another make.
- by a motor with an integrated frequency converter, a Grundfos MGE motor.

Standard motors

The motor is a totally enclosed, fan-cooled standard motor with main dimensions according to IEC and DIN standards. Electrical tolerances are to IEC 60034.

Motor protection

Three-phase motors must be connected to a motor-protective circuit breaker according to local regulations.

Three-phase Grundfos MG motors as from 3 kW have a built-in PTC thermistor according to DIN 44082 (IEC 34-11: TP 211).

Energy efficiency classification

IE1 IE2 IE3
IE4 IE5

Grundfos does not offer IE1 motors any longer and only offers IE2 motors for 4-pole from 0.25 -0.55 kW.

Standard motor ranges

The table shows the range of standard motors currently used for NBG, NKG pumps. The motors stated in section Dimensional drawings and technical data are MG and Siemens motors.

IE class	Motor	Pole	P2 [kW]																														
			0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200	250	315	355			
IE2	MG	4	-	●	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
	MG	2	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
		2	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
	Siemens	4	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
-IE3		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
		8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	MMG-G	2	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		4	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Siemens	2	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		4	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
IE4		6	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		2	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	MMG-G	4	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
IE5	Nidec	2	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		4	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Note: Not all motor makes are available worldwide. For specific information about the motor makes available in your region, contact your Grundfos Customer Service Unit (CSU).

Speed-controlled standard motors

General considerations

If you connect an external frequency converter to your standard motor, the motor insulation is exposed to higher voltage peaks due to the operation of the frequency converter. This causes the motor to be more noisy than in normal operation. In addition, large motors are exposed to bearing currents caused by the frequency converter.

If you operate the motor via a frequency converter, consider the following:

- In 2-, 4- and 6-pole motors, frame size 225 and up, isolate one of the motor bearings electrically to prevent damaging currents from passing through the motor bearings.
- In noise-sensitive applications, you can reduce the motor noise by fitting a dU/dt filter between the motor and the frequency converter. For particularly noise-sensitive applications, we recommend a sinusoidal filter.
- The length of the cable between motor and frequency converter affects the motor load. Therefore, check that the cable length meets the specifications laid down by the frequency converter supplier.
- For supply voltages between 500 and 690 V, fit a dU/dt filter to reduce voltage peaks, or use a motor with reinforced insulation.
- For supply voltages of 690 V, use a motor with reinforced insulation, and fit a dU/dt filter.

Grundfos CUE

Pumps connected to Grundfos CUE external frequency converters



TM1040611

Grundfos CUE frequency converters

Grundfos CUE is a complete range of wall-mounted frequency converters for pump control in a wide range of applications.

Grundfos CUE provides a variety of benefits to the end-user, such as:

- Grundfos E-pump functionality and user interface
- application- and pump family-related functions
- increased comfort compared to fixed-speed pump solutions
- simple installation and commissioning compared to standard frequency converters
- speed control of pumps up to 250 kW.

Intuitive startup guide

The startup guide enables easy installation and commissioning as well as plug-and-pump convenience. Few settings need to be made by the installer as the rest is done automatically or preset from the factory.

Smart user interface



Grundfos CUE user interface

Grundfos CUE features a unique user-friendly operating panel with graphic display and easy-to-use buttons.

Controlling the selected parameter

Grundfos CUE has a built-in PI controller offering closed-loop control of these parameters:

- constant differential pressure
- proportional pressure
- constant temperature
- constant flow rate.

Wide product range

The CUE product range is quite comprehensive, covering five different voltage ranges, enclosure classes IP20/21 (NEMA 1) and IP54/55 (NEMA 12), and a wide range of output powers.

The table below provides a general overview.

Input voltage [V]	Output voltage [V]	Motor [kW]
1 x 200-240	3 x 200-240	1.1 - 7.5
3 x 200-240	3 x 200-240	0.75 - 45
3 x 380-500	3 x 380-500	0.55 - 250
3 x 525-600	3 x 525-600	0.75 - 7.5
3 x 525-690	3 x 525-690	11-250

External communication

Grundfos CUE can communicate by means of LON, PROFIBUS, Modbus or BACnet via Grundfos CIU.

E-solution range

IE5

NBGE, NKGE pumps with a motor with an integrated frequency converter

TM043283



TM081605



TM084934

The MGE motor is a totally enclosed, fan-cooled, frequency-controlled motor with dimensions according to IEC and DIN standards. Electrical tolerances are to IEC 60034.

Motor protection

The motor requires no external motor protection. MGE motors incorporate thermal protection against steady overload and stalled condition (IEC 34-11: TP 211).

Benefits

Grundfos MGE motors provide a variety of benefits to the end-user, such as:

- Grundfos E-pump functionality and user interface
- a perfect match between pump and frequency drive
- application- and pump family-related functions
- increased comfort compared to fixed-speed pump solutions
- simple installation and commissioning compared to standard frequency converters.

Smart user interface



TM081606

Grundfos MGE motors feature a user-friendly operating panel with easy-to-use buttons.

Controlling the selected parameter

Grundfos MGE has a built-in PI controller offering closed-loop control of these parameters:

- constant differential pressure
- proportional pressure
- constant temperature
- constant flow rate.

External communication

Grundfos MGE can communicate by means of LON, PROFIBUS, Modbus or BACnet as described in section Communication with E-pumps.

Related information

[Communication with E-pumps](#)

Optional motors

The Grundfos standard range of motors covers a wide variety of application requirements. However, for special applications or operating conditions, custom-built motor solutions can be provided.

For special applications or operating conditions, Grundfos offers custom-built motors such as:

- ATEX-approved motors
- MG motors with anti-condensation heating unit
- motors with thermal protection.

IE4 IE5

NBGE, NKGE pumps combined with a Grundfos CUE and Siemens IE4 motor



TM081604



TM081608

Benefits

Grundfos CUE functionality:

- a perfect match between pump and frequency drive
- increased comfort and reduced power consumption compared to fixed-speed pump solution
- simple installation and commissioning compared to external mounted frequency drive
- space saving.

E-solution range

Pole	IE class	P2 [kW]															
		0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45
	IE4 ²⁴⁾	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•
2	IE5 ²⁵⁾	-	-	•	•	•	•	•	•	•	•	•	-	-	-	-	-
	IE5 ²⁶⁾	-	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•
	IE4 ²⁴⁾	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•
4	IE5 ²⁵⁾	•	•	•	•	•	•	•	•	•	•	•	•	-	-	-	-
	IE5 ²⁶⁾	-	-	-	-	-	-	-	-	-	•	•	•	•	•	•	•

²⁴⁾ Siemens motor with integrated CUE

²⁵⁾ MGE Motor

²⁶⁾ Nidec motor with integrated CUE

7. Operating conditions

Pump location

The pump is designed for installation in a non-aggressive and non-explosive atmosphere.

The relative air humidity must not exceed 95 %.

Ambient temperature and installation altitude

The ambient temperature and the installation altitude are important factors for the motor life, as they affect the life of the bearings and the insulation system.

The installation altitude is the height of the installation site above sea level.

If the ambient temperature exceeds the recommended maximum ambient temperature or maximum altitude above sea level, see figure Maximum motor output in relation to ambient temperature and altitude, the motor must not be fully loaded due to the low density and consequently low cooling effect of the air. In such cases, it may be necessary to use a motor with a higher output.

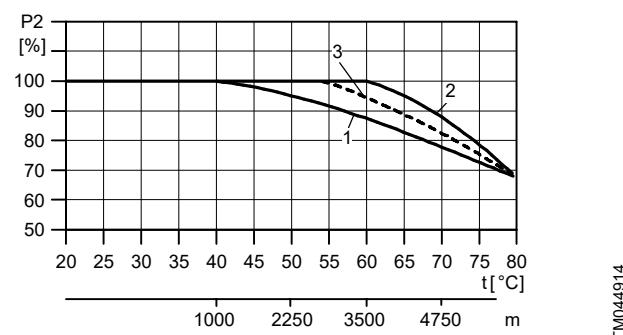
Pump with standard motor

Ambient temperature

Motor make	Motor P2	Permissible ambient temperature
MG	0.25 - 0.55 kW	-20 to +40 °C
	0.75 - 22 kW	-20 to +60 °C
Siemens	0.75 - 462 kW	-20 to +55 °C
MMG	0.75 - 450 kW	-20 to +60 °C

Maximum motor output in relation to ambient temperature and altitude

Motor make	Motor P2	Derating curve
MG	0.25 - 0.55 kW	curve 1
	0.75 - 22 kW	curve 2
Siemens	0.75 - 462 kW	curve 3
MMG	0.75 - 450 kW	curve 2



Maximum motor output in relation to ambient temperature and altitude

Example with a pump with a 1.1 kW IE3 MG motor:

If the pump is installed 4750 m above sea level, the motor must not be loaded more than 88 % of rated output. At an ambient temperature of 75 °C, the motor must not be loaded more than 78 % of rated output. If the pump is installed 4750 m above sea level at an ambient temperature of 75 °C, the motor must not be loaded more than 88 % x 78 % equal to 68.6 % of the rated output.

Pump with Grundfos MGE motor

Ambient temperature

Motor make	Motor P2	Permissible ambient temperature
Grundfos MGE	1.1 - 11 kW, 2-pole	-20 to +50 °C
	15-22 kW, 2-pole	-20 to +40 °C
	0.55 - 7.5 kW, 4-pole	-20 to +50 °C
	11 - 18.5 kW, 4-pole	-20 to +40 °C

The motor can operate with the rated power output, P2, at 50 °C, but continuous operation at higher temperatures reduces the expected product life. If the motor is to operate at ambient temperatures between 50 and 60 °C, select an oversize motor.

Contact Grundfos for further information.

Installation altitude

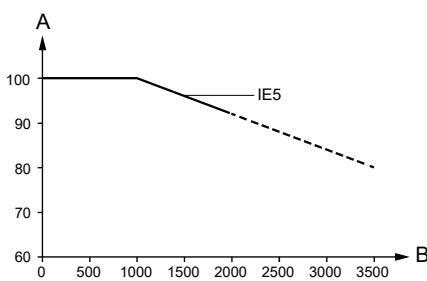
Motors installed up to 1000 metres above sea level can be loaded 100 %.

Motors installed more than 1000 metres above sea level must not be fully loaded due to the low density and consequent low cooling effect of the air.

Installation altitude is the height above sea level of the installation site.

Motors installed up to 1000 m above sea level can be loaded 100 %.

The motors can be installed up to 3500 m above sea level.

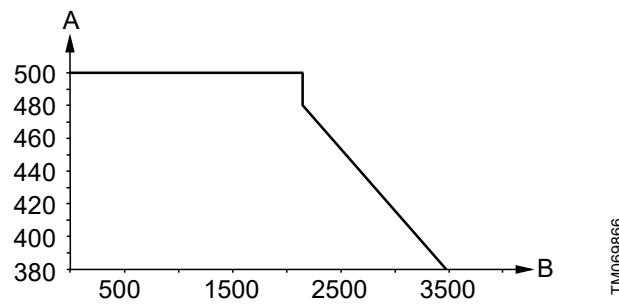


TM055243

Motor output power in relation to altitude

Pos.	Description
A	P2 [%]
B	Altitude [m]

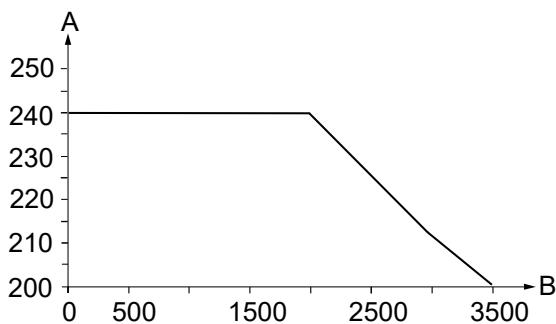
In order to maintain the galvanic isolation and ensure correct clearance according to EN 60664-1:2007, you must adapt the supply voltage to the altitude:



TM069866

Supply voltage for three-phase motor in relation to altitude

Pos.	Description
A	Supply voltage [V]
B	Altitude [m]



TM069867

Supply voltage for single-phase motor in relation to altitude

Pos.	Description
A	Supply voltage [V]
B	Altitude [m]

Note:

If the motor is to operate at ambient temperatures between 50 and 60 °C, select an oversized motor. Contact Grundfos.

E-pump with Siemens motor with integrated CUE**Ambient temperature**

Siemens motor with integrated CUE -10 to +50 °C

Installation altitude

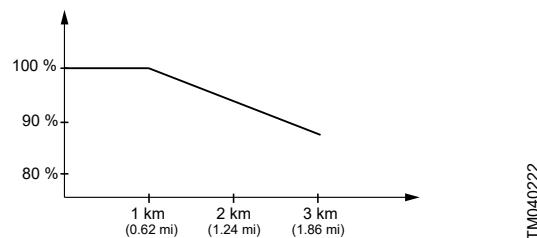
Derating must be taken into account when using CUE in these situations:

- low air pressure (heights)
- low speeds
- installations with long motor cables
- cables with a large cross-section
- high ambient temperature.

The required action is described in the next sections.

Low air pressure

At low air pressure, the cooling capability of air is reduced. At altitudes above 1000 m (3280 ft), the maximum output current should be derated in accordance with the diagram in the figure below.



Derating of output current at low air pressure

At altitudes above 2000 m (6561 ft), the PELV requirements cannot be met.

PELV = Protective Extra Low Voltage.

An alternative is to lower the ambient temperature at high altitudes and thereby ensure 100 % output current at high altitudes.

Example

At an altitude of 2000 m (6561 ft), the output current 24.0 A of the selected CUE must be derated to 92 % according to figure Derating of output current at low air pressure. This is equal to 22.1 A and lower than the maximum motor current 23.6 A. The selection is not valid.

Data of the new selected CUE:

Max. output current:	32.0 A
Typical shaft power:	15.0 kW (20 hp)
Product number (IP20):	96754695

Calculation of derated current at an altitude of 2000 m (6561 ft):

$$\text{Maximum output current} = 32.0 \times 0.92 = 29.4 \text{ A.}$$

This is higher than the maximum motor current 23.6 A.

The new selection is valid.

High ambient temperature

If the output current is reduced to 80 % of the nominal output current of the CUE in question, the ambient temperature may be 5 °C (41 °F) higher.

The other possibility is to use a unit one size bigger. For higher temperature increases, bigger units are required. The efficiency of the CUE will, however, be reduced at higher temperatures.

If the CUE gets too hot, it will reduce the switching frequency.

Note that the nominal temperature rating depends on the enclosure type.

The maximum ambient temperature of the different enclosures can be found in section Technical data.

Flow rates

Minimum flow rate

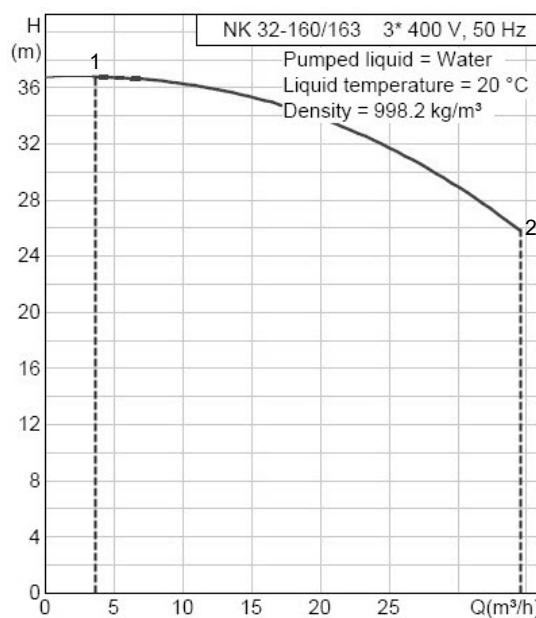
The pump must not run against a closed outlet valve as this causes an increase in temperature or formation of steam in the pump. This may cause shaft damage, impeller erosion, short life of bearings, damage to stuffing boxes or mechanical shaft seals due to stress or vibration.

The continuous flow rate must be at least 10 % of the maximum flow rate.

Maximum flow rate

The maximum flow rate must not be exceeded as otherwise there is a risk of for instance cavitation and overload.

The maximum flow rate can be read either from the performance curve pages or from a curve on a specific pump when selecting it in Grundfos Product Center.



Example from Grundfos Product Center showing minimum and maximum flow rate

Pos.	Description
1	Minimum flow rate
2	Maximum flow rate

Sound pressure level

Data in this table apply for pump including motor.

Motor [kW]	Maximum sound pressure level [dB(A)] - ISO 3743			
	Three-phase motors			
	2-pole	4-pole	6-pole	8-pole
0.25	56	41	-	-
0.37	56	45	-	-
0.55	57	42	40	-
0.75	56	42	43	-
1.1	59	50	43	-
1.5	58	50	47	-
2.2	60	52	52	-
3	67	58	63	-
4	69	58	63	-
5.5	68	64	63	-
7.5	68	64	67	-
11	70	65	67	67
15	70	65	57	57
18.5	70	57	57	57
22	67	57	57	-
30	67	57	57	-
37	67	57	57	-
45	67	57	58	-
55	71	57	58	-
75	73	65	59	-
90	73	65	59	-
110	73	65	60	-
132	73	65	60	-
160	76	65	63	-
200	76	65	67	-
250	78	73	68	-
315	82	74	71	-
355	77	75	71	-
400	-	75	-	-

Liquid temperatures

Liquids with temperatures ranging from -25 to +140 °C are covered in this data booklet.

For liquids from -40 to +220 °C, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858", or contact Grundfos. In that data booklet, you will also find information about the seals being used for other liquids than water and glycols, i.e. oils, chemicals and silicone oil. Further seal types are also described to support more application types and pumped liquids.


The maximum liquid temperature is stamped on the nameplate.

Note that the maximum liquid temperature limits stated by Grundfos may be overruled by local regulations and various laws.

Operating range of mechanical shaft seals

The temperature range applies to water and coolants.

Seals with a temperature range of 0 °C and up are mainly used for pumping water, while seals for temperatures below 0 °C are mainly intended for coolants.

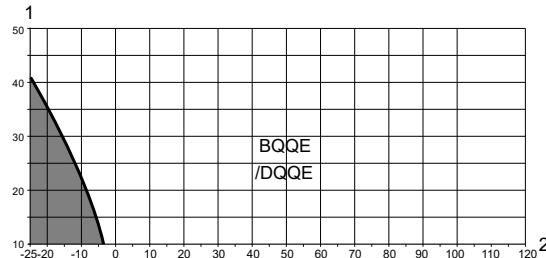


Shaft seal diameter [mm]	NBG, NKG		28, 38	48	55	60		
d5 [mm]	NKG		24, 32	42	48	60		
Shaft seal type	Code	Temperature range	Maximum pressure [bar]				Seal faces	Rubber
Bellows seal, type B, unbalanced	BAQE	0-120 °C	16	16	16	16	AQ ₁	EPDM
	BBQE ^{27), 28)}	0-120 °C	16	16	16	16	BQ ₁	EPDM
	BBQV	0-90 °C	16	16	16	16	BQ ₁	FKM
	BQQE ²⁷⁾	-25 to +120 °C	16	16	16	16	Q ₇ Q ₇	EPDM
	BQQV	-10 to +90 °C	16	16	16	16	Q ₇ Q ₇	FKM
O-ring seal, type A, unbalanced	AQAE	0-120 °C	16	16	16	16	Q ₁ A	EPDM
	AQAV	0-90 °C	16	16	16	16	Q ₁ A	FKM
	AQQE	-25 to +90 °C	16	16	16	16	Q ₁ Q ₁	EPDM
	AQQV	-10 to +90 °C	16	16	16	16	Q ₁ Q ₁	FKM
	AQQX	-15 to +90 °C	16	16	16	16	Q ₁ Q ₁	HNBR
	AQQK	0-90 °C	16	16	16	16	Q ₁ Q ₁	FFKM
O-ring seal, type D, balanced	DAQF	0-140 °C	25	25	25	25	AQ ₁	FXM
	DQQE	-20 to +120 °C	25	25	25	25	Q ₆ Q ₆	EPDM
	DQQV	-10 to +90 °C	25	25	25	25	Q ₆ Q ₆	FKM
	DQQX	-15 to +120 °C	25	25	25	25	Q ₆ Q ₆	HNBR
	DQQK	0-120 °C	25	25	25	25	Q ₆ Q ₆	FFKM

27) Shaft seals with drinking water approvals.

28) For ultra pure water applications having a conductivity lower than 2 microSiemens, contact Grundfos for a special shaft seal version.

Recommended shaft seal for water-glycol mixture



TM061032

Operating range of EPDM shaft seals

Pos.	Description
1	Glycol content [%]
2	Temperature [°C]

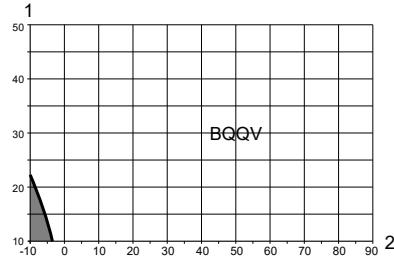
Carbon-silicon carbide (xAQx), (xBQx)

Mechanical shaft seals with carbon-silicon carbide seal faces have a wide range of applications and are especially suitable if there is risk of dry running and/or if the temperature is high. These mechanical shaft seals are not suitable for liquids containing abrasive particles as the carbon parts will be worn. At temperatures below 0 °C, corrosion inhibitors containing abrasive particles are usually added to the pumped liquid, and these seals will thus not be suitable.

Note: The antimony impregnation (A) is not approved for potable water applications.

Silicon carbide-silicon carbide (xQQx)

Mechanical shaft seals with silicon carbide-silicon carbide seal faces also have a very wide range of applications. These seals are very resistant to abrasive particles and well suited at liquid temperatures up to 90 °C for Q₁ types, and up to 120 °C for Q₆ types. At higher temperatures, the reduced lubricating properties of the pumped liquid may cause noise problems and limit the life of the seal faces.



TM061034

Operating range of FKM shaft seals

Pos.	Description
1	Glycol content [%]
2	Temperature [°C]

EPDM (xxxE)

Mechanical shaft seals with EPDM (xxxE) rubber are primarily suitable for water.

If the water contains oil or if chemicals or other liquids than water are pumped, you may have to replace the rubber parts of the mechanical shaft seal.

FKM (xxxV)

Mechanical shaft seals with FKM (xxxV) rubber have excellent resistance against oil and a number of chemicals.

Operating range of stuffing boxes

Stuffing box type	Code for stuffing box	Code for packing material ²⁹⁾	O-rings in pump	Temperature range ³⁰⁾ [°C]	Max. p [bar]	Pumps	
						NBG	NKG
Internal barrier liquid	SNEA	B	EPDM	-30 to +140	16	-	•
	SNEB	T	EPDM	-30 to +140	16	-	•
	SNEC	B	FKM	-30 to +90	16	-	•
	SNED	T	FKM	-30 to +90	16	-	•
Without barrier liquid	SNOA	B	EPDM	-30 to +140	16	-	•
	SNOB	T	EPDM	-30 to +140	16	-	•
	SNOC	B	FKM	-30 to +90	16	-	•
	SNOD	T	FKM	-30 to +90	16	-	•
External barrier liquid	SNFA	B	EPDM	-30 to +140	16	-	•
	SNFB	T	EPDM	-30 to +140	16	-	•
	SNFC	B	FKM	-30 to +90	16	-	•
	SNFD	T	FKM	-30 to +90	16	-	•

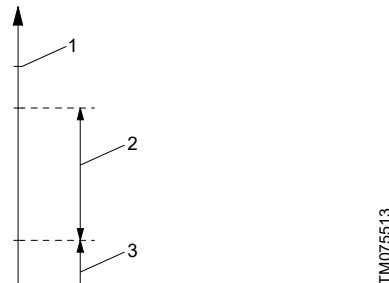
29) B: Buraflon®, PTFE-impregnated fibre packing rings

T: Thermoflon®, graphite-PTFE compound packing rings

30) The temperature range applies to water and coolants.

Pressures in the pump

Maximum operating pressure



Pressures in the pump

Pos.	Description
1	Maximum operating pressure (pressure above atmospheric pressure)
2	Pump pressure
3	Inlet pressure

The inlet pressure + pump pressure must be lower than the maximum operating pressure (p) stated on the pump nameplate. The maximum operating pressure can be checked by closing the outlet valve briefly for maximum 30 seconds.

Minimum inlet pressure

The minimum inlet pressure must be according to the NPSH curve + correction for vapour pressure. We do, however, recommend that you calculate the inlet pressure in these cases:

- The liquid temperature is high.
- The flow rate is considerably higher than the pump's rated flow rate.

- The pump is operating in an open system with suction lift.
- The liquid is sucked through long pipes.
- The inlet conditions are poor.
- The operating pressure is low.

Maximum inlet pressure

The inlet pressure + pump pressure must be lower than the maximum operating pressure (p) stated on the pump nameplate. The maximum operating pressure can be checked by closing the outlet valve briefly for maximum 30 seconds.


Suction lift in open systems

Calculation of suction lift in open systems (water)

The suction lift "H" in metres head required during operation to avoid cavitation in the pump can be calculated by means of the following formula:

$$H = p_b \times 10.2 - \text{NPSH} - H_f - H_v$$

H	Suction lift
p_b	Barometric pressure in bar. The barometric pressure can be taken as equal to 1 bar. In closed systems, p _b indicates system pressure in bar.
NPSH	Net Positive Suction Head in metres head. The NPSH value can be read from the NPSH curve at the highest flow rate the pump will be delivering.
H_f	The maximum flow rate must not exceed the maximum flow rate shown on the QH curve. The NPSH curve and QH curve for the individual pump can be found in Grundfos Product Center and in the relevant data booklet.
H_v	Friction loss in the inlet pipe in metres head at the highest flow rate the pump will be delivering.
H_v	Vapour pressure in metres head. See figure below.



TM003037

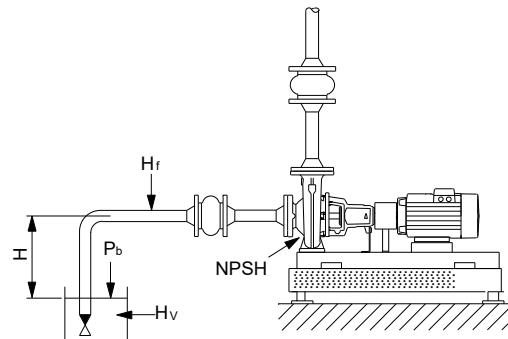
Relation between liquid temperature and vapour pressure

Positive H value

Example:

Liquid temperature:	20 °C
Pump type:	NKG 80-50-200/219, 2-pole, 50 Hz
Flow rate:	70 m ³ /h
p _b :	1 bar
NPSH:	2.8 m head
H _f :	3.0 m head
H _v :	0.24 m head
$H = p_b \times 10.2 - \text{NPSH} - H_f - H_v$ [m head]	
$H = 1 \times 10.2 - 2.8 - 3.0 - 0.24 = 4.16$ m head	

If the calculated value of H is positive, the pump can operate with a maximum suction lift of H metres.



TM081003

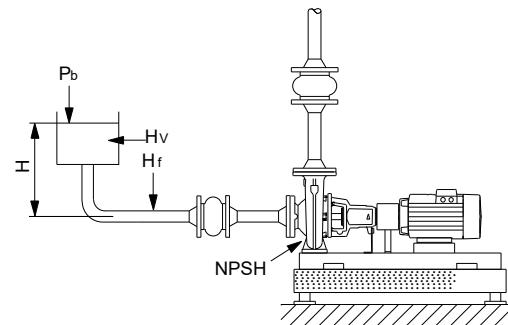
Suction lift with positive H

Negative H value

Example:

Liquid temperature:	90 °C
Pump type:	NKG 80-50-200/219, 2-pole, 50 Hz
Flow rate:	70 m ³ /h
p _b :	1 bar
NPSH:	2.8 m head
H _f :	3.0 m head
H _v :	7.2 m head
$H = p_b \times 10.2 - \text{NPSH} - H_f - H_v$ [m head]	
$H = 1 \times 10.2 - 2.8 - 3.0 - 7.2 = -2.8$ m head	

If the calculated value of H is negative, a minimum suction head of H metres is required. The calculated H must be present during operation.



TM081004

Suction lift with negative H

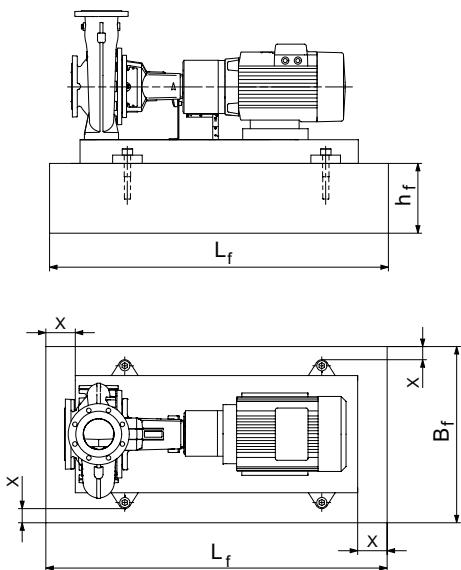
8. Mechanical installation

Foundation and grouting

Foundation

We recommend that you install the pump on a plane and rigid concrete foundation which is heavy enough to provide permanent support for the entire pump. The foundation must be capable of absorbing any vibration, normal strain or shock. As a rule of thumb, the weight of the concrete foundation must be 1.5 times the weight of the pump.

The foundation must be 100 mm larger than the base frame on all four sides. See figure below.



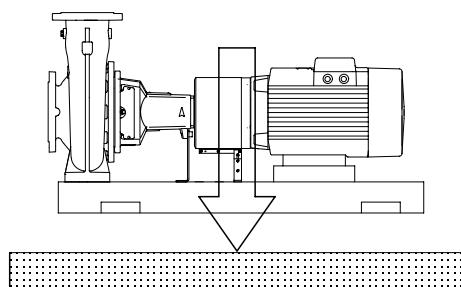
Foundation, X is equal to minimum 100 mm

The minimum height of the foundation (h_f) can then be calculated:

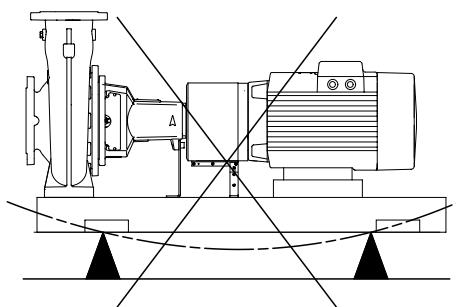
$$h_f = \frac{m_{\text{pump}} \times 1.5}{L_f \times B_f \times \delta_{\text{concrete}}}$$

The density (δ) of concrete is usually taken as 2200 kg/m³.

Place the pump on the foundation, and fasten it. The base frame must be supported under its entire area. See figure below.

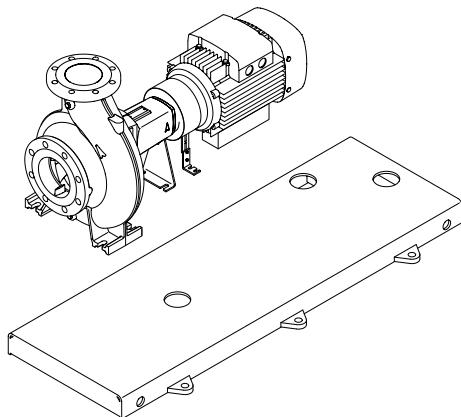


Correct foundation



Incorrect foundation

TM034324



Base frame prepared for grouting

TM034587


Grouting

Grouting compensates for uneven foundation, distributes the weight of the unit, dampens vibrations and prevents shifting.

All NKG pumps can be delivered with base frames prepared for grouting as an option. NBG pumps with base frames are always prepared for grouting.

For 2-pole NKG and NBG pumps with motors as from 55 kW, grouting of the base frame is mandatory in order to prevent vibration energy from the rotating motor and the liquid flow.

Use an approved, non-shrinking grout. If in doubt, contact your grout supplier.



Reinforcing steel bars embedded in foundation

TM040490

Use reinforcing steel bars embedded in the foundation to ensure proper grouting.

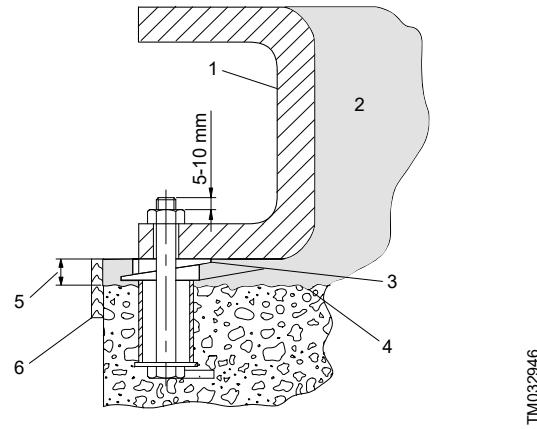
Build a strong formwork around the foundation.

Soak the top of the concrete foundation thoroughly, and remove surface water.

Fill the formwork with grout up to the base frame top level. See figure below. Allow the grout to dry thoroughly before attaching pipes to the pump. 24 hours is sufficient time with approved grouting procedure.

When the grout has thoroughly hardened, check the anchor bolt nuts and tighten, if necessary.

Approximately two weeks after the grout has been poured, or when the grout has thoroughly dried, apply an oil-based paint to the exposed edges of the grout to prevent air and moisture from getting into contact with the grout.



Sectional view of foundation with anchor bolt, grouting and base frame

Pos.	Description
1	Base frame
2	Grout
3	Levelling wedges or shims left in place
4	Top of foundation (rough)
5	19 to 32 mm grout
6	Formwork

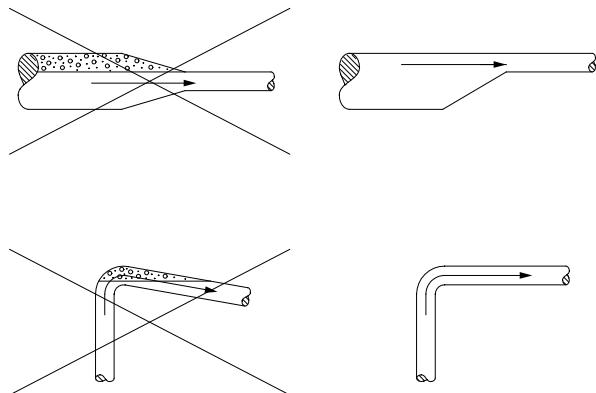
Pipes

Pipes

When installing the pipes, make sure that the pump housing is not stressed by the pipes.

The inlet and outlet pipes must be of an adequate size, taking the pump inlet pressure into account.

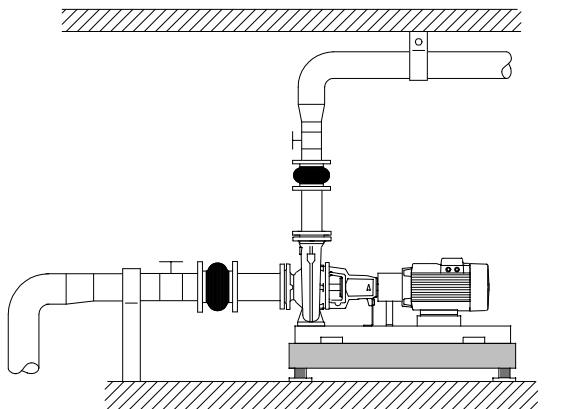
Install the pipes so that air locks are avoided, especially on the inlet side of the pump. See figure below.



Pipelines

Fit isolating valves on either side of the pump to avoid having to drain the system if the pump needs to be cleaned or repaired.

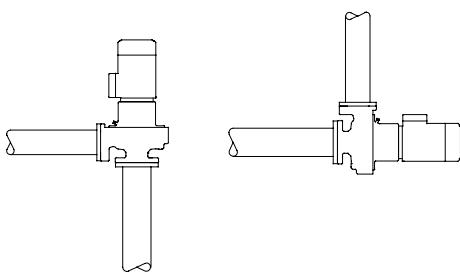
Make sure that the pipes are adequately supported as close to the pump as possible, both on the inlet and the outlet side. The counterflanges must lie true against the pump flanges without being stressed as this would cause damage to the pump.



Pipeline mounting

Direct mounting in pipes

NBG pumps of mounting design A are suitable for direct mounting in supported pipes.



TM05337

Direct mounting in pipes

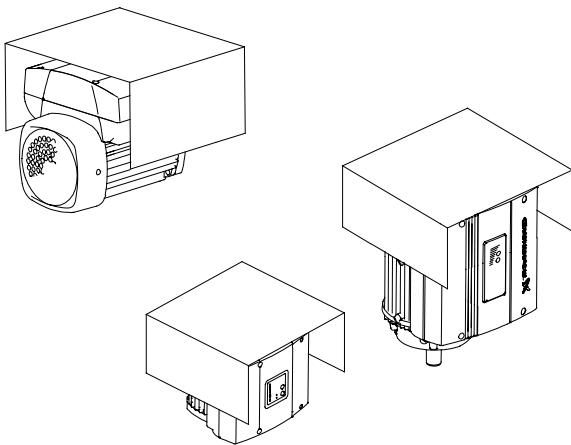
This type of installation does not allow the use of expansion joints.

Note: To ensure quiet operation, the pipes must be suspended from suitable pipe hangers.

Condensation cover

When installing the pumps outdoors, provide the motor with a suitable cover to protect the pump and motor against the direct effects of the elements.

When mounting the condensation cover on top of the motor, make sure to leave enough space for the air to cool the motor.



TM079060

Motors with condensation cover

Elimination of noise and vibrations

In order to achieve optimum operation and minimum noise and vibration, consider vibration dampening of the pump. Generally, always consider this for pumps with motors above 15 hp (11 kW). Smaller motor sizes, however, may also cause undesirable noise and vibration.

Noise and vibration are generated by the revolutions of the motor and pump and by the flow in pipes and fittings. The effect on the environment is subjective and depends on correct installation and the state of the remaining system.

Elimination of noise and vibrations is best achieved by means of vibration dampers and expansion joints. See figure Pipeline mounting.

Vibration dampers

To prevent the transmission of vibrations to buildings, we recommend that you isolate the pump foundation from building parts by means of vibration dampers.

The selection of the right vibration damper requires the following data:

- forces transmitted through the damper
- motor speed considering speed control, if any
- required dampening in %; the suggested value is 70 %.

The selection of vibration damper differs from installation to installation. In certain cases, a wrong damper may increase the vibration level. Vibration dampers must therefore be sized by the supplier of the vibration dampers.

If you install the pump on a foundation with vibration dampers, always fit expansion joints on the pump flanges. This is important to prevent the pump from "hanging" in the flanges.

Expansion joints

Install expansion joints for these purposes:

- to absorb expansions or contractions in the pipes caused by changing liquid temperature
- to reduce mechanical strains in connection with pressure surges in the pipes
- to isolate mechanical structure-borne noise in the pipes; this applies only to rubber bellows expansion joints.

Note: Do not install expansion joints to make up for inaccuracies in the pipes, such as centre displacement or misalignment of flanges.

Fit the expansion joints at a minimum distance of 1 to 1 1/2 pipe diameters (DN) away from the pump on the inlet and the outlet side. This prevents turbulence in the joints, thus ensuring optimum suction conditions and minimum pressure loss on the outlet side. At flow velocities greater than 5 m/s, we recommend that you fit larger expansion joints matching the pipes.

The illustration below shows examples of rubber bellows expansion joints with or without limiting rods.



TM024979




TM024981

Rubber bellows expansion joints with and without limiting rods

Expansion joints with limiting rods can be used to reduce the effects of the expansion or contraction forces on the pipes. We always recommend expansion joints with limiting rods for flanges larger than DN 100.

Anchor the pipes in such a way that they do not stress the expansion joints and the pump. Follow the supplier's instructions and pass them on to advisers or pipe installers.

The illustration below shows an example of a metal bellows expansion joint with limiting rods.



TM024980

Metal bellows expansion joint with limiting rods

Due to the risk of rupture of the rubber bellows, metal bellows expansion joints may be preferred at temperatures above 100 °C combined with high pressure.

Related information

[Pipes](#)

Alignment

Alignment applies only to NKG, NKGE pumps.

In a complete pump unit assembled and supplied from factory, the coupling halves have been accurately aligned. Alignment is made by inserting shims under the pump and motor mounting surfaces as required.

The pump-motor alignment may be affected during transport. Always check alignment after the pump has been installed.

If misalignment has occurred due to radial or angular shifting, realign by inserting or removing shims under the feet of the pump or the motor.

Take care to align carefully, as this increases the lives of the coupling, bearings and shaft seal considerably.

Note: Check the final alignment when the pump has obtained its operating temperature under normal operating conditions.

9. Speed-controlled pumps

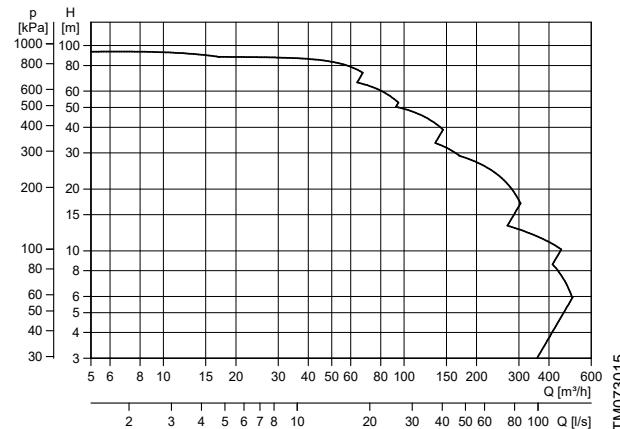
NBG and NKG pumps are available with MGE motors with integrated speed control. These pumps are also called E-pumps and the pump designation is NBGE and NKGE.

E-pumps are suitable for applications where the pressure, temperature, flow rate or another parameter is to be controlled on the basis of signals from a sensor at some point in the system.



NBGE, NKGE pumps without sensors from the factory

E-pump type	4000 RPM	2000/2200 RPM
NBGE, NKGE	1.1 - 22 kW	0.55 - 22 kW

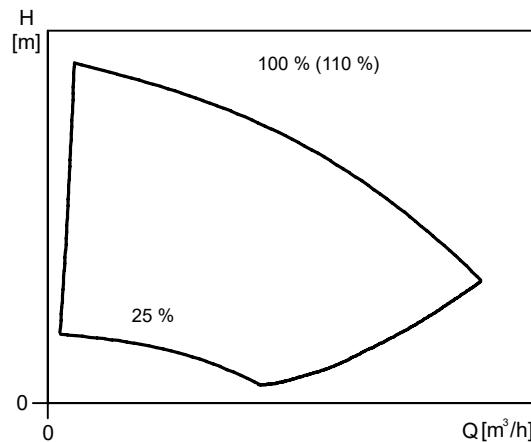


E-pumps performance range

Pumps larger than 22 kW, 2-pole and 22 kW, 4-pole, and 6- and 8-pole can be connected to an external frequency converter.

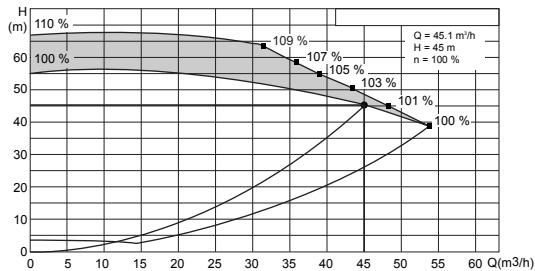
The integrated speed control enables the pump to operate at any duty point between 25 % and 100 % speed. The performance adapts to current conditions and keeps the energy consumption at a minimum.

The 100 % curve corresponds to the curve of a pump with a mains-operated motor.



Duty range of E-pumps

As a part of the duty range as shown in the figure below, the pumps with MGE motor can operate at speeds up to 110 %.



Example on extended performance range up to 110 % as a part of the operation range

The extended range is achieved by means of optimised software which utilises the MGE motor to its maximum in an optimum way. As a result, the E-pump is able to deliver higher head and flow rate with the same motor size. The curve sheets in this data booklet only show the nominal 100 % Q-H curve of pumps with standard motors. You may find information on the extended performance range in Grundfos Product Center.

TM059472

Why select an E-pump

The main reasons for choosing the Grundfos E-motor instead of a conventional standard motor and separate frequency converter are the following:

1. Unique product

- The motor and frequency converter are perfectly matched. The customer will not experience the same problems which may occur when using a standard motor with separate frequency converter, such as noise due to switch frequency.
- Predefined intelligent control modes, such as constant pressure and constant level. These predefined control modes make it easy to fit the pump into any application.

2. Full application adaptation

- Functionality is matched to the specific pump application.
- Grundfos makes a customised configuration file to suit the customer's requirements.
- Full adaptation to any control management system by means of various interfaces.

3. Simple and easy installation

- Reduced installation and wiring costs compared to standard frequency converters.
- No further programming required. An E-motor is a plug-and-pump product.
- On-site customisation of the software configuration file to adapt to changed operating parameters.
- Control, monitor, install, commission, and email reports all from your smart device via the Grundfos GO technology.

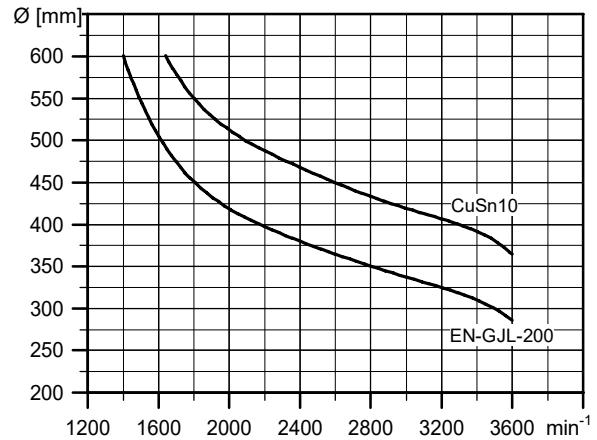
4. One supplier

- Complete product is supplied by one sole supplier. This gives the customer security as only one supplier needs to be contacted in case of problems or complaints.

For more information on the E-pumps for NBGE and NKG and detailed functionalities, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

Maximum speed of the impeller

The table below shows the relationship between pump speed and impeller material and size.



TM034109

Maximum permissible speed

For stainless steel impellers (1.4408/1.4517), the limit is 3600 min⁻¹ regardless of impeller size.

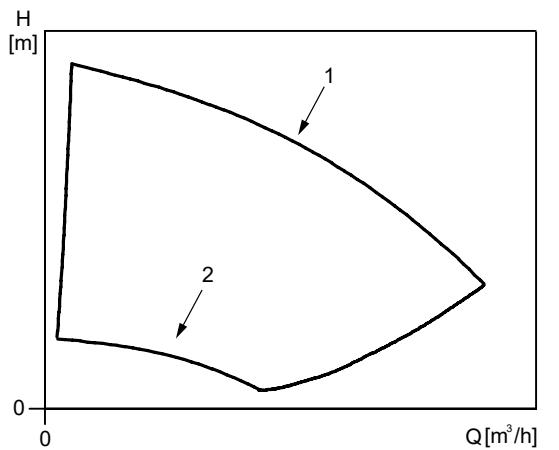
Affinity equations

Normally, NBGE, NKG pumps are used in applications characterised by a variable flow. Consequently, it is not possible to select a pump that is constantly operating at its optimum efficiency.

To achieve optimum operating economy, select the pump on the basis of the following criteria:

- The maximum duty point required must be as close as possible to the QH curve of the pump.
- The flow rate at the duty point required must be close to the optimum efficiency (η) for most operating hours

Between the minimum and maximum performance curve, NBGE, NKG pumps have an infinite number of performance curves each representing a specific speed. It may therefore not be possible to select a duty point close to the maximum curve.



TM014916

Minimum and maximum performance curves

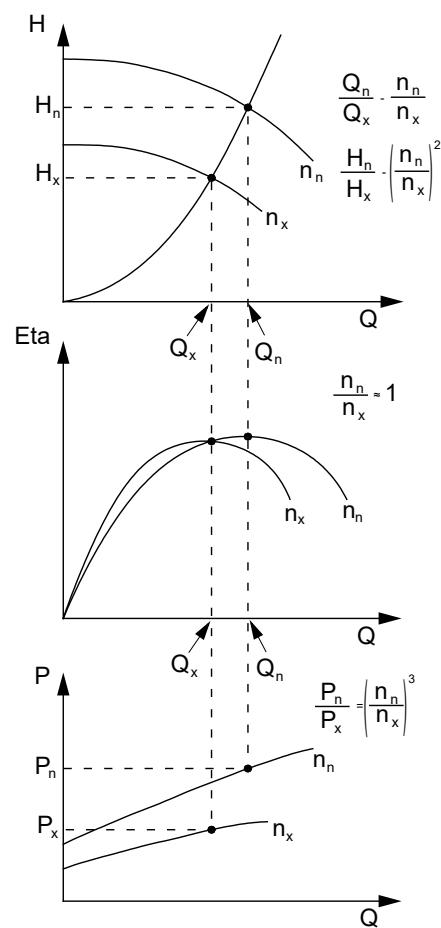
Pos.	Description
1	Maximum curve
2	Minimum curve

In situations where it is not possible to select a duty point close to the maximum curve, use the affinity equations below. The head (H), the flow rate (Q) and the input power (P) are the appropriate variables you need to be able to calculate the motor speed (n).

Note: The approximated formulas apply on condition that the system characteristic remains unchanged for n_n and n_x and that it is based on the formula $H = k \times Q^2$, where k is a constant.

The power equation implies that the pump efficiency is unchanged at the two speeds. In practice, this is not quite correct.

Finally, it is worth noting that the efficiencies of the frequency converter and the motor must be taken into account if a precise calculation of the power saving resulting from a reduction of the pump speed is wanted.



TM008720

Affinity equations

H_n	Rated head in m
H_x	Actual head in m
Q_n	Rated flow rate in m^3/h
Q_x	Actual flow rate in m^3/h
P_n	Rated input power in kW
P_x	Actual input power in kW
n_n	Rated motor speed in min^{-1}
n_x	Actual motor speed in min^{-1}
η_n	Rated efficiency in %
η_x	Actual efficiency in %

Grundfos Product Center

Grundfos Product Center are selection programs offered by Grundfos.

The two programs make it possible to calculate the specific duty point and energy consumption of an NBGE or NKGE pump.

When you enter the pump data, Grundfos Product Center can calculate the exact duty point and energy consumption. For further information, see section Grundfos Product Center.

Related information

[24. Grundfos Product Center](#)

Communication with the E-solution

E-solution	
MGE	CUE
Operating panel on unit	x
Grundfos GO control	-
Central building management system	x

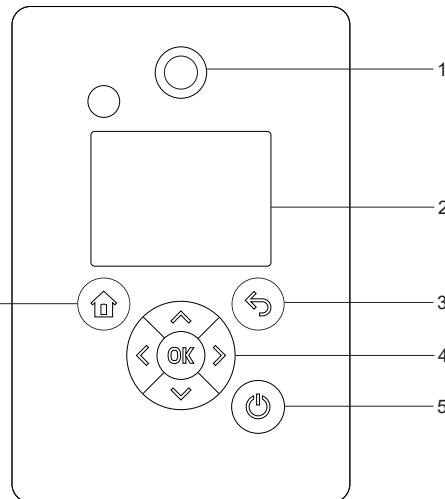
Pos. Symbol Description

- | | |
|---|---|
| 1 |  Grundfos Eye:
The indicator light shows the operating status of the product. |
| 2 | - Graphical colour display. |
| 3 |  Back:
Press the button to go one step back. |
| 4 |  Left/Right: Press the buttons to navigate between main menus, displays and digits. When you change the menu, the display shows the top display of the new menu.
Up/Down:
 Press the buttons to navigate between submenus or change the value settings.
 If you have disabled the possibility to make settings with the Enable/disable settings function, you can enable it again temporarily by pressing these buttons simultaneously for at least 5 seconds. |
| 5 |  OK:
Press the button to do as follows: <ul style="list-style-type: none"> • save changed values, reset alarms and expand the value field • enable communication with Grundfos GO and other products of the same type. When you try to establish radio communication between the product and Grundfos GO or another product, the green indicator light in Grundfos Eye flashes. In the controller display, a note states that a device wants to connect to the product. Press OK on the product operating panel to allow communication with Grundfos GO or Grundfos GO Link and other products of the same type. |
| 6 |  Start/Stop: Press the button to make the product ready for operation or to start and stop the product. Start: If you press the button when the product is stopped, the product starts if no other functions with higher priority have been enabled. Stop: If you press the button when the product is running, the product always stops. When you press the button, the stop icon appears at the bottom of the display.

Home: Press the button to go to the Home menu. |

Operating panel

Operating panel for 1.1 - 22 kW, 2-pole and 0.55 - 22 kW 4-pole motors



TM082874

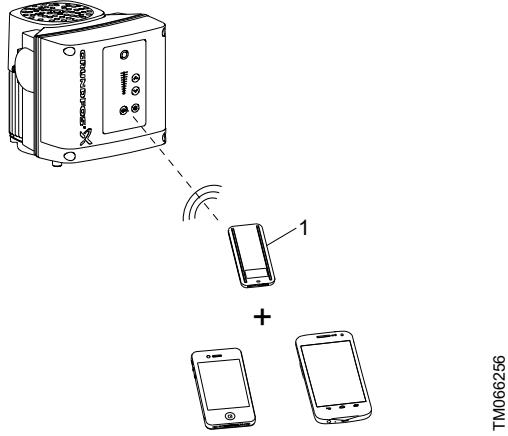
Grundfos GO

Grundfos GO, up to 11 kW 2-pole and 7.5 kW 4-pole

The pump is designed for wireless radio or infrared communication with Grundfos GO.

Grundfos GO enables setting of functions and gives access to status overviews, technical product information and actual operating parameters.

Grundfos GO offers the following mobile interface, MI.



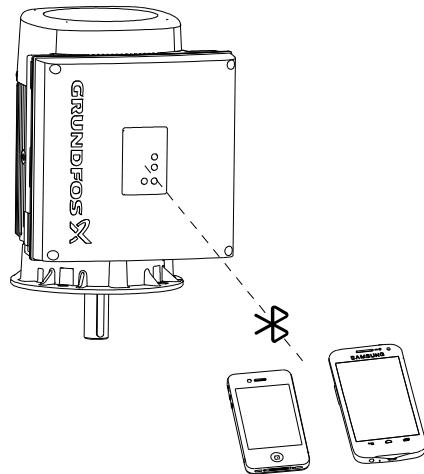
Grundfos GO communicating with the pump via radio or infrared connection, IR

Pos.	Description
	Grundfos MI 301:
1	Separate module enabling radio or infrared communication. You can use the module in conjunction with an Android or iOS-based smart device with Bluetooth connection.

Grundfos GO, from 15-22 kW 2-pole and 11-22 kW 4-pole

The product is designed for wireless communication with Grundfos GO using Bluetooth (BLE).

Grundfos GO enables you to set functions and gives you access to status overviews, technical product information and current operating parameters.



Communication

When Grundfos GO initiates communication with the pump, the indicator light in the middle of Grundfos Eye flashes green. See section Priority of settings.

Furthermore, on pumps fitted with an advanced control panel a text appears in the display saying that a wireless device is trying to establish connection. Press **OK** on the pump in order to establish connection with Grundfos GO or press **Home** to reject connection.

Establish communication using one of these communication types:

- radio communication
- infrared communication
- Bluetooth communication

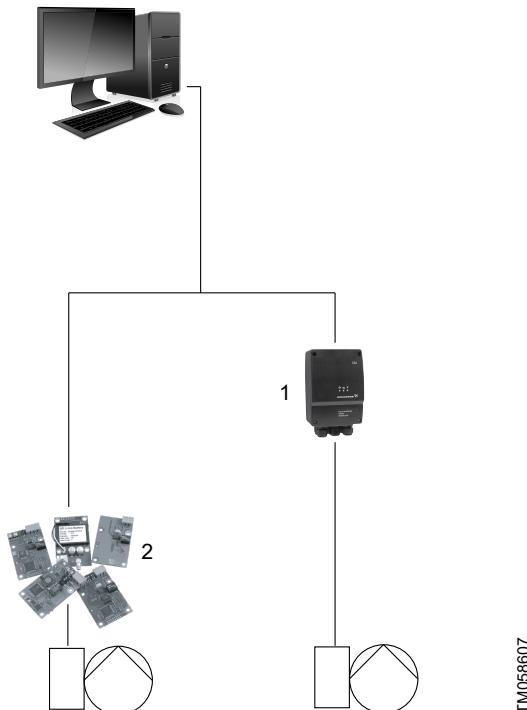
Communication with E-pumps

Communication with E-pumps is possible via a central building management system, remote control (Grundfos GO) or operating panel.

Central building management system

The operator can communicate with an E-pump at a distance by means of the CIU or CIM. Communication can take place via a central building management system allowing the operator to monitor and change control modes and setpoint settings.

The CIU unit can be used for all NKE pumps and CIM module can only be used for pumps with MGE motors. Both can be ordered as accessory. For ordering details, see section CIU communication interface units and CIM communication interface modules.



Structure of a central building management system

Pos.	Description
1	CIU 100: LonWorks
	CIU 150: PROFIBUS DP
	CIU 200: Modbus RTU
	CIU 250: GSM
	CIU 270: GRM
	CIU 300: BACnet MS/TP
	CIU 500: Modbus TCP
	CIU 500: PROFINET IO
	CIM 100: LONWorks
2	CIM 150: PROFIBUS DP
	CIM 200: Modbus RTU
	CIM 260: 3G/4G cellular
	CIM 280: GRM GiC 3G/4G
	CIM 300: BACnet MS/TP
	CIM 500: PROFINET
	CIM 500: Modbus TCP
	CIM 500: BACnet IP
	CIM 500: EtherNet/IP
	CIM 500: GRM IP

10. Pumps connected in parallel

Control of pumps connected in parallel

In some applications, parallel pump operation is required for one or more of the following reasons:

- One pump cannot achieve the required performance or flow rate.
- Standby capacity is required to ensure reliability of supply.
- Overall efficiency needs to be improved in case of big variations in the flow rate demand.

NB, NBE, NK, NKE pumps connected in parallel can be controlled by Control MPC.



TM04210.SH

Control MPC

Pumps connected to Control MPC

NBG, NBGE, NKG, NKGE pumps can be connected directly to Grundfos Control MPC.

Control MPC incorporates, among others, a CU 352 controller that can control up to six pumps.

By means of an external sensor, Control MPC can ensure optimum adaptation of the performance to the demand by closed-loop control of these parameters:

- proportional differential pressure
- constant differential pressure
- differential pressure, remote
- flow rate
- temperature.

CU 352 incorporates features such as those below:

Related information

[24. Grundfos Product Center](#)

Startup wizard

Correct installation and commissioning is a prerequisite for attaining optimum performance of the system and trouble-free operation year in and year out.

During commissioning of the system, a startup wizard is shown on the display of the CU 352. The wizard guides the operator through the various steps via a series of dialogue boxes to ensure that all settings are done in the correct sequence.

Application-optimised software

CU 352 incorporates application-optimised software which helps you set your system to the application in question. Furthermore, you can easily navigate through the menus of the controller. You do not need any training to be able to set and monitor the system.

Ethernet connection

CU 352 incorporates an Ethernet connection which makes it possible to get full and unlimited access to the setting and monitoring of the system via a remote PC.

Service port, GENI TTL

The service port of the CU 352 enables easy access to updating software and data logging in service situations.

External communication

Control MPC enables communication with other fieldbus protocols. In order to communicate with other fieldbus protocols, a GENibus module and a gateway is needed.

Control MPC can communicate with LON, PROFIBUS, Modbus or BACnet via Grundfos CIU.

Note: For further information about Control MPC, see the "Control MPC" data booklet. The data booklet is available in Grundfos Product Center on www.grundfos.com. For further information on Grundfos Product Center, see section Grundfos Product Center.

Related information

[24. Grundfos Product Center](#)

11. Selection of product

Key application data sheet

Our "Key application data sheet" can be used to gather the information typically needed in order to make the most suitable pump configuration.

Consider the following aspects when configuring a pump:

- the pumped liquid
- viscosity and density
- solids in the liquid
- operating temperatures and pressures
- customer-specific requirements.

These and other operating conditions listed in the data sheet are important for choosing the right pump material, shaft seal and shaft seal arrangement.

The data sheet can be seen as a check list and can be filled in by the customer alone or together with a Grundfos representative.

We recommend that you always fill in this data sheet as it saves a lot of time for the customer and for Grundfos.

The "Key application data sheet" can be found in Grundfos Product Center.

Search result

1

Literature▼	NB		<input type="button" value="SEARCH"/>
-------------	----	--	---------------------------------------

Input product number or a whole or partial product name

Documents

<input type="checkbox"/>	Title	Document Number	Literature language	Literature category	Product type	Date added	Version
► Brochures							
► Installation & operating instructions							
► Service							
▼ Data booklets							
<input type="checkbox"/>	Hydro Diesel-NB/NK (Fire system)	96635218	English	Data booklets	-	2/14/2012	
<input type="checkbox"/>	Hydro Syntex-NB/NK (Fire system)	96635217	English	Data booklets	-	10/14/2011	
<input type="checkbox"/>	Hydro UNI-NB/NK (Fire system)	96635219	English	Data booklets	-	8/14/2012	
<input type="checkbox"/>	NB, NBE, NK, NKE	96653947	English	Data booklets	-	11/6/2015	<input checked="" type="checkbox"/> Latest
<input type="checkbox"/>	NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE (Custom-built pumps)	97572305	English	Data booklets	-	2/17/2015	<input checked="" type="checkbox"/> Latest
2	<input checked="" type="checkbox"/> NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE (Key application data) (Data Sheet)	98150787	English	Data booklets	-	3/1/2012	

How to find the "Key application data sheet" in Grundfos Product Center

TM065000

83

Pump size

Select the pump size on the basis of these conditions:

- required flow rate and pressure at the draw-off point
- pressure loss as a result of height differences
- friction loss in the pipes. It may be necessary to account for pressure loss in connection with long pipes, bends or valves, etc.
- optimum efficiency at the estimated duty point.

Efficiency

If you expect the pump to always operate at the same duty point, select a pump which operates at a duty point corresponding to the optimum efficiency of the pump.

In case of controlled operation or varying consumption, select a pump whose optimum efficiency falls within the duty range covering the greater part of the duty time.

Material

Select the material variant on the basis of the liquid to be pumped. See section Pumped liquids.

Related information

[General recommendations](#)

Motor size

Select the motor size on the basis of the power required to achieve the duty point of the chosen pump. This information can be found in the power chart below each performance chart. See section Performance curves. When a pump is fitted with a stuffing box, select the motor size according to ISO 5199.

Find the power curve corresponding to the required QH-value or interpolate between curves.

To select the motor size, read the value of the P2 curve at the duty point and add a 5 % safety margin.

If the motor size must be selected according to ISO 5199, see the table below.

Safety margins according to ISO 5199

Required pump power up to [kW]	Motor power P2 [kW]
0.18	0.25
0.27	0.37
0.40	0.55
0.55	0.75
0.81	1.1
1.1	1.5
1.7	2.2
2.3	3
3.2	4
4.3	5.5
6.1	7.5
9.1	11
12.8	15
15.9	18.5
19	22
26	30
32.5	37
40	45
49	55
68	75
81	90
100	110
120	132
145	160
181	200
227	250
286	315
322	355
364	400

Related information

[Overview](#)

12. Pumped liquids

General recommendations

We recommend NBG and NKG pumps for thin, clean and non-explosive liquids not containing solid particles or fibres.

Liquids with temperatures ranging from -25 to +140 °C are covered in this data booklet.

For liquids ranging from -40 to +220 °C, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858", or contact Grundfos.

Water in heating and ventilating systems often contains additives to prevent negative effects, such as system corrosion or calcareous deposits. In these cases, we recommend special shaft seals to avoid crystallisation/precipitation between the seal faces.

For heating systems, the water quality must meet VDI2035.

"Liquids" in Grundfos.com

Via 'Solutions' on the Grundfos.com webpage a "liquids" module is accessible. This is based on the type and properties of the pumped liquid and gives recommendations with regard to materials for the wetted parts of the pump, i.e. recommend suitable and durable materials for pump housing, impeller, shaft, mechanical shaft seal and O-rings.

The "Liquids" module covers more than 170 widely used liquids.

Please note that other factors also affect the chemical resistance of the pump materials:

- solids
- contaminants
- pressure
- cleaning procedures.

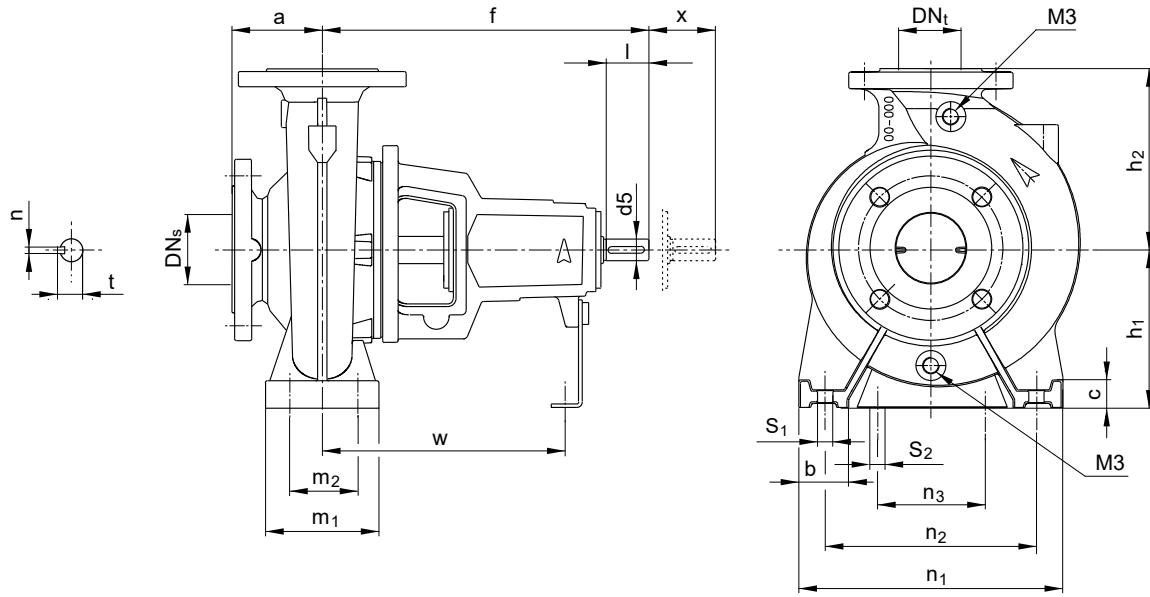
These factors are NOT considered in this tool, and the suitability of the pump material configuration can only be proved through a test.

When selecting the shaft seal and the shaft seal arrangement, we recommend that you consult the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps" for further information.

For pumped liquids with a density and/or viscosity higher than those of water, use motors with correspondingly higher outputs.

13. NKG bare shaft pumps

NKG, centre-line outlet



TM019274

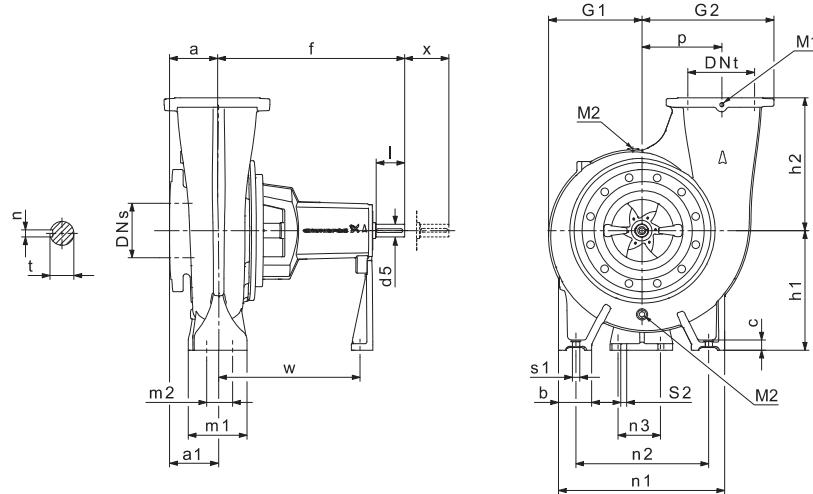
M3 Drain plug or priming plug

Type	Pump [mm]						Supporting feet [mm]							Shaft [mm]				Weight [kg]						
	DNs	DNt	a	f	h1	h2	M3	b	m1	m2	n1	n2	n3	w	S1	S2	c	d5	I	X ³¹⁾	t	n	CI ³²⁾	SS ³³⁾
NKG 50-32-125.1	50	32	80	385	112	140	3/8"	50	100	70	190	140	110	285	M12	M12	14	24	50	100	27	8	44	47
NKG 50-32-125	50	32	80	385	112	140	3/8"	50	100	70	190	140	110	285	M12	M12	14	24	50	100	27	8	44	47
NKG 50-32-160.1	50	32	80	385	132	160	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	45	48
NKG 50-32-160	50	32	80	385	132	160	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	46	49
NKG 50-32-200.1	50	32	80	385	160	180	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	54	57
NKG 50-32-200	50	32	80	385	160	180	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	54	57
NKG 50-32-250	50	32	100	500	180	225	3/8"	65	125	95	320	250	110	370	M12	M12	12	32	80	100	35	10	83	85
NKG 65-50-125	65	50	80	385	112	140	3/8"	50	100	70	210	160	110	285	M12	M12	18	24	50	100	27	8	47	49
NKG 65-50-160	65	50	80	385	132	160	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	48	48
NKG 65-40-200	65	40	100	385	160	180	3/8"	50	100	70	265	212	110	285	M12	M12	18	24	50	100	27	8	55	57
NKG 65-40-250	65	40	100	500	180	225	3/8"	65	125	95	320	250	110	370	M12	M12	18	32	80	100	35	10	81	85
NKG 65-40-315	65	40	125	500	200	250	3/8"	65	125	95	345	280	110	370	M12	M12	16	32	80	100	35	10	124	116
NKG 80-65-125	80	65	100	385	132	160	3/8"	50	100	70	240	190	110	285	M12	M12	18	24	50	100	27	8	50	51
NKG 80-65-160	80	65	100	385	160	180	3/8"	50	100	70	265	212	110	285	M12	M12	18	24	50	100	27	8	52	54
NKG 80-50-200	80	50	100	385	160	200	3/8"	50	100	70	265	212	110	285	M12	M12	17	24	50	100	27	8	58	59
NKG 80-50-250	80	50	125	500	180	225	3/8"	65	125	95	320	250	110	370	M12	M12	18	32	80	100	35	10	86	88
NKG 80-50-315	80	50	125	500	225	280	1/2"	65	125	95	345	280	110	370	M12	M12	17	32	80	100	35	10	130	119
NKG 100-80-125	100	80	100	385	160	180	3/8"	65	125	95	280	212	110	285	M12	M12	18	24	50	100	27	8	55	55
NKG 100-80-160	100	80	100	500	160	200	3/8"	65	125	95	280	212	110	370	M12	M12	18	32	80	100	35	10	72	71
NKG 100-65-200	100	65	100	500	180	225	3/8"	65	125	95	320	250	110	370	M12	M12	18	32	80	140	35	10	81	82
NKG 100-65-250	100	65	125	500	200	250	1/2"	80	160	120	360	280	110	370	M16	M12	22	32	80	140	35	10	111	110
NKG 100-65-315	100	65	125	530	225	280	3/8"	80	160	120	400	315	110	370	M16	M12	22	42	110	140	45	12	141	145
NKG 125-80-160	125	80	125	500	180	225	3/8"	65	125	95	320	250	110	370	M12	M12	18	32	80	140	35	10	81	83
NKG 125-80-200	125	80	125	500	180	250	3/8"	65	125	95	345	280	110	370	M12	M12	18	32	80	140	35	10	95	100
NKG 125-80-250	125	80	125	500	225	280	3/8"	80	160	120	400	315	110	370	M16	M12	23	32	80	140	35	10	115	119
NKG 125-80-315	125	80	125	530	250	315	3/8"	80	160	120	400	315	110	370	M16	M12	22	42	110	140	45	12	152	158
NKG 125-80-400.1	125	80	125	530	280	355	1/2"	80	160	120	435	355	110	370	M16	M12	22	42	110	140	45	12	225	201

Type	Pump [mm]							Supporting feet [mm]								Shaft [mm]					Weight [kg]			
	DNs	DNt	a	f	h1	h2	M3	b	m1	m2	n1	n2	n3	w	S1	S2	c	d5	I	X ³¹⁾	t	n	CI ³²⁾	SS ³³⁾
NKG 125-80-400	125	80	125	530	280	355	1/2"	80	160	120	435	355	110	370	M16	M12	22	42	110	140	45	12	225	201
NKG 125-80-400 ³⁴⁾	125	80	125	660	280	355	1/2"	80	160	120	435	355	140	490	M16	M16	22	48	110	180	51.5	14	-	258
NKG 125-100-160	125	100	125	500	200	280	1/2"	80	160	120	360	280	110	370	M16	M12	17	32	80	140	35	10	100	110
NKG 125-100-200	125	100	125	500	200	280	1/2"	80	160	120	360	280	110	370	M16	M12	23	32	80	140	35	10	107	110
NKG 125-100-250	125	100	140	530	225	280	1/2"	80	160	120	400	315	110	370	M16	M12	24	42	110	140	45	12	137	143
NKG 125-100-315	125	100	140	530	250	315	1/2"	80	160	120	400	315	110	370	M16	M12	22	42	110	140	45	12	161	167
NKG 125-100-400	125	100	140	530	280	355	1/2"	100	200	150	500	400	110	370	M20	M12	22	42	110	140	45	12	236	233
NKG 150-125-200	150	125	140	500	250	315	1/2"	80	160	120	400	315	110	370	M16	M12	19	32	80	140	35	10	141	139
NKG 150-125-250	150	125	140	530	250	355	1/2"	80	160	120	400	315	110	370	M16	M12	22	42	110	140	45	12	158	158
NKG 150-125-315	150	125	140	530	280	355	1/2"	100	200	150	500	400	110	370	M20	M12	17	42	110	140	45	12	190	194
NKG 150-125-400	150	125	140	530	315	400	1/2"	100	200	150	500	400	110	370	M20	M12	22	42	110	140	45	12	254	247
NKG 150-125-500	150	125	180	670	400	500	1/2"	125	200	150	625	500	140	500	M20	M16	28	60	110	180	64	18	503	494
NKG 200-150-200	200	150	160	500	280	400	1/2"	100	200	150	550	450	110	370	M20	M12	26	32	80	180	35	10	190	185
NKG 200-150-250	200	150	160	530	280	375	1/2"	100	200	150	500	400	110	370	M20	M12	20	42	110	180	45	12	199	208
NKG 200-150-315.2	200	150	160	670	315	400	1/2"	100	200	150	550	450	140	500	M20	M16	21	48	110	180	51.5	14	326	330
NKG 200-150-315	200	150	160	670	315	400	1/2"	100	200	150	550	450	140	500	M20	M16	21	48	110	180	51.5	14	324	327
NKG 200-150-400	200	150	160	670	315	450	1/2"	100	200	150	550	450	140	500	M20	M16	19	48	110	180	51.5	14	366	369
NKG 200-150-500	200	150	180	670	400	500	1/2"	125	200	150	625	500	140	500	M20	M16	29	60	110	180	64	18	523	535

³¹⁾ X is the minimum pull-back length of the bearing bracket required for service of impeller and shaft seal.³²⁾ CI: Cast iron version³³⁾ SS: Stainless steel version³⁴⁾ NKG 125-80-400*: oversize shaft (only P2 is greater than or equal to 200 kW, 2-pole, SS version)

NKG, tangential outlet



TM043857

M1/M2 Drain plug or priming plug

Type	Pump [mm]											Supporting feet [mm]							Shaft [mm]			Weight [kg]						
	DNs	DNt	a	a1	f	h1	h2	M1	M2	G1	G2	p	b	m1	m2	n1	n2	n3	w	S1	S2	c	d5	I	X ³⁵⁾	t	n	Cl ³⁶⁾
NKG 250-200-400	250	200	170	180	698	400	400	3/8"	1/2"	331	485	315	125	200	150	625	500	140	519	M20	M16	33	48	110	180	51.5	14	428
NKG 250-200-450	250	200	150	154	691	400	450	3/8"	1/2"	355	525	355	125	200	150	625	500	140	519	M20	M16	33	48	110	180	51.5	14	443
NKG 300-250-350	300	250	175	185	739	450	400	3/8"	1/2"	379	523	320	125	200	150	625	500	140	559	M20 ³⁷⁾	M16	33	48	110	180	51.5	14	528
NKG 300-250-400	300	250	160	173	714	450	500	3/8"	1/2"	350	498	295	125	200	150	625	500	140	532	M20 ³⁷⁾	M16	33	48	110	180	51.5	14	479
NKG 300-250-450	300	250	165	173	704	450	500	3/8"	1/2"	374	563	360	125	200	150	625	500	140	515	M20	M16	33	60	110	180	64	18	557
NKG 300-250-500	300	250	165	170	709	450	500	3/8"	1/2"	441	598	395	125	200	150	725	600	140	528	M20 ³⁷⁾	M16	33	60	110	180	64	18	670
NKG 350-300-305	350	300	201	253	780	480	400	3/8"	1/2"	416	560	330	140	215	180	640	500	140	558	M20	M16	33	48	110	180	51.5	14	595

³⁵⁾ X is the minimum pull-back length of the bearing bracket required for service of impeller and shaft seal.³⁶⁾ Cl: Cast iron version³⁷⁾ For stainless steel and duplex steel versions, S1 is M24.

14. Pump flange dimensions

Fixed pump flanges, EN 1092-2

EN 1092-2 is the standard used for cast iron pump flanges. The flange dimensions are stated in mm.

EN 1092-2													
Nominal diameter													
	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300	DN 350	
PN 10	D ₁	32	40	50	65	80	100	125	150	200	250	300	350
	D ₂	100	110	125	145	160	180	210	240	295	350	400	460
	D ₃	140	150	165	185	200	220	250	285	340	395	445	505
PN 16	S	4 x Ø19	4 x Ø19	4 x Ø19	4 x Ø19	8 x Ø19	8 x Ø19	8 x Ø23	8 x Ø23	12 x Ø23	12 x Ø23	16 x Ø23	
	D ₂	100	110	125	145	160	180	210	240	295	355	410	470
	D ₃	140	150	165	185	200	220	250	285	340	405	460	520
S 4 x Ø19 4 x Ø19 4 x Ø19 4 x Ø19 8 x Ø19 8 x Ø19 8 x Ø19 8 x Ø23 12 x Ø23 12 x Ø28 12 x Ø28 16 x Ø28													

Fixed pump flanges, AS2129 table E

AS2129 table E is the Australian standard for cast iron pump flanges. The flanges are available on request.

The flange dimensions are stated in mm.

Nominal flange size		32	40	50	65	80	100	125	150	200
Flange diameter	A	140	150	165	185	200	220	250	285	340
Pitch circle diameter	B	87	98	114	127	146	178	210	235	292
Flange thickness	C	18	18	20	20	22	24	26	26	30
Hole diameter	D	14	14	18	18	18	18	18	22	22
Number of holes	N	4	4	4	4	4	8	8	8	8


Fixed pump flanges, EN 1092-1

EN 1092-1 is the standard used for steel pump flanges. The flange dimensions are stated in mm.

Loose pump flanges, EN 1092-1

EN 1092-1 is the standard used for stainless steel pump flanges. The flange dimensions are stated in mm.

		EN 1092-1											
		Nominal diameter											
		DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300	
PN 10	D ₁	32	40	50	65	80	100	125	150	200	250	300	
	D ₂	100	110	125	145	160	180	210	240	295	350	400	
	D ₃	140	150	165	185	200	220	250	285	340	395	445	
PN 16	S	4 x Ø19	4 x Ø19	4 x Ø19	4 x Ø19	8 x Ø19	8 x Ø19	8 x Ø19	8 x Ø23	8 x Ø23	12 x Ø23	12 x Ø23	
	D ₂	100	110	125	145	160	180	210	240	295	355	410	
	D ₃	140	150	165	185	200	220	250	285	340	405	460	
PN 25	S	4 x Ø19	4 x Ø19	4 x Ø19	4 x Ø19	8 x Ø19	8 x Ø19	8 x Ø19	8 x Ø23	12 x Ø23	12 x Ø28	12 x Ø28	
	D ₂	100	110	125	145	160	190	220	250	310	370	430	
	D ₃	140	150	165	185	200	235	270	300	360	425	485	
PN 40	S	4 x Ø19	4 x Ø19	4 x Ø19	8 x Ø19	8 x Ø19	8 x Ø23	8 x Ø28	8 x Ø28	12 x Ø28	12 x Ø30	16 x Ø30	
	D ₂	100	110	125	145	160	190	220	250	320	385	450	
	D ₃	140	150	165	185	200	235	270	300	375	450	515	
		S	4 x Ø19	4 x Ø19	4 x Ø19	8 x Ø19	8 x Ø19	8 x Ø23	8 x Ø28	8 x Ø28	12 x Ø31	12 x Ø33	16 x Ø33



TM027720

Loose pump flanges, ASME B16.5

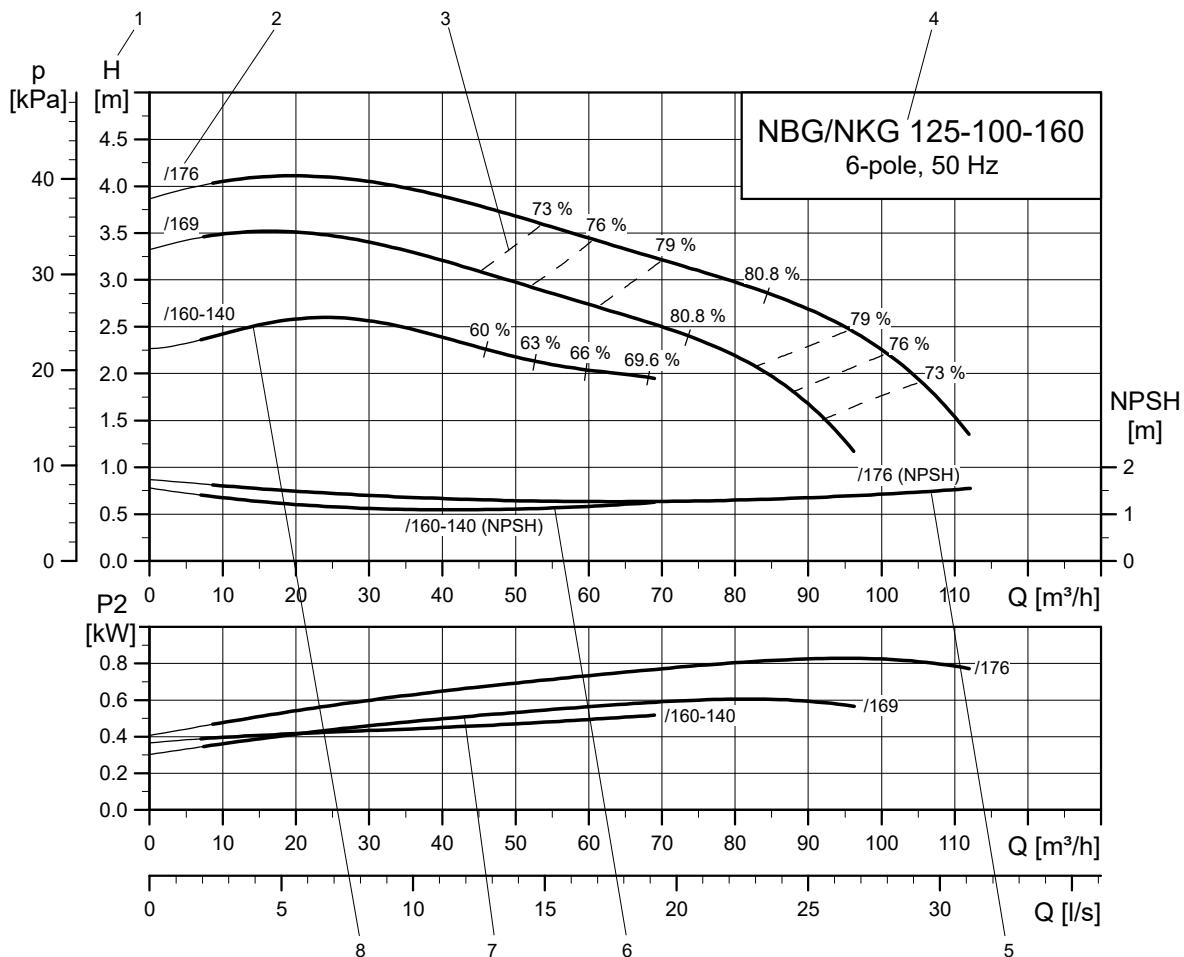
ASME B16.5 is the standard used for stainless steel pump flanges. Material of flange: AISI 316/A105.

Loose pump flanges, JIS B 2220

JIS B 2220 is the standard used for stainless steel pump flanges. The flange dimensions are stated in mm.
Material of flange: EN 1.4408/GGG50.

15. Introduction to curves and technical data

How to read the curve charts



TN08694

Pos.	Description
1	Total pump head, p [kPa] or H [m] = H_{total}
2	Impeller diameter [mm]
3	Hydraulic efficiency curves are shown as dashed lines, eta [%]
4	Pump type, pole number and frequency
5	The NPSH curve is shown for maximum impeller size.
6	The NPSH curve is shown for minimum impeller size.
7	The power curve indicates pump input power P_2 [kW]
8	QH curve for the individual pump. The bold curve shows the recommended performance range.

The shown pump performance curves in section Performance curves represent the pump in combination with an IE3 motor.

- 2-pole: P_2 less than or equal to 22 kW, pump with MG motor; P_2 greater than or equal to 30 kW, pump with Siemens motor.
- 4-pole: P_2 less than or equal to 15 kW, pump with MG motor; P_2 greater than or equal to 18.5 kW, pump with Siemens motor.
- 6-pole: Pump with Siemens motor.
- 8-pole: Pump with Siemens motor.

Related information

[Overview](#)

Curve conditions

The guidelines below apply to the curves shown in the section Performance curves.

- Tolerances are according to ISO 9906:2012 Grade 3B.
- The curves show pump performance with different impeller diameters at the nominal speed.
- The bold part of the curves show the recommended operating range.
- We do not recommend the thin parts as the possible operating range here might suggest the selection of a smaller or larger pump type.
- Do not use the pumps at minimum flow rates below $0.1 \times Q_{max}$ because of the danger of overheating the pump.
- The curves apply to the pumping of water at a temperature of 20 °C and a kinematic viscosity of 1 mm²/s (1 cSt).
- **Eta:** The dashed lines show values of the hydraulic efficiency of the pump.
- **NPSH:** The curves show maximum values measured under the same conditions as the performance curves.
- In case of other densities than 1000 kg/m³, the outlet pressure is proportional to the density.
- When pumping liquids with a density higher than 1000 kg/m³, motors with correspondingly higher outputs must be used.
- When a pump is fitted with a stuffing box, select the motor size according to ISO 5199.

Calculation of total head

The total pump head consists of the height difference between the measuring points + the differential head + the dynamic head.

$$H_{total} = H_{geo} + H_{stat} + H_{dyn}$$

H_{geo}	Height difference between measuring points.
H_{stat}	Differential head between the inlet and outlet sides of the pump.
H_{dyn}	Calculated values based on the velocity of the pumped liquid on the inlet and outlet sides of the pump.

Pump performance testing

NB, NBG, NK and NKG testers are all capable of performing hydraulic performance tests according to ISO 9906:2012 requirements.

The standard ISO 9906:2012 sets standards for "rotodynamic pumps, Hydraulic performance acceptance tests, Grades 1, 2 and 3".

Performance acceptance grades

Six pump-performance-test acceptance grades, 3B, 2B, 2U, 1B, 1E and 1U are defined in ISO 9906:2012.

Acceptance grade	Mandatory measurements		Optional measurements	
	Q	H	P1	Eta-tot
3B	± 9 %	± 7 %	+ 9 %	- 7 %
2B	± 8 %	± 5 %	+ 8 %	- 5 %
2U	+ 16 %	+ 10 %	+ 16 %	
1B	± 5 %	± 3 %	+ 4 %	- 3 %
1E	± 5 %	± 3 %	+ 4 %	
1U	+ 10 %	+ 6 %	+ 10 %	≥ 0 %

Q: Flow

H: Head

P1: Total consumed power

Eta-tot: Total efficiency

These tolerance grades can be used in the contract between the pump manufacturer and the purchaser, or they can be used in a default tolerance factor which will apply if no specific tolerance grade has been agreed between the manufacturer and the customer.

The performance acceptance grades are explained in section Specifying acceptance grades, showing the performance grades related to an ordinary pump curve.

Related information

[Specifying acceptance grades](#)

[Acceptance grades and tolerances](#)

The guarantee point

According to ISO 9906:2012 the acceptance-grade tolerance applies to one guarantee point.

A guarantee point is defined by a guaranteed flow and a guaranteed head.

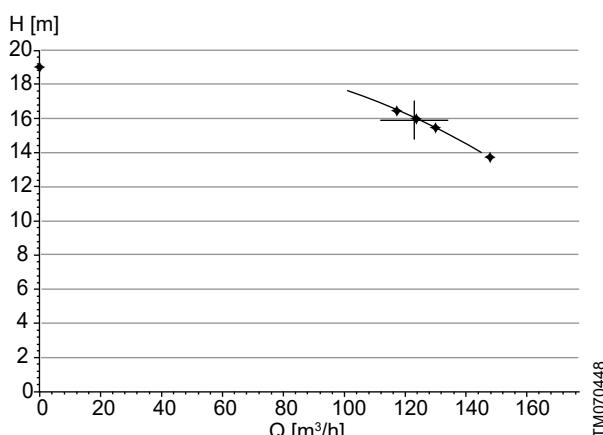
In addition either minimum total efficiency or maximum total input power may be guaranteed at the specified conditions.

This means that the standard sets guidelines for a duty point guaranteed for the following:

- Q and H - or
- Q, H and total efficiency (Eta-total) - or
- Q, H and total consumed power (P1).

The guarantee point is defined by a minimum of five measured test points.

Example on a duty point test living up to ISO 9906:2012 requirements

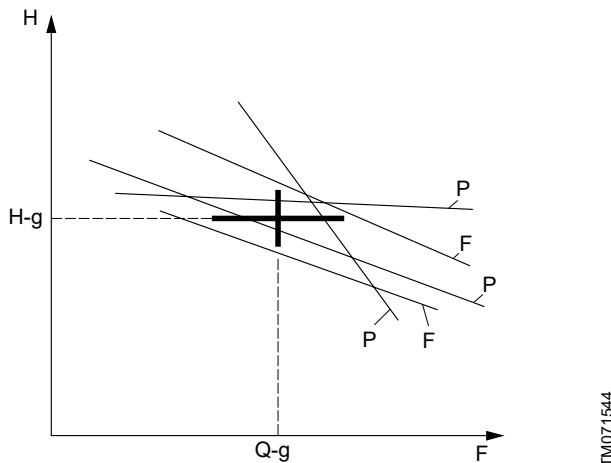


Five measured test points are used to verify one guarantee point

Evaluation of performance

The test must show that the measured pump curve touches or passes through a tolerance surrounding the guarantee point, as defined by the selected acceptance grade.

Guarantee-point evaluation must be made at the rated speed, which for NB, NBG, NK, NKG pumps means 50 Hz or 60 Hz.



Pump curves that either pass or fail to cross the tolerance cross of the guarantee point

Pos.	Description
H	Head
H-g	H-guaranteed
Q-g	Q-guaranteed
F	Flow
P	Pass
F	Fail

Performance-test types for end-suction pumps

Two types of performance tests are available for NBG, NBGE, NKG, NKGE pumps:

- duty-point-verification test
- curve test.

Tests carried out on pumps

- Tests are saved for at least five years and can be traced using the pump's unique serial number.
- It is not possible to change acceptance grade on an already tested and supplied pump - if this should be required a re-test of the pump is needed.
- Witness testing can be arranged.

Duty-point-verification test, Grades 3B, 2B, 2U, 1B, 1E and 1U

This test method offers the possibility to perform a duty-point verification of the following:

- Q and H - or
- Q, H and total efficiency (Eta-tot) - or
- Q, H and total consumed power (P_1).

Acceptance grade	Mandatory measurements		Optional measurements	
	Q	H	P_1	Eta-tot
3B	Standard			On request
2B		On request		On request
2U				On request
1B				
1E		On request		On request
1U				

What Grundfos is able to guarantee for the different acceptance grades will be evaluated case by case. Contact your local sales company on this.

Grundfos makes duty-point verification according to ISO 9906:2012 for one guarantee point at full speed, 50 or 60 Hz. The customer must tell Grundfos which duty point to verify.

The requested duty point is verified by five measured points.

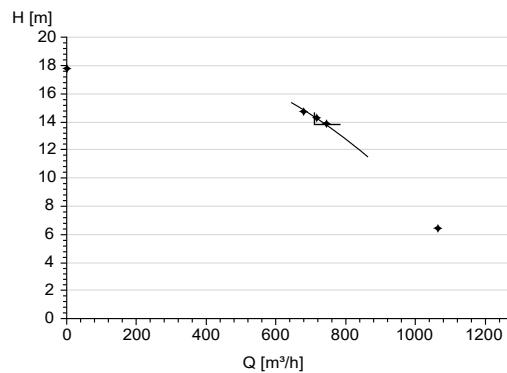
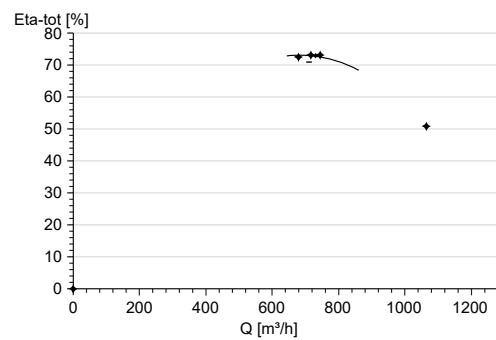
Grade 1U duty-point verification

The following example illustrates performance testing according to Grade 1U.

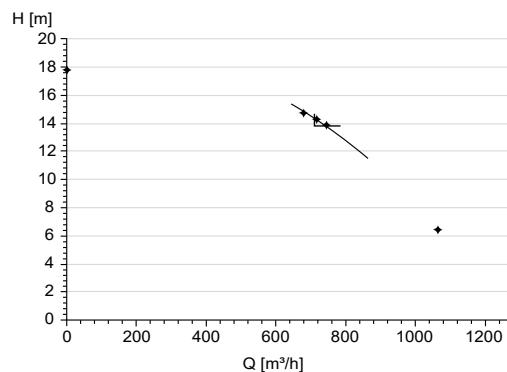
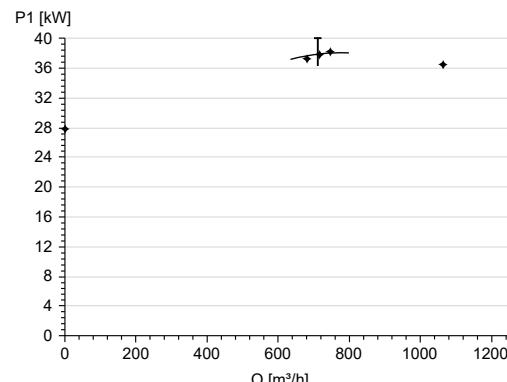
Flow and head are mandatory and efficiency or power consumption, P_1 , is optional.

Tolerances for a Grade 1U test are as follows:

- Flow: + 10 %
 - Head: + 6 %
 - Efficiency: 0 %, only equal to or better than the guaranteed value
 - P_1 : + 10 %
1. Q, H and Eta-tot is tested and verified

**Measured values for flow and head****Measured values for total efficiency**

2. Q, H and P1 is tested and verified

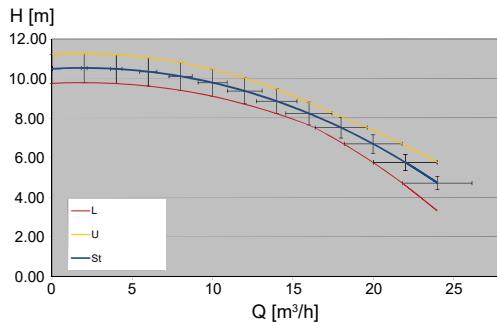
**Measured values for flow and head****Measured values for consumed power**

Note that other points than the guarantee point can be measured and displayed in a curve-test report according to Grade 3B tolerances.

Curve test, Grade 3B

This test method is developed by Grundfos and is based on ISO 9906:2012 performance acceptance grade 3B tolerances: $Q = \pm 9\%$, $H = \pm 7\%$.

TM071542



TM071515

Q-H curve with tolerance crosses on complete performance range

TM071543

Pos. Description

L	Lower limit
U	Upper limit
St	Standard curve

On figure above tolerance crosses according to Grade 3B have been distributed across the complete performance range of a pump. We generate the upper and lower limit of the performance curve by drawing two curves at the outlines of these crosses.

When the pump is tested and the measured point is located within the range between upper and lower limit, it is qualified to ISO 9906:2012 Grade 3B tolerances. This way of qualifying the pump performance is stricter than a duty-point-verification test for Grade 3B.

How does Grundfos make curve testing for pumps

Grundfos makes the curve test in one of the following two ways:

- a reference-curve test
- a performance-curve test.

TM071544

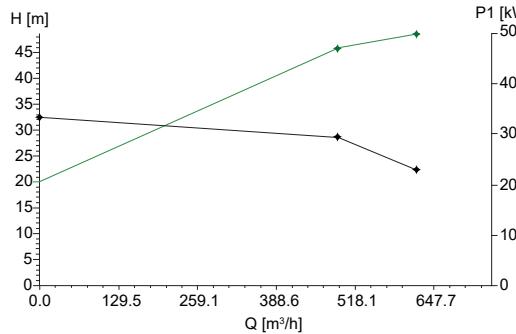
TM071545

Reference-curve test, Grade 3B

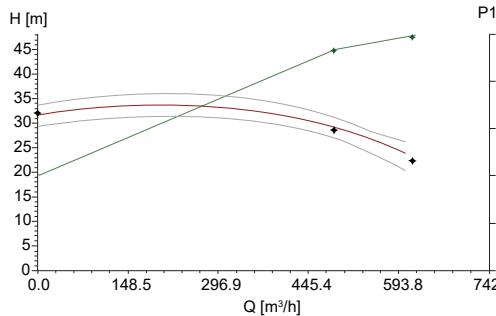
A reference test is made when no curve-test report is specified with the order. Three or four test points are measured depending on production site, and no curve-test report is supplied with the pump.

Measurements are made to maintain and observe continuous quality and to ensure that the supplied pump is within test-grade tolerances. Test-grade tolerances are set as for Grade 3B but without certification.

Example of a reference-curve test



Measured values for tested pump



The values in fig. Measured values for tested pump calculated to a reference speed for comparison to a reference performance curve

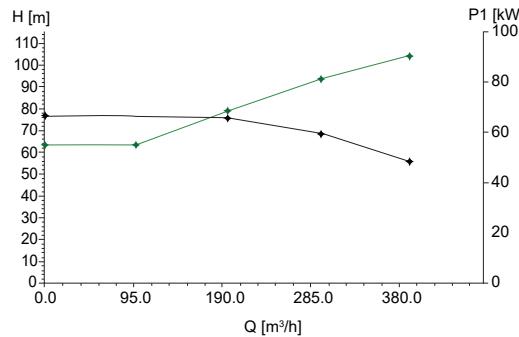
If a pump-performance report is requested at a later stage only reference-test data are available.

Performance-curve test, Grade 3B

A performance-curve test is made when a curve test report is specified with the order.

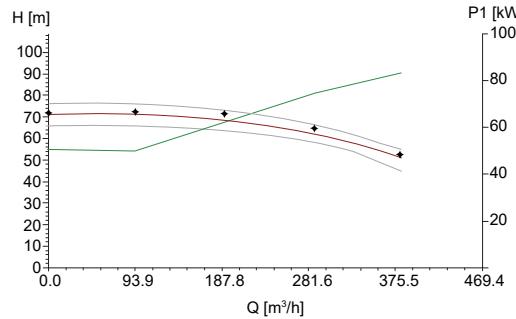
The pump is tested at pre-specified flows, distributed over the full pump curve - minimum five points, and test grade tolerances are set as for Grade 3B but without certification.

Example of a performance curve test



TM070447

Measured values for tested pump



TM070446

The values in fig. Measured values for tested pump calculated to a reference speed for comparison to a reference performance curve

If the customer requires more points on the curve to be checked, individual measurements must be made and this is not part of the performance curve test.

Static high pressure test

All produced pumps undergo a static high pressure test of 1.5 x PN (pressure rating of the pump).

Specifying acceptance grades

The graphs in section Acceptance grades and tolerances show the tolerances as stated in the standard, related to an ordinary pump curve. The graphs also show which pump performance to expect if the customer, having the same pump to start with, orders a pump with the same guarantee point for different tolerances (B, E or U) within the acceptance grades.

In some cases it will not be possible to fulfil the same guarantee point for a unilateral tolerance as it will for a bilateral tolerance. This is indicated by the lowered curve for "E" and "U" grades.

If the requested guarantee point is the same for a Grade U pump as for a Grade B pump, the consequence of the production tolerances could result in a larger pump being required to obtain the requested duty point.

What Grundfos is able to guarantee for the different acceptance grades will be evaluated case by case. Contact your local sales company on this.

Acceptance grades and tolerances

Acceptance grade B

This acceptance grade refers to grades with a bilateral tolerance on flow and head and with a tolerance on efficiency.

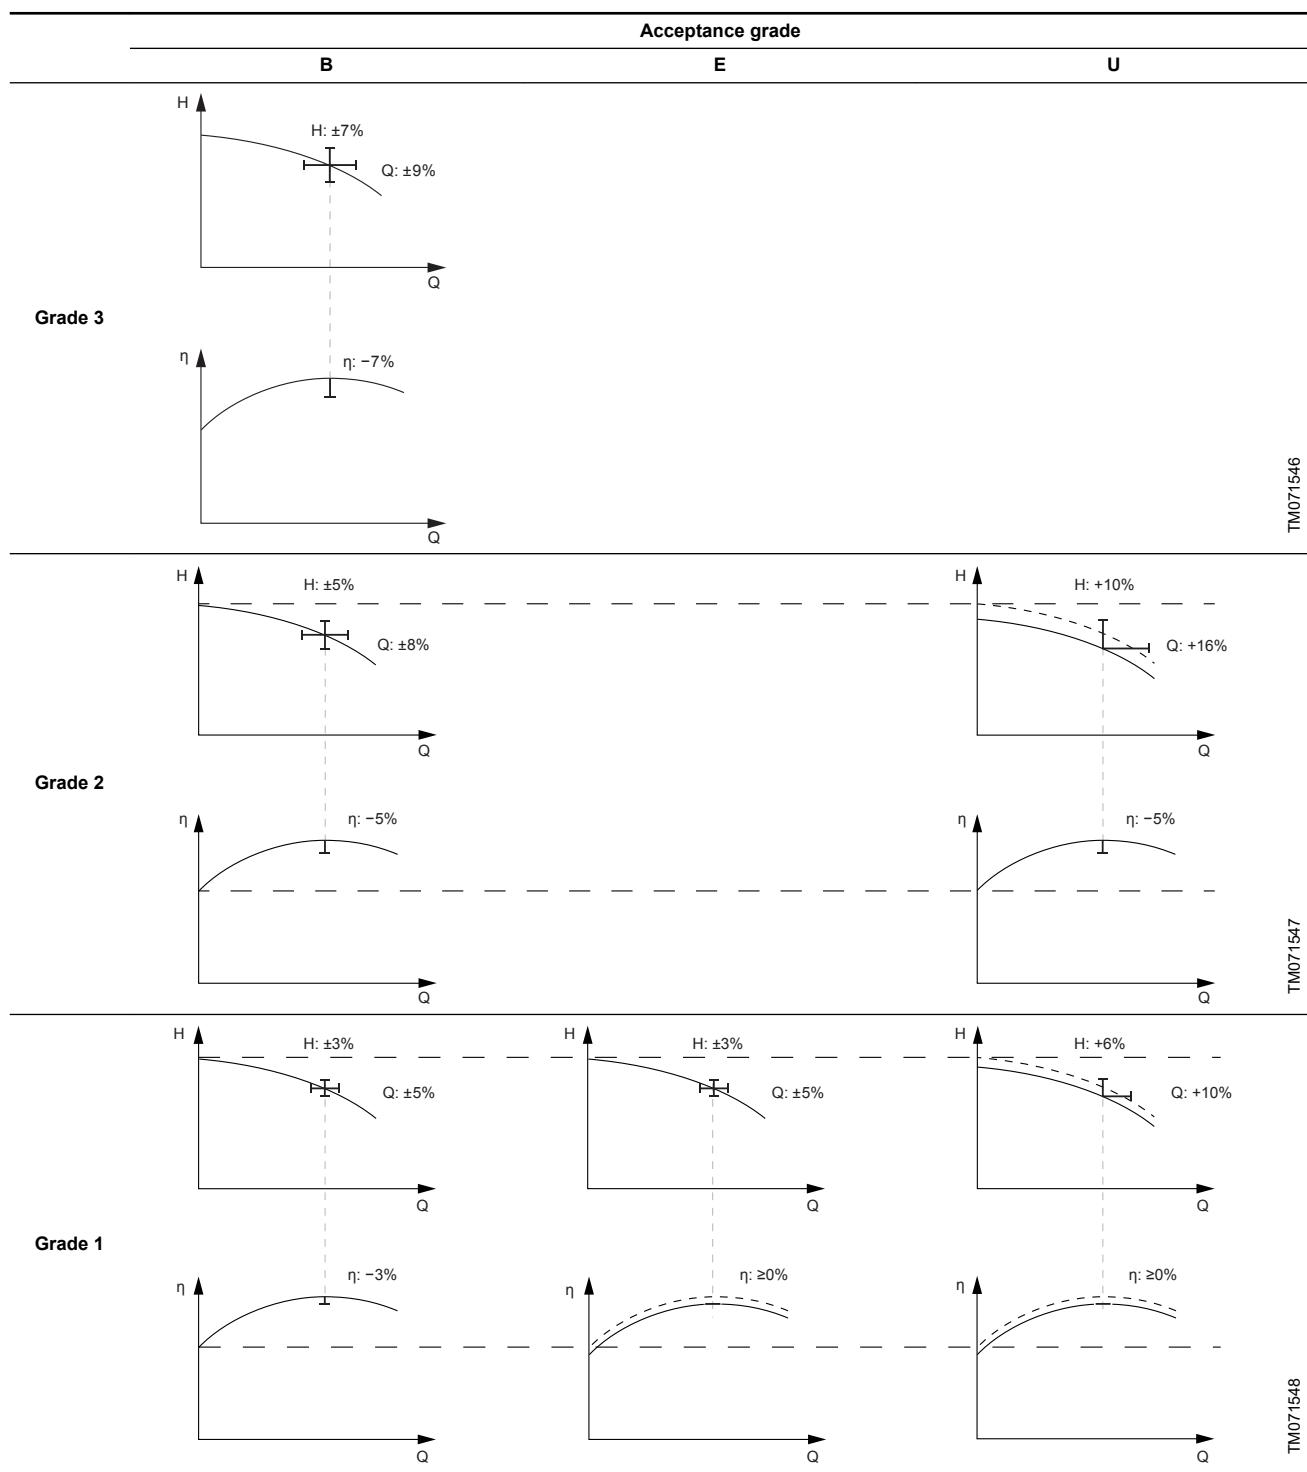
Acceptance grade E

This acceptance grade refers to a grade with a bilateral tolerance on flow and head but without tolerance on efficiency.

Acceptance grade U

This acceptance grade refers to a grade with a unilateral tolerance on flow and head. For the 2U grade there is a tolerance on efficiency. For the 1U grade there is no tolerance on efficiency.

Note that if the acceptance grade changes from Grade 1B to 1U, the customer does not necessarily get a better pump with a higher efficiency. More likely, he gets a pump where the performance is always to the positive side of the guarantee point.

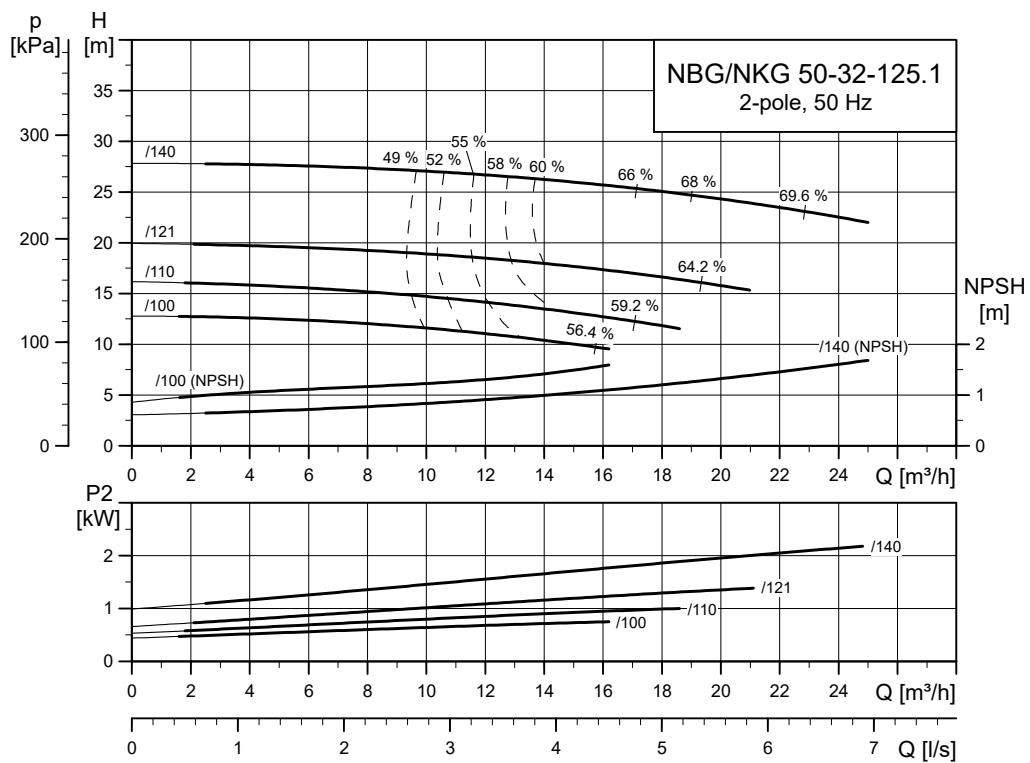


16. Performance curves

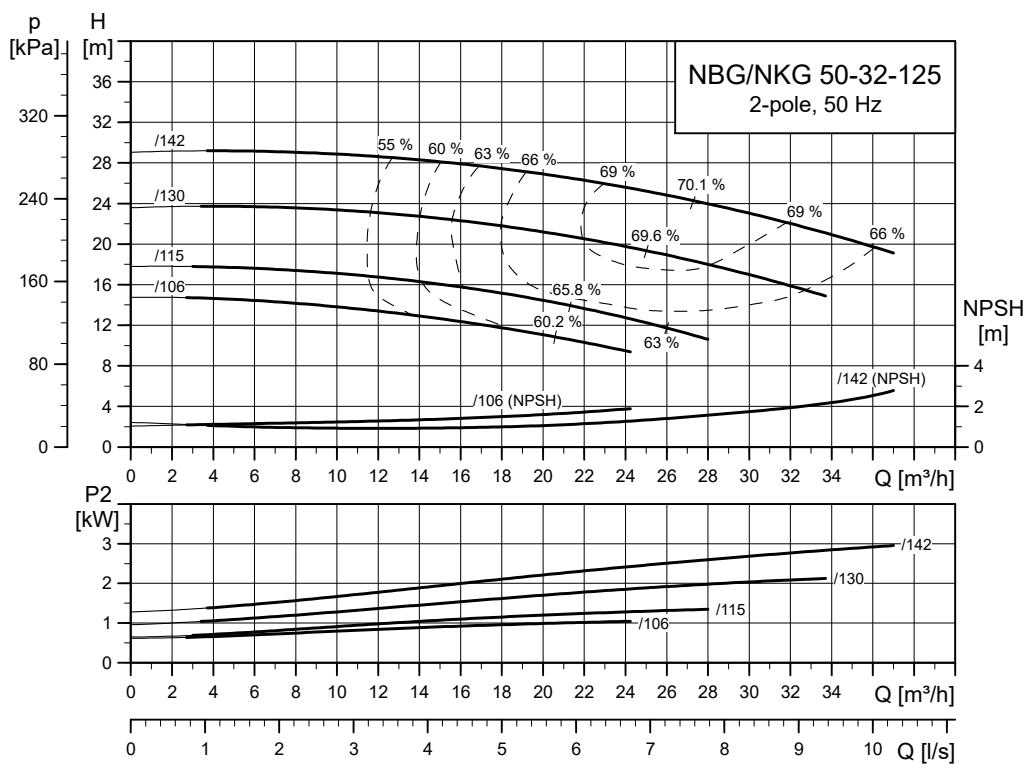
Overview

Pump size	2-pole	4-pole	6-pole	8-pole
NBG, NKG 50-32-125.1	NBG, NKG 50-32-125.1	NBG, NKG 50-32-125.1	-	-
NBG, NKG 50-32-125	NBG, NKG 50-32-125	NBG, NKG 50-32-125	-	-
NBG, NKG 50-32-160.1	NBG, NKG 50-32-160.1	NBG, NKG 50-32-160.1	-	-
NBG, NKG 50-32-160	NBG, NKG 50-32-160	NBG, NKG 50-32-160	-	-
NBG, NKG 50-32-200.1	NBG, NKG 50-32-200.1	NBG, NKG 50-32-200.1	-	-
NBG, NKG 50-32-200	NBG, NKG 50-32-200	NBG, NKG 50-32-200	-	-
NBG, NKG 50-32-250	NBG, NKG 50-32-250	NBG, NKG 50-32-250	-	-
NBG, NKG 65-50-125	NBG, NKG 65-50-125	NBG, NKG 65-50-125	-	-
NBG, NKG 65-50-160	NBG, NKG 65-50-160	NBG, NKG 65-50-160	-	-
NBG, NKG 65-40-200	NBG, NKG 65-40-200	NBG, NKG 65-40-200	-	-
NBG, NKG 65-40-250	NBG, NKG 65-40-250	NBG, NKG 65-40-250	-	-
NBG, NKG 65-40-315	NBG, NKG 65-40-315	NBG, NKG 65-40-315	-	-
NBG, NKG 80-65-125	NBG, NKG 80-65-125	NBG, NKG 80-65-125	-	-
NBG, NKG 80-65-160	NBG, NKG 80-65-160	NBG, NKG 80-65-160	-	-
NBG, NKG 80-50-200	NBG, NKG 80-50-200	NBG, NKG 80-50-200	-	-
NBG, NKG 80-50-250	NBG, NKG 80-50-250	NBG, NKG 80-50-250	-	-
NBG, NKG 80-50-315	NBG, NKG 80-50-315	NBG, NKG 80-50-315	-	-
NBG, NKG 100-80-125	NBG, NKG 100-80-125	NBG, NKG 100-80-125	-	-
NBG, NKG 100-80-160	NBG, NKG 100-80-160	NBG, NKG 100-80-160	-	-
NBG, NKG 100-65-200	NBG, NKG 100-65-200	NBG, NKG 100-65-200	-	-
NBG, NKG 100-65-250	NBG, NKG 100-65-250	NBG, NKG 100-65-250	-	-
NBG, NKG 100-65-315	NBG, NKG 100-65-315	NBG, NKG 100-65-315	-	-
NBG, NKG 125-80-160	NBG, NKG 125-80-160	NBG, NKG 125-80-160	-	-
NBG, NKG 125-80-200	NBG, NKG 125-80-200	NBG, NKG 125-80-200	-	-
NBG, NKG 125-80-250	NBG, NKG 125-80-250	NBG, NKG 125-80-250	-	-
NBG, NKG 125-80-315	NBG, NKG 125-80-315	NBG, NKG 125-80-315	-	-
NBG, NKG 125-80-400.1	NBG, NKG 125-80-400.1	-	-	-
NBG, NKG 125-80-400	NBG, NKG 125-80-400	NBG, NKG 125-80-400	-	-
NBG, NKG 125-100-160	NBG, NKG 125-100-160	NBG, NKG 125-100-160	NBG, NKG 125-100-160	-
NBG, NKG 125-100-200	NBG, NKG 125-100-200	NBG, NKG 125-100-200	NBG, NKG 125-100-200	-
NBG, NKG 125-100-250	NBG, NKG 125-100-250	NBG, NKG 125-100-250	NBG, NKG 125-100-250	-
NBG, NKG 125-100-315	NBG, NKG 125-100-315	NBG, NKG 125-100-315	NBG, NKG 125-100-315	-
NBG, NKG 125-100-400	-	NBG, NKG 125-100-400	NBG, NKG 125-100-400	-
NBG, NKG 150-125-200	NBG, NKG 150-125-200	NBG, NKG 150-125-200	NBG, NKG 150-125-200	-
NBG, NKG 150-125-250	NBG, NKG 150-125-250	NBG, NKG 150-125-250	NBG, NKG 150-125-250	-
NBG, NKG 150-125-315	NBG, NKG 150-125-315	NBG, NKG 150-125-315	NBG, NKG 150-125-315	-
NBG, NKG 150-125-400	-	NBG, NKG 150-125-400	NBG, NKG 150-125-400	-
NBG, NKG 150-125-500	-	NBG, NKG 150-125-500	NBG, NKG 150-125-500	-
NBG, NKG 200-150-200	NBG, NKG 200-150-200	NBG, NKG 200-150-200	NBG, NKG 200-150-200	-
NBG, NKG 200-150-250	NBG, NKG 200-150-250	NBG, NKG 200-150-250	NBG, NKG 200-150-250	-
NBG, NKG 200-150-315.2	NBG, NKG 200-150-315.2	NBG, NKG 200-150-315.2	NBG, NKG 200-150-315.2	-
NKG 200-150-315	NKG 200-150-315	NBG, NKG 200-150-315	NBG, NKG 200-150-315	-
NKG 200-150-400	-	NBG, NKG 200-150-400	NBG, NKG 200-150-400	-
NKG 200-150-500	-	NBG, NKG 200-150-500	NBG, NKG 200-150-500	-
NKG 250-200-400	-	NBG, NKG 250-200-400	NBG, NKG 250-200-400	-
NKG 250-200-450	-	NBG, NKG 250-200-450	NBG, NKG 250-200-450	-
NKG 300-250-350	-	NBG, NKG 300-250-350	NBG, NKG 300-250-350	-
NKG 300-250-400	-	NBG, NKG 300-250-400	NBG, NKG 300-250-400	-

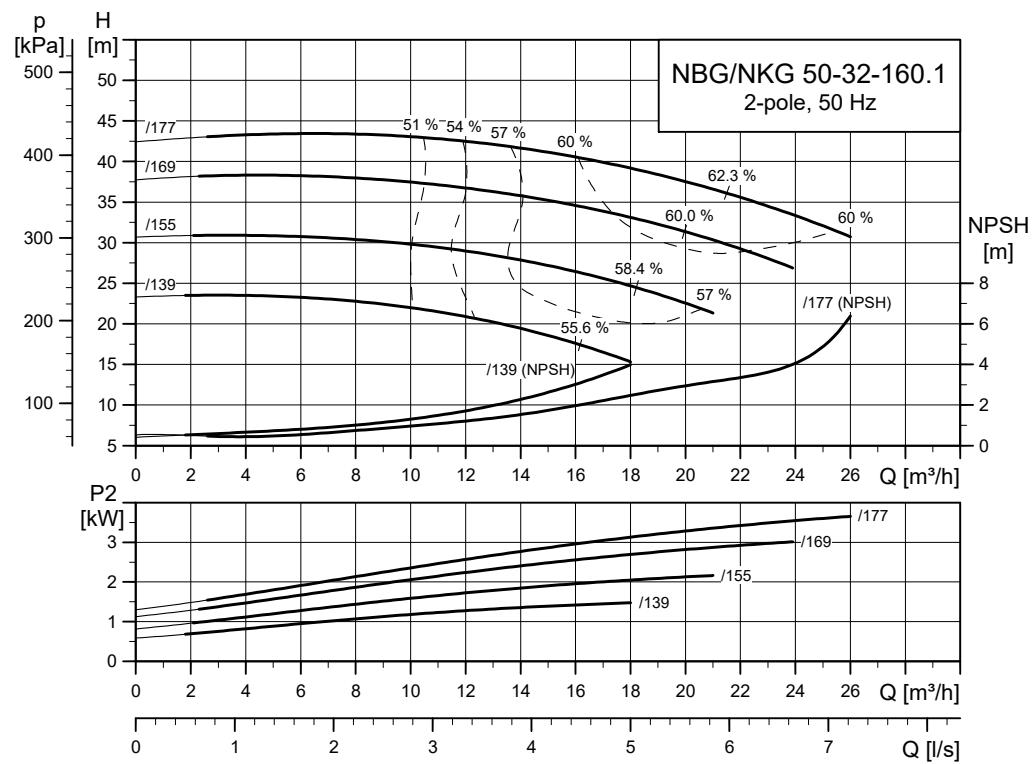
Pump size	2-pole	4-pole	6-pole	8-pole
NKG 300-250-450	-	NBG, NKG 300-250-450	NBG, NKG 300-250-450	-
NKG 300-250-500	-	NBG, NKG 300-250-500	NBG, NKG 300-250-500	-
NKG 350-300-305	-	NBG, NKG 350-300-305	NBG, NKG 350-300-305	NBG, NKG 350-300-305

2-pole**NBG, NKG 50-32-125.1**

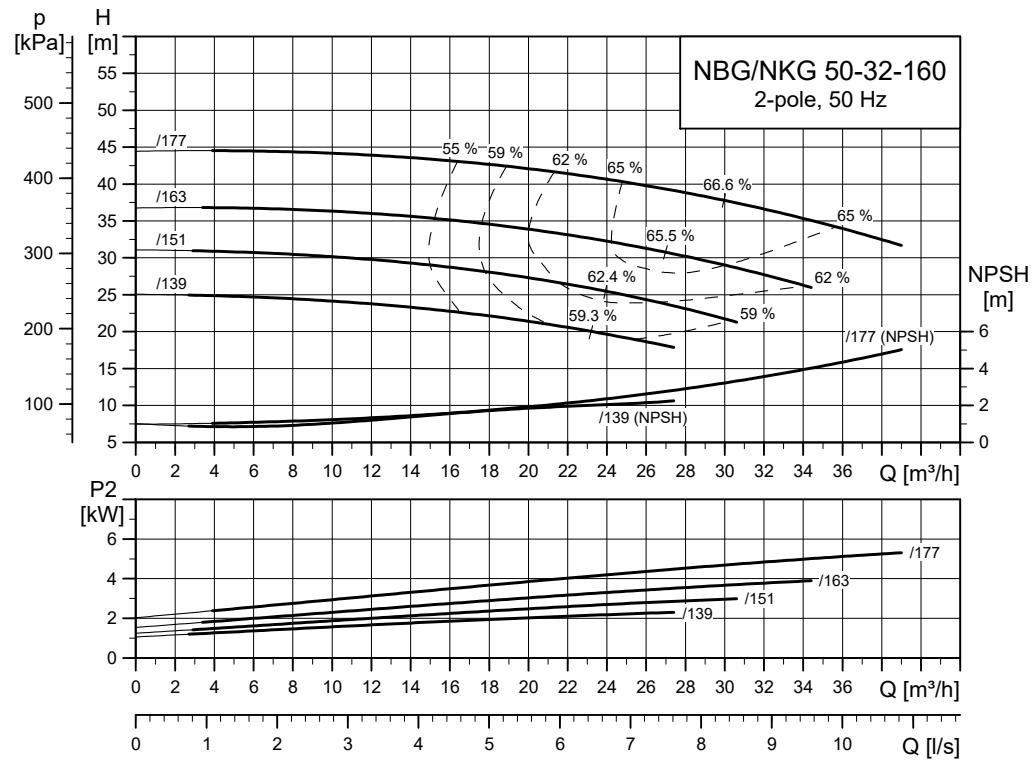
TM034902

NBG, NKG 50-32-125

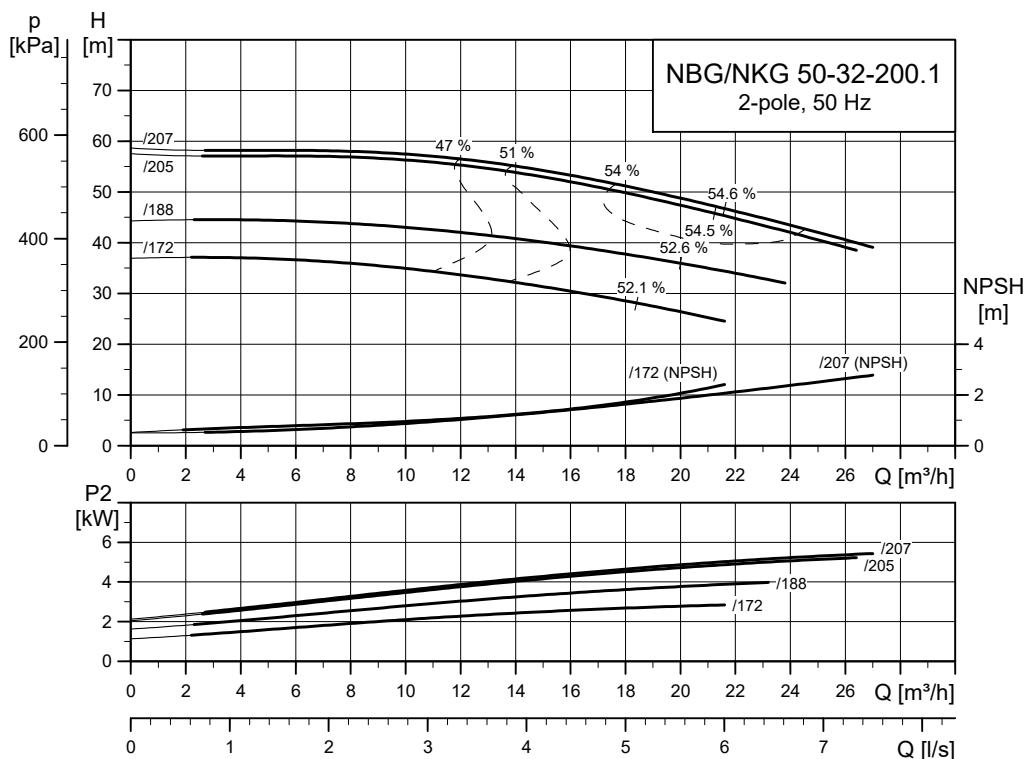
TM034905

NBG, NKG 50-32-160.1

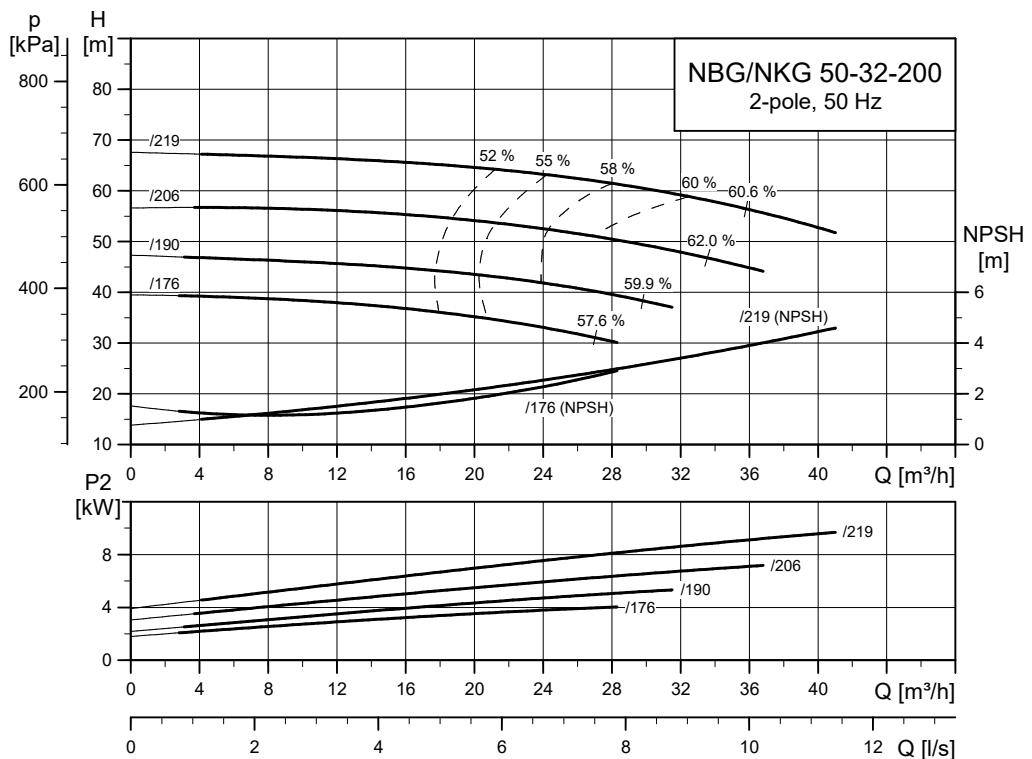
TM034903

NBG, NKG 50-32-160

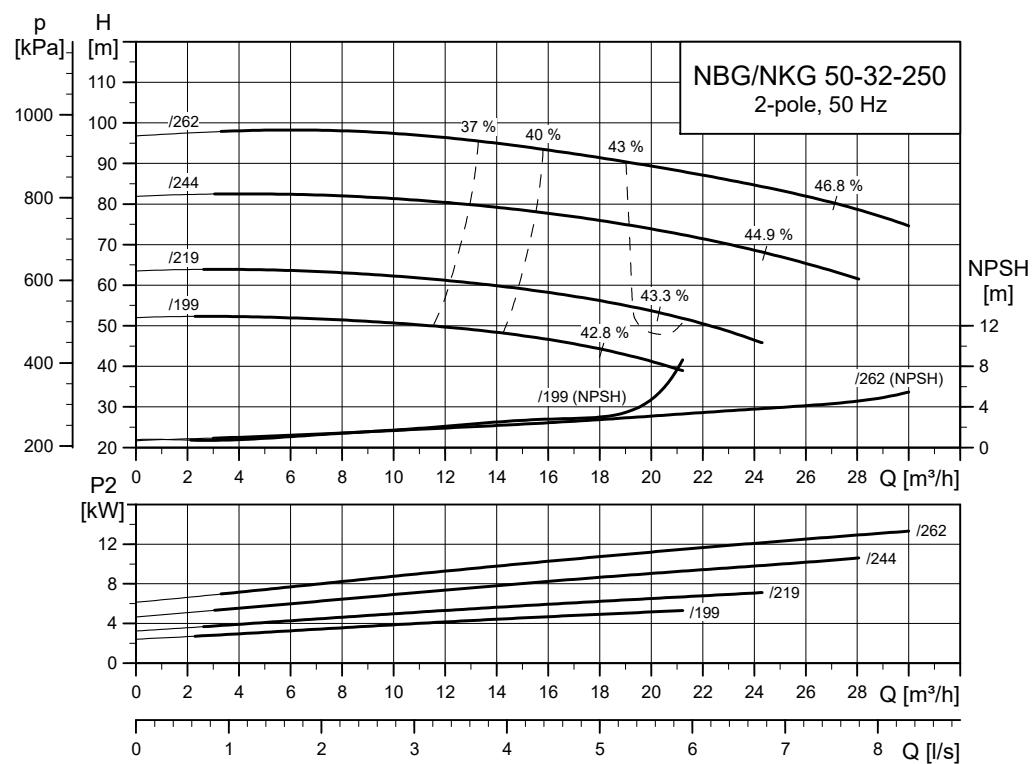
TM034906

NBG, NKG 50-32-200.1

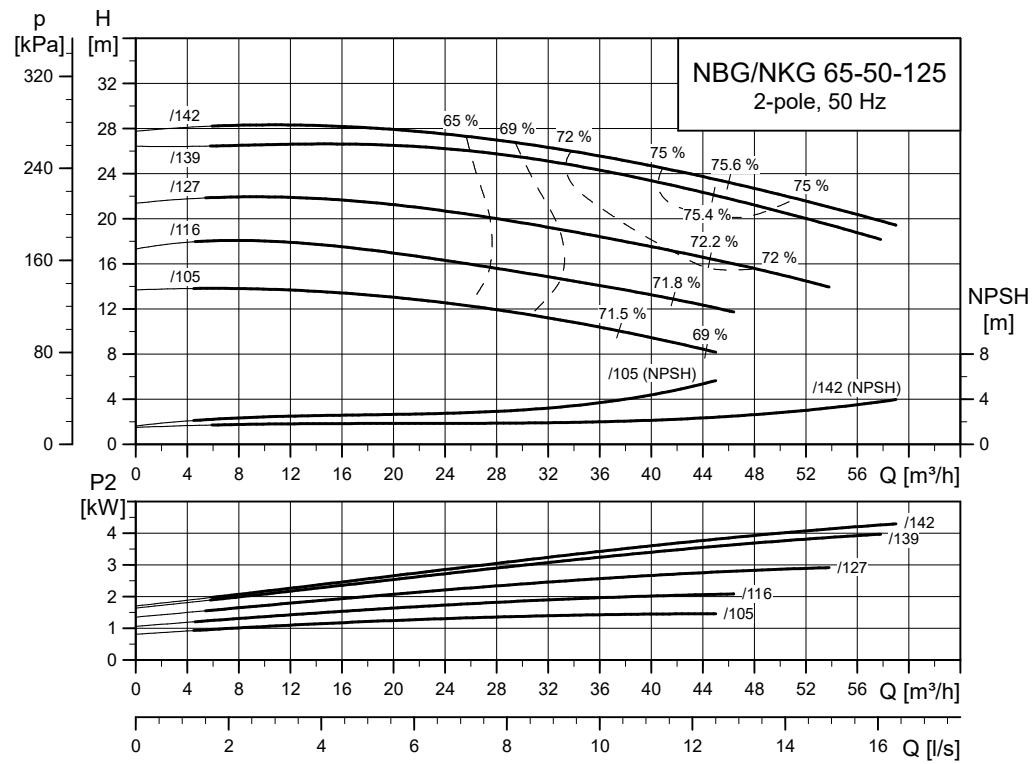
TM034904

NBG, NKG 50-32-200

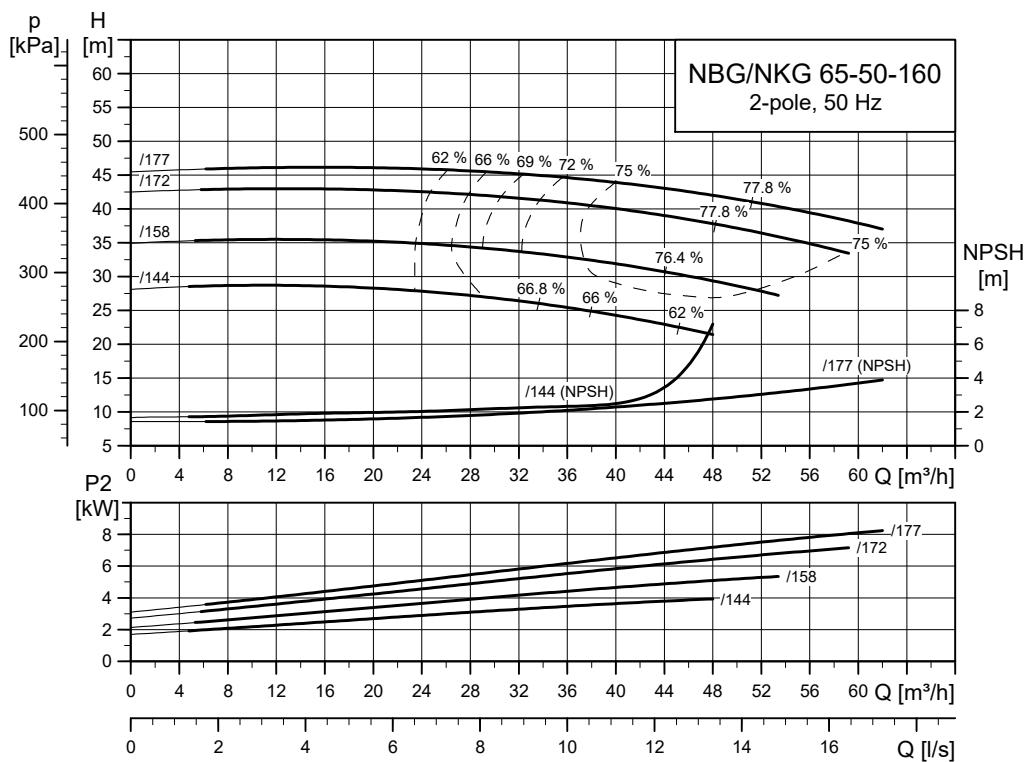
TM034907

NBG, NKG 50-32-250

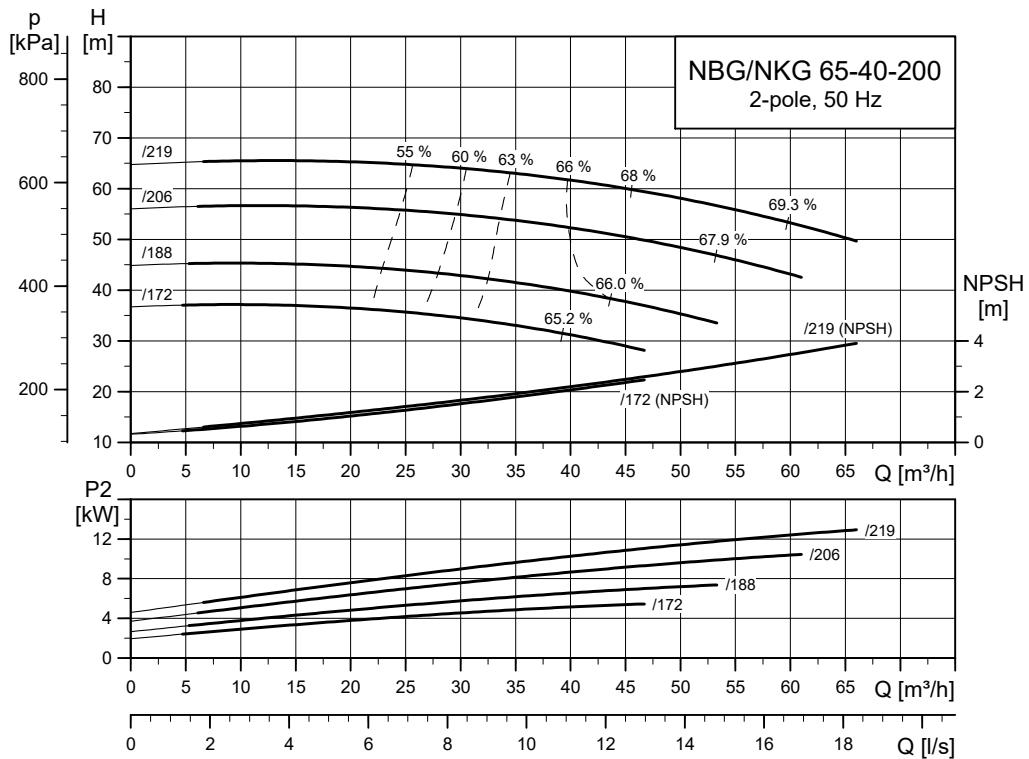
TM034908

NBG, NKG 65-50-125

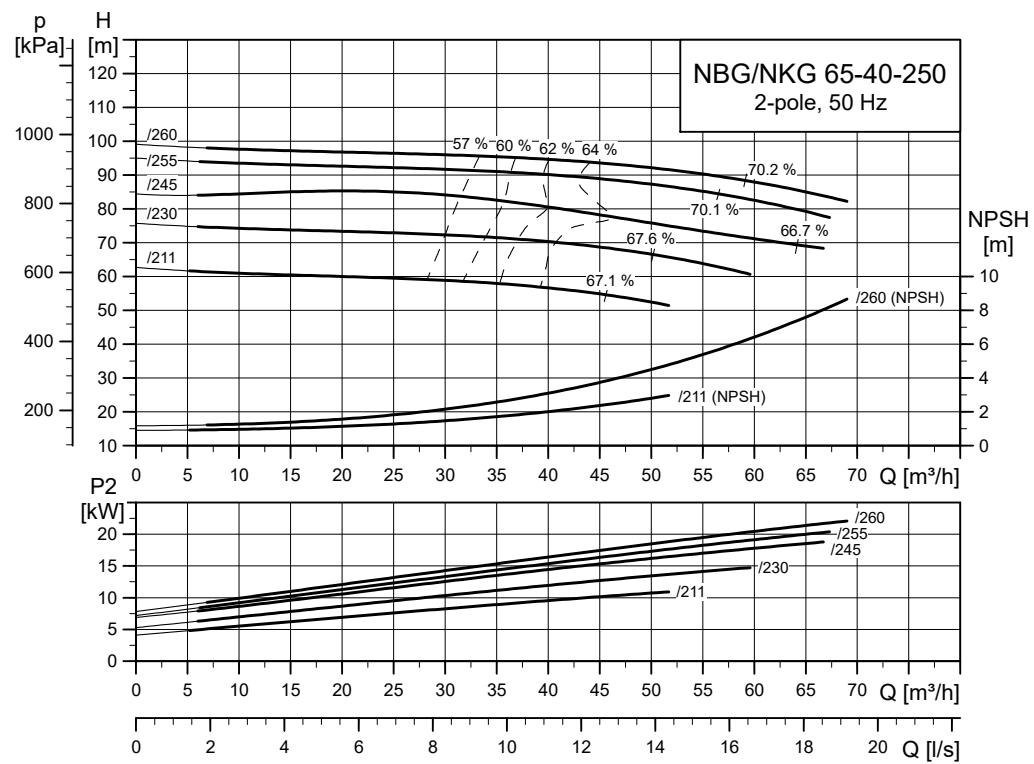
TM034909

NBG, NKG 65-50-160

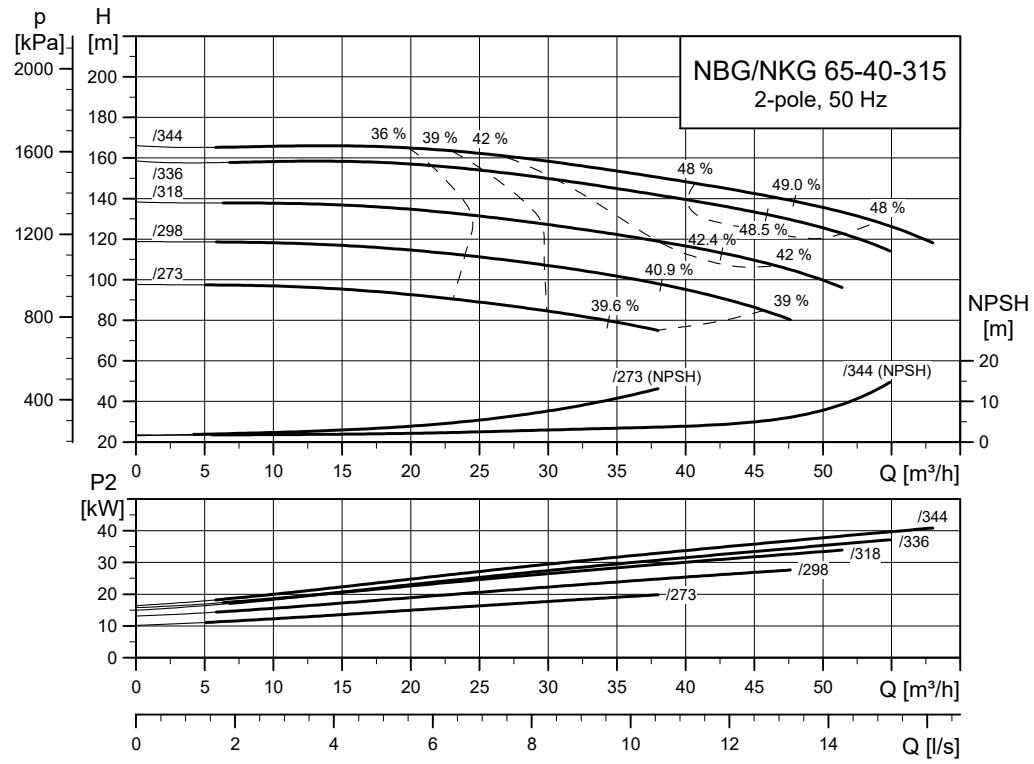
TM034910

NBG, NKG 65-40-200

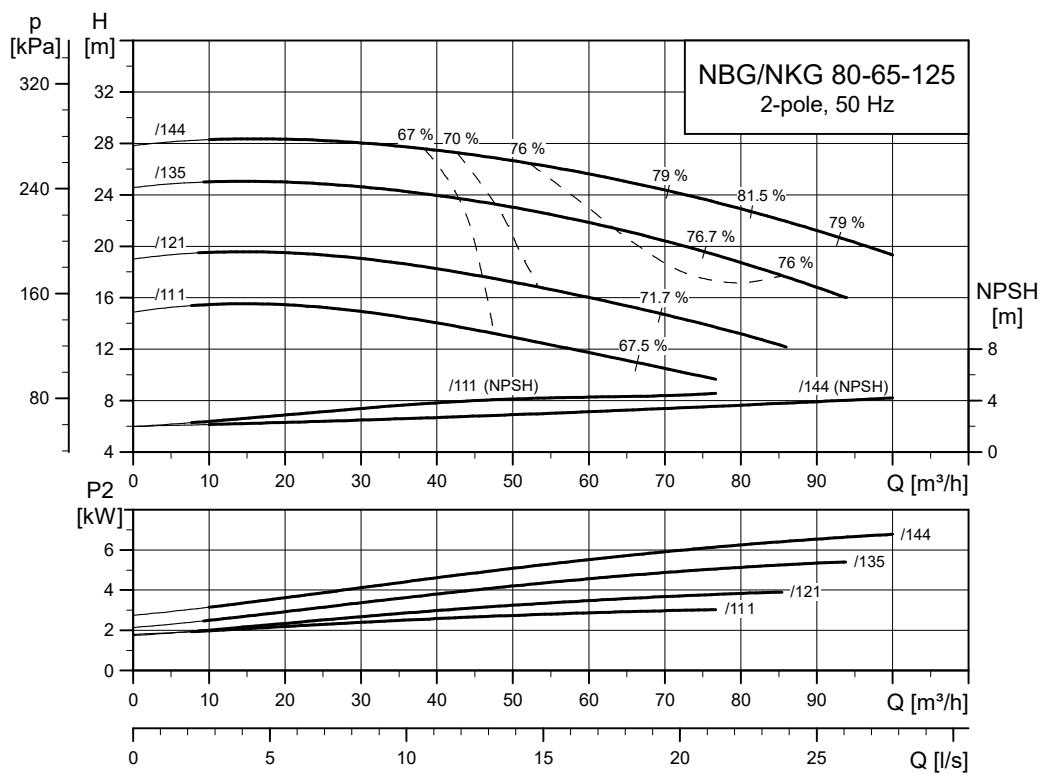
TM034911

NBG, NKG 65-40-250

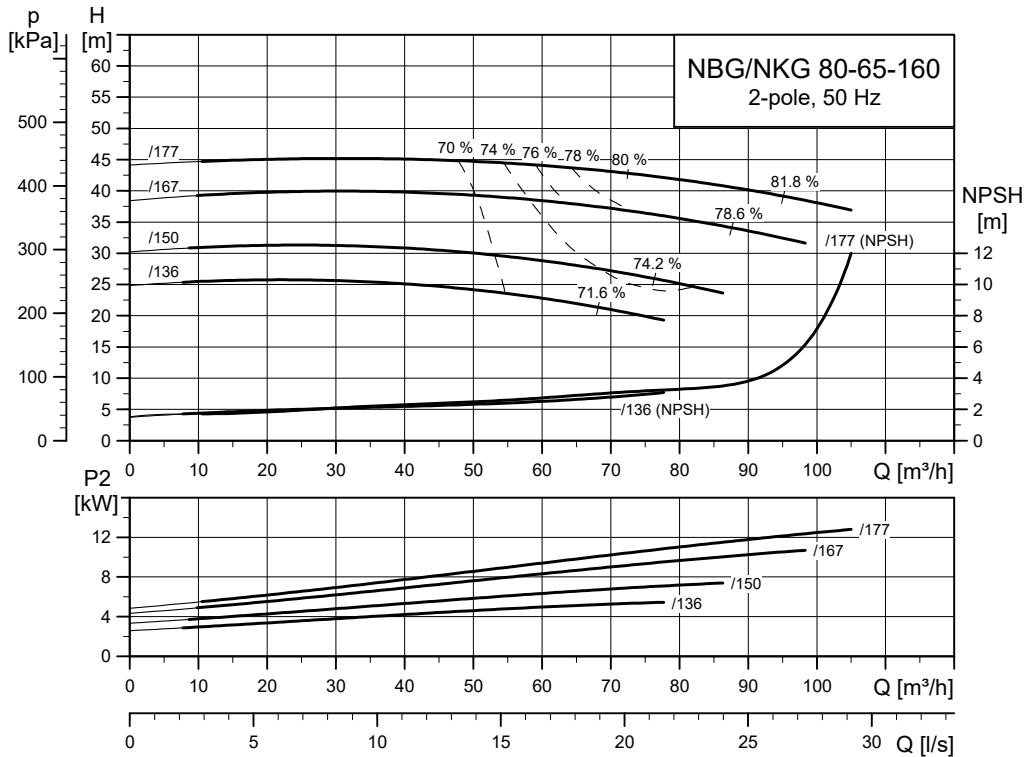
TM034912

NBG, NKG 65-40-315

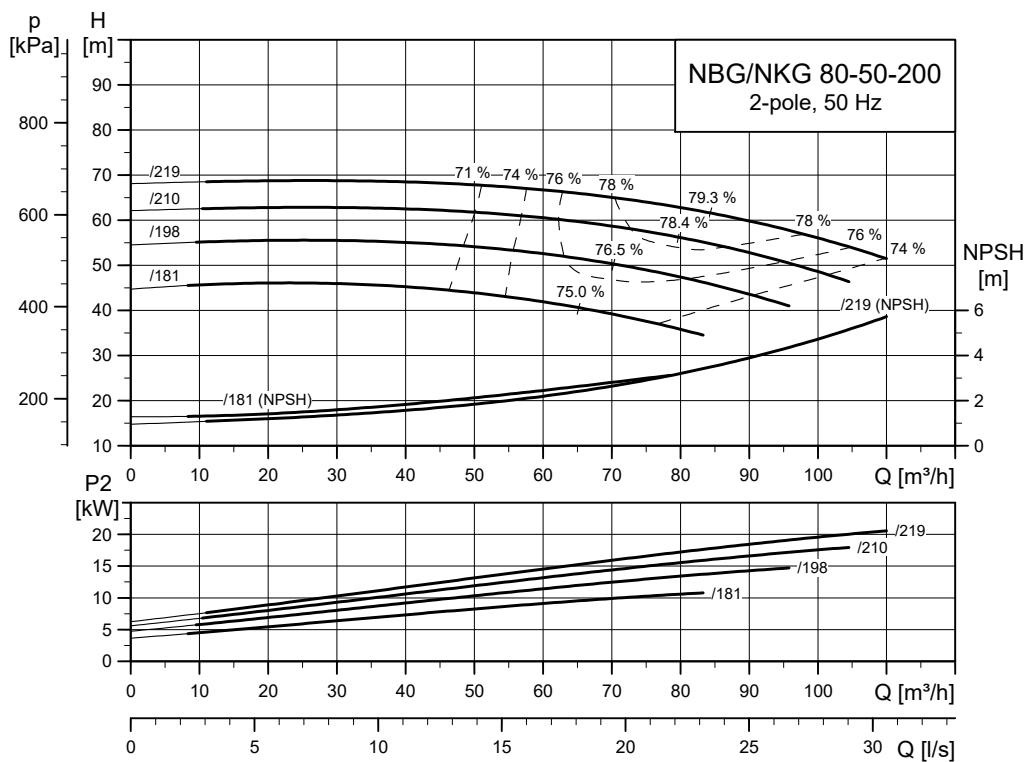
TM034913

NBG, NKG 80-65-125

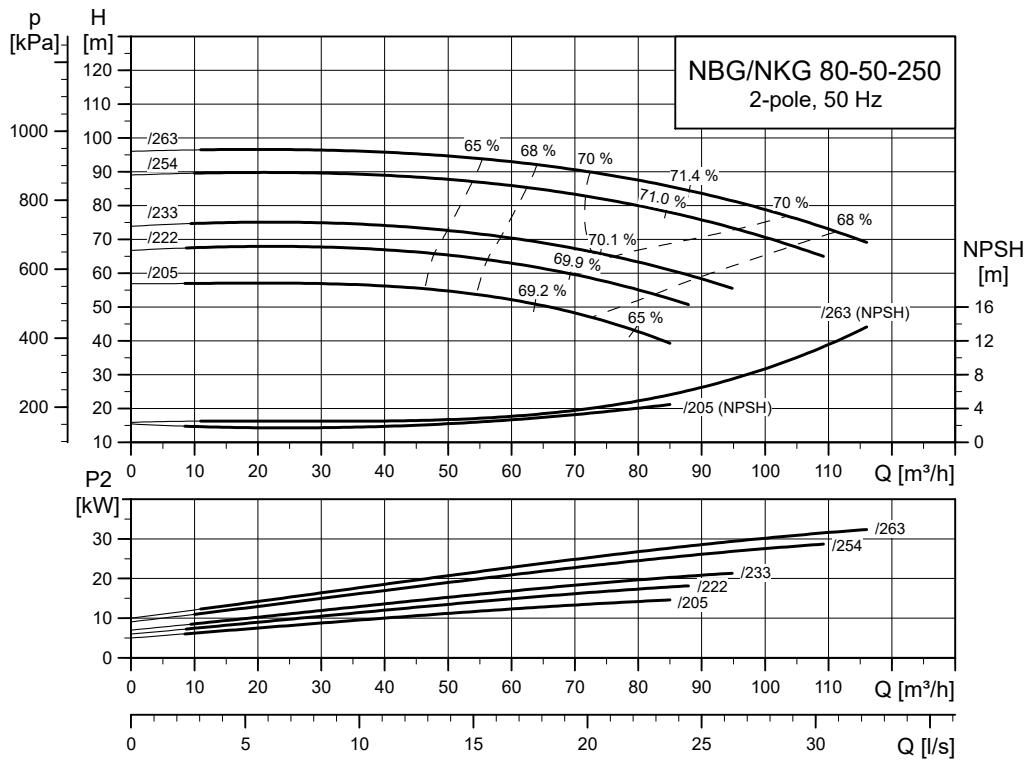
TM034914

NBG, NKG 80-65-160

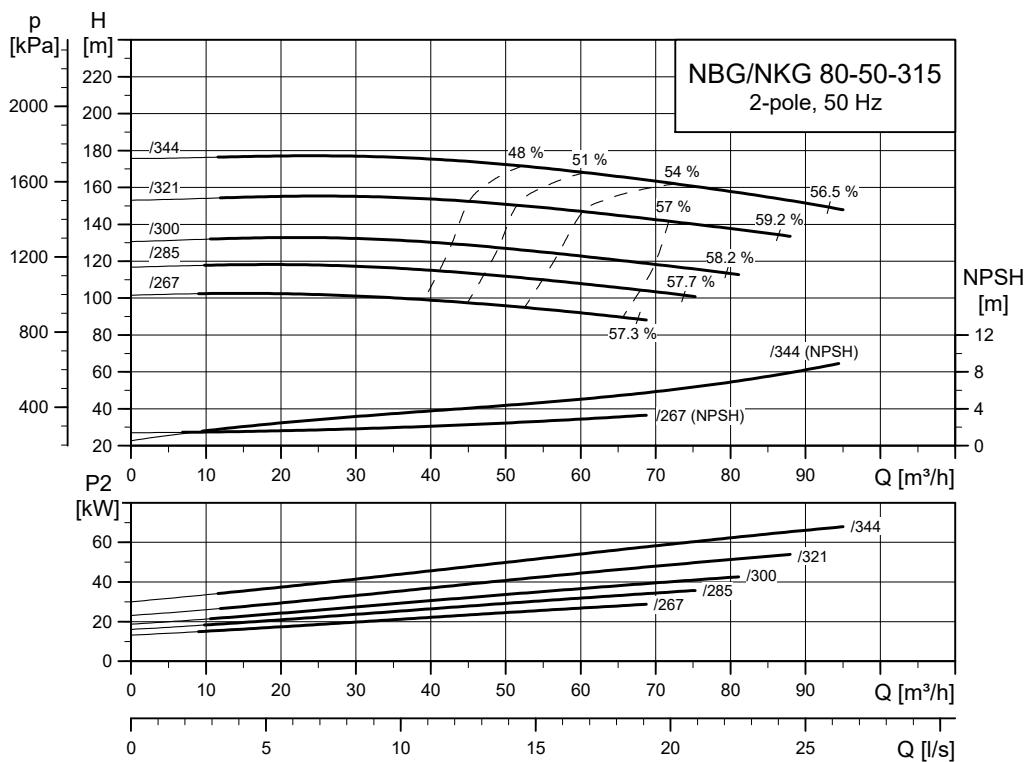
TM034915

NBG, NKG 80-50-200

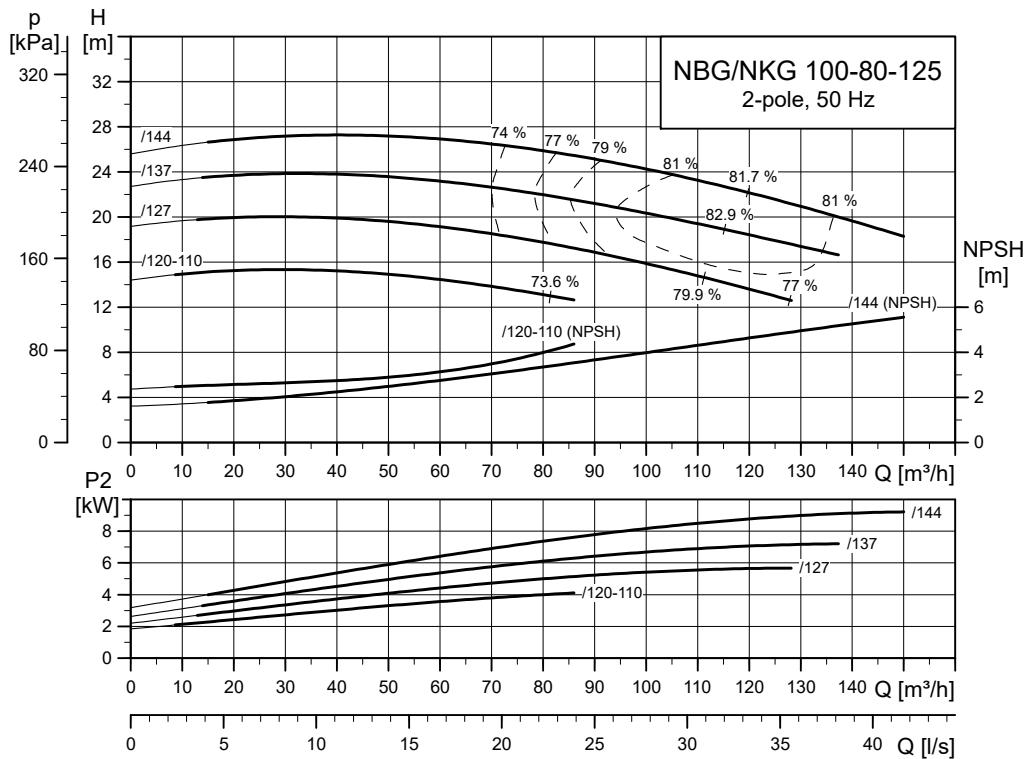
TM034916

NBG, NKG 80-50-250

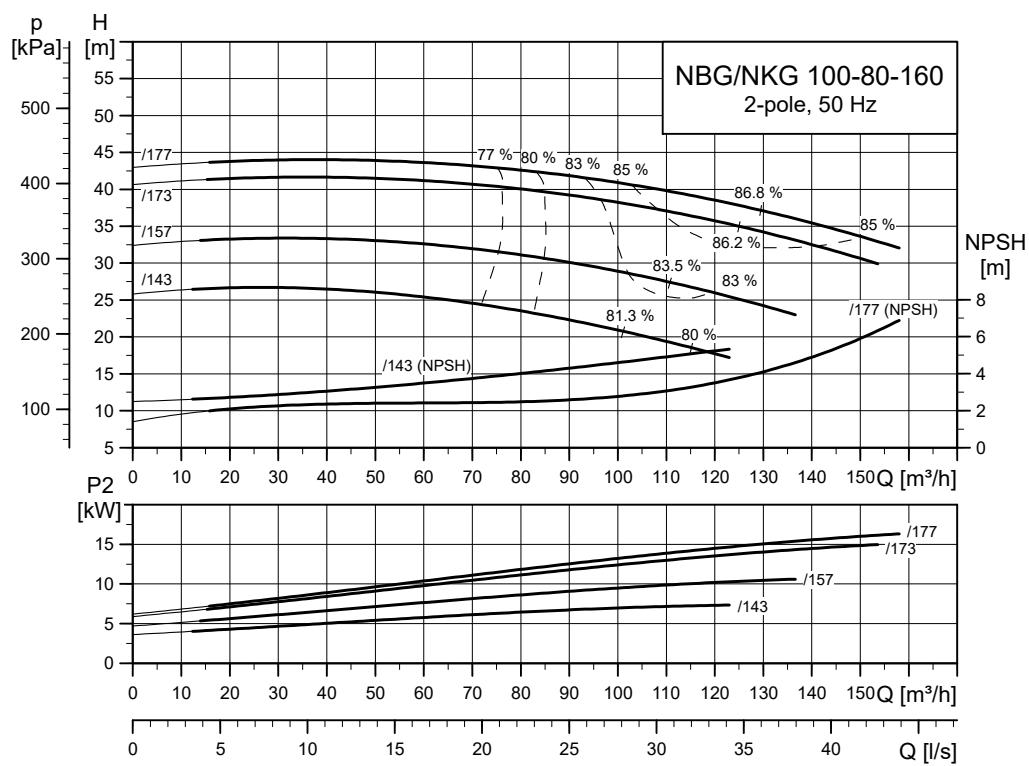
TM034917

NBG, NKG 80-50-315

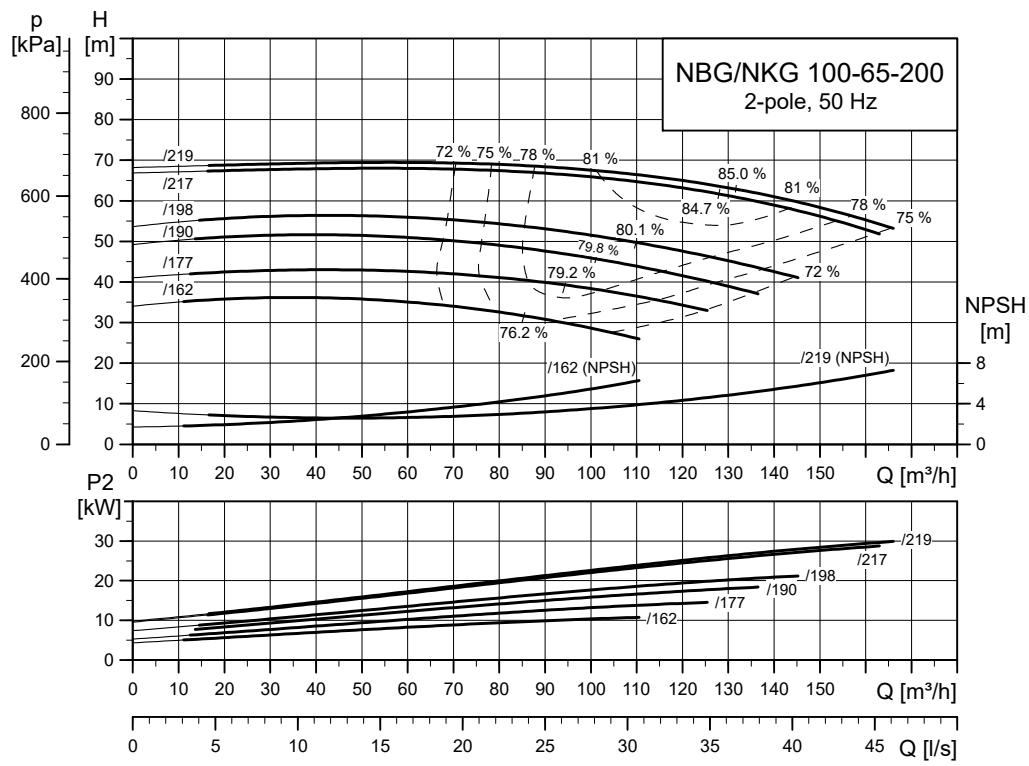
TM034918

NBG, NKG 100-80-125

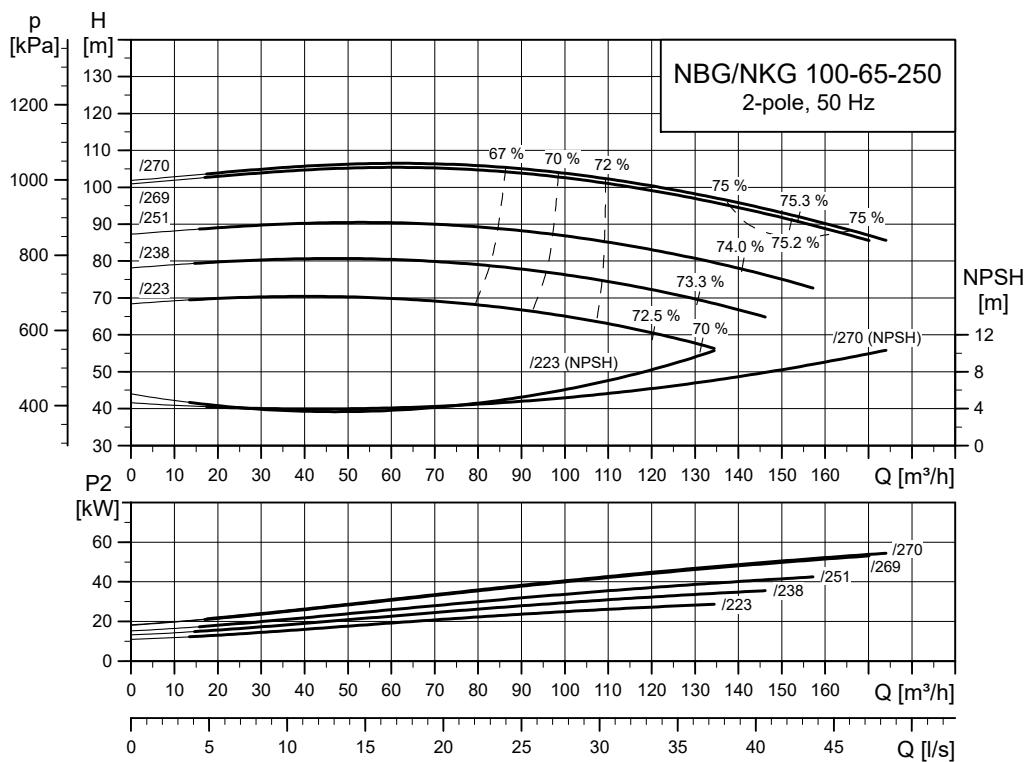
TM034919

NBG, NKG 100-80-160

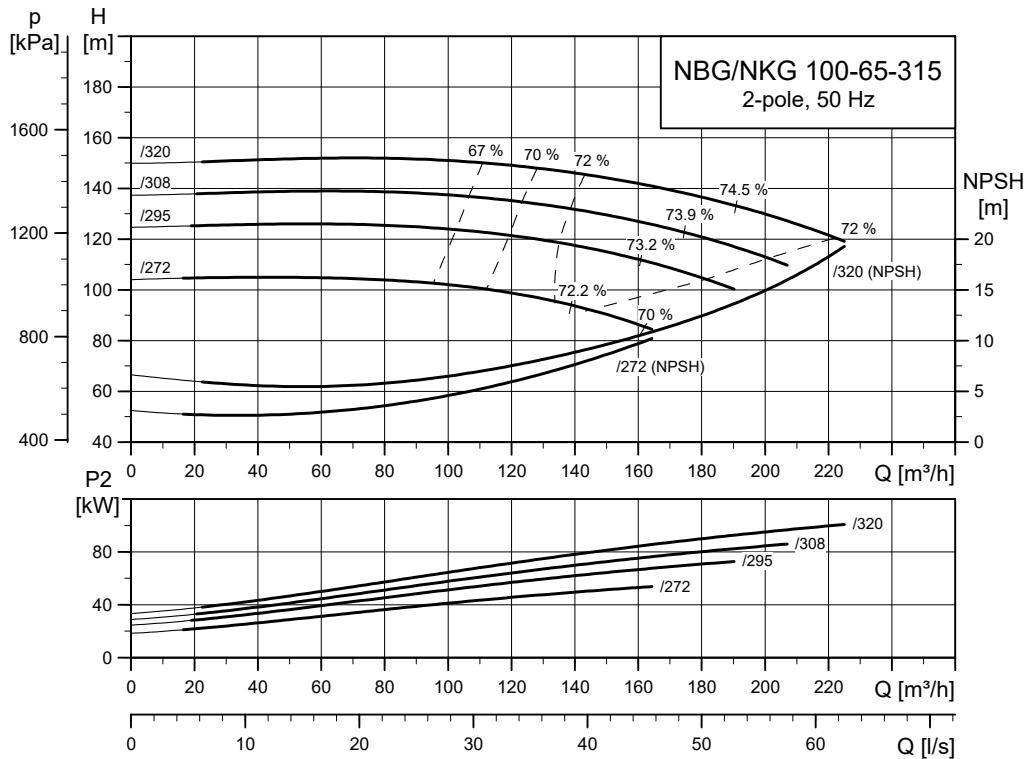
TM034920

NBG, NKG 100-65-200

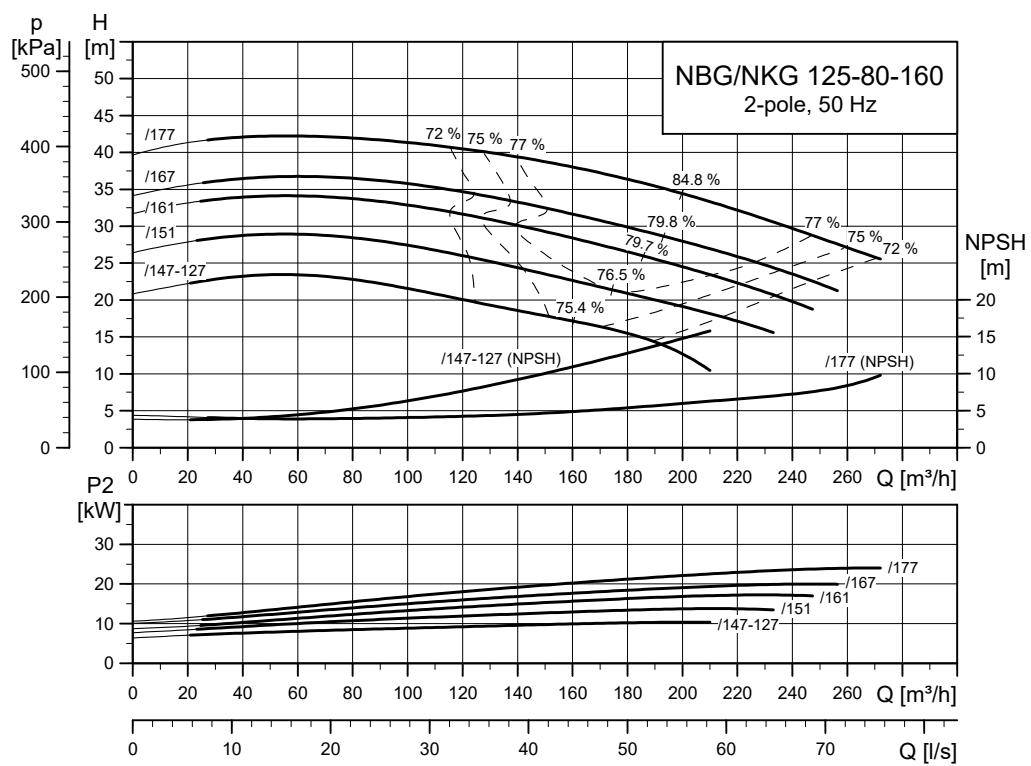
TM034921

NBG, NKG 100-65-250

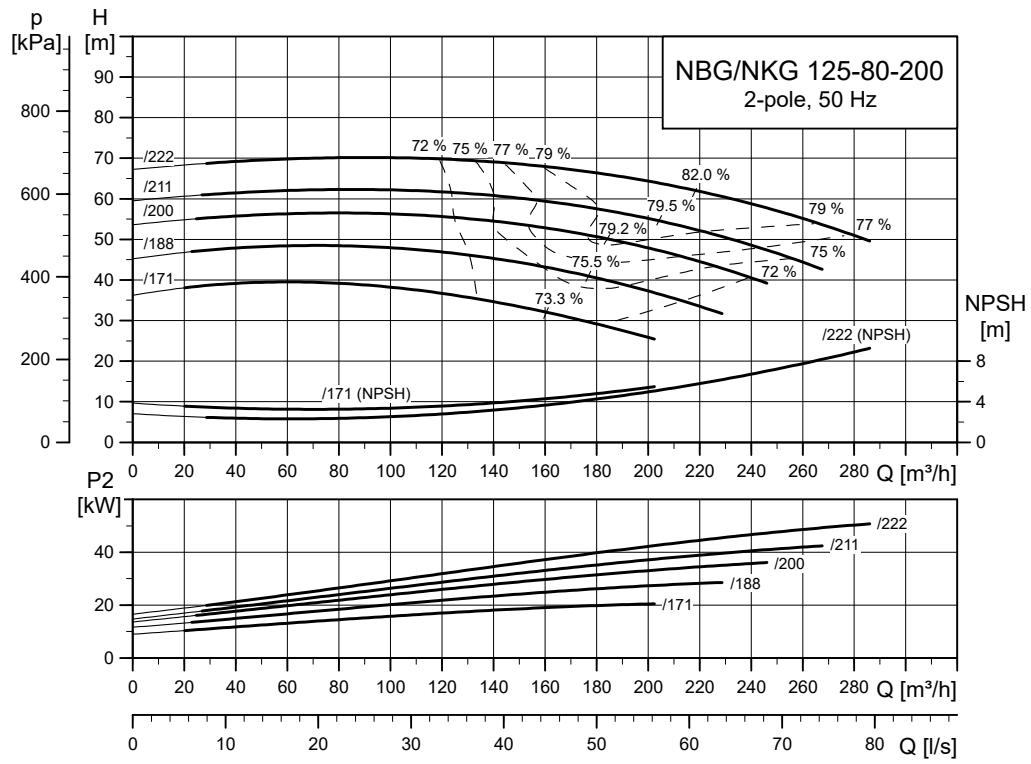
TM034922

NBG, NKG 100-65-315

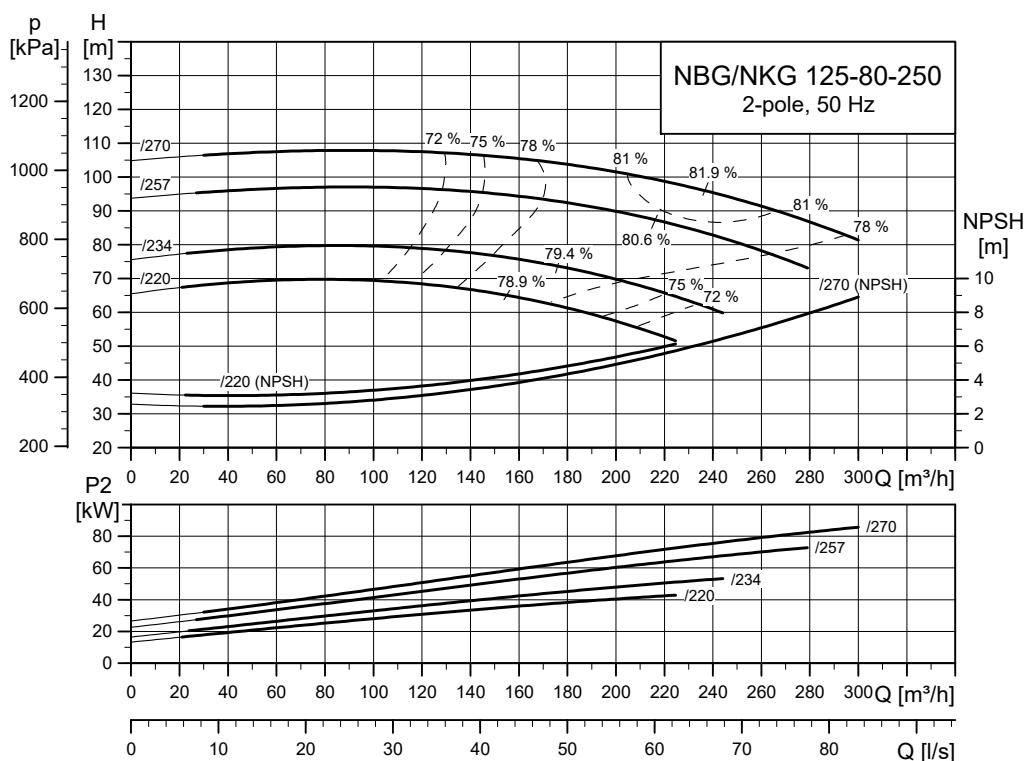
TM034923

NBG, NKG 125-80-160

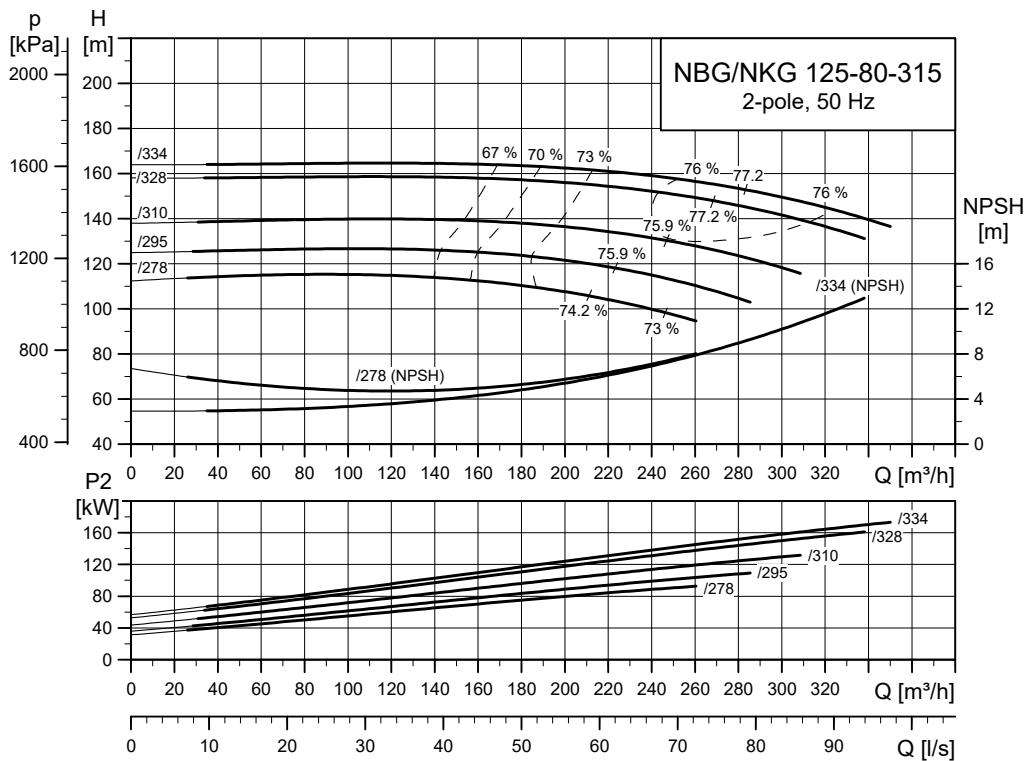
TM034924

NBG, NKG 125-80-200

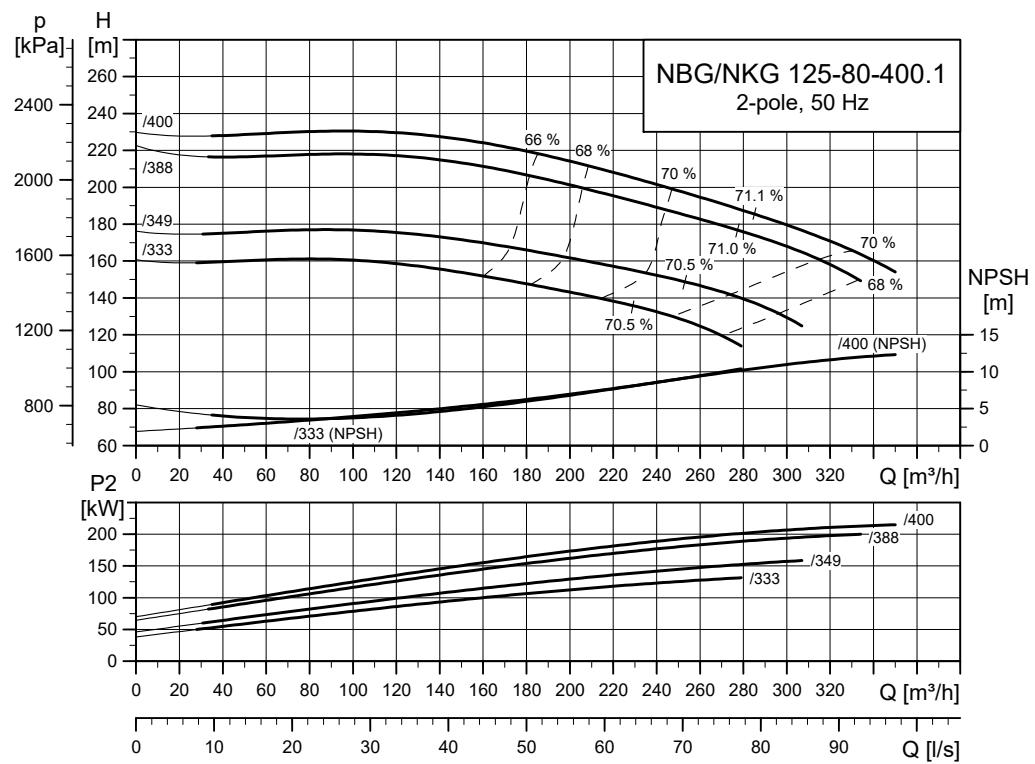
TM034925

NBG, NKG 125-80-250

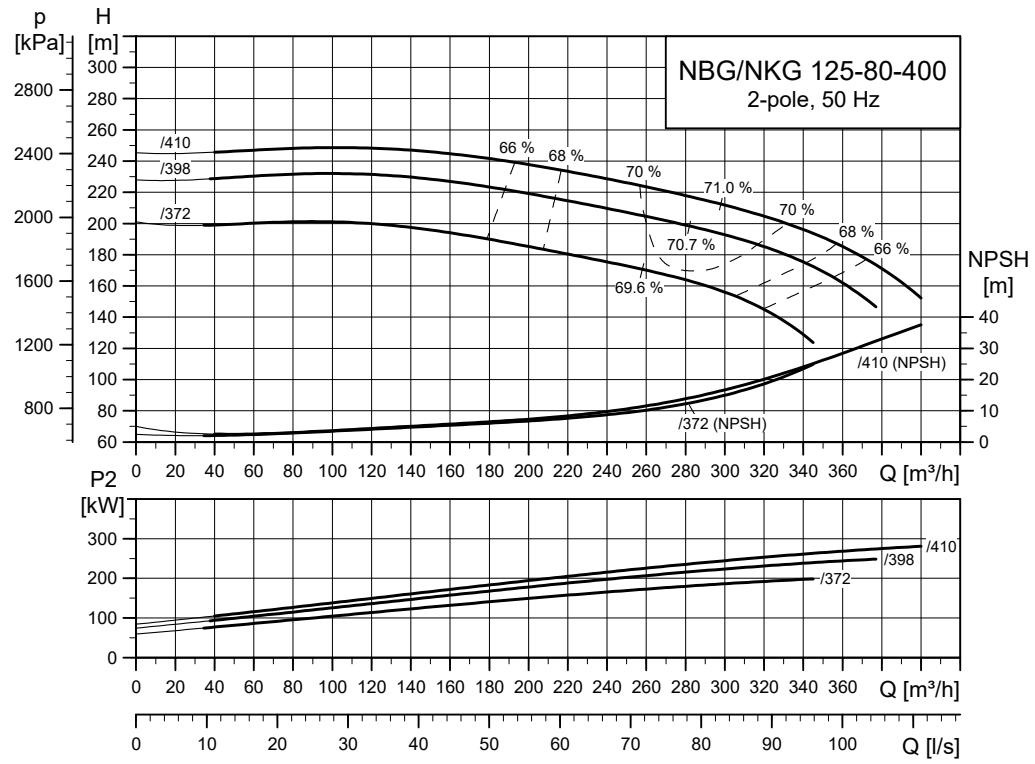
TM034926

NBG, NKG 125-80-315

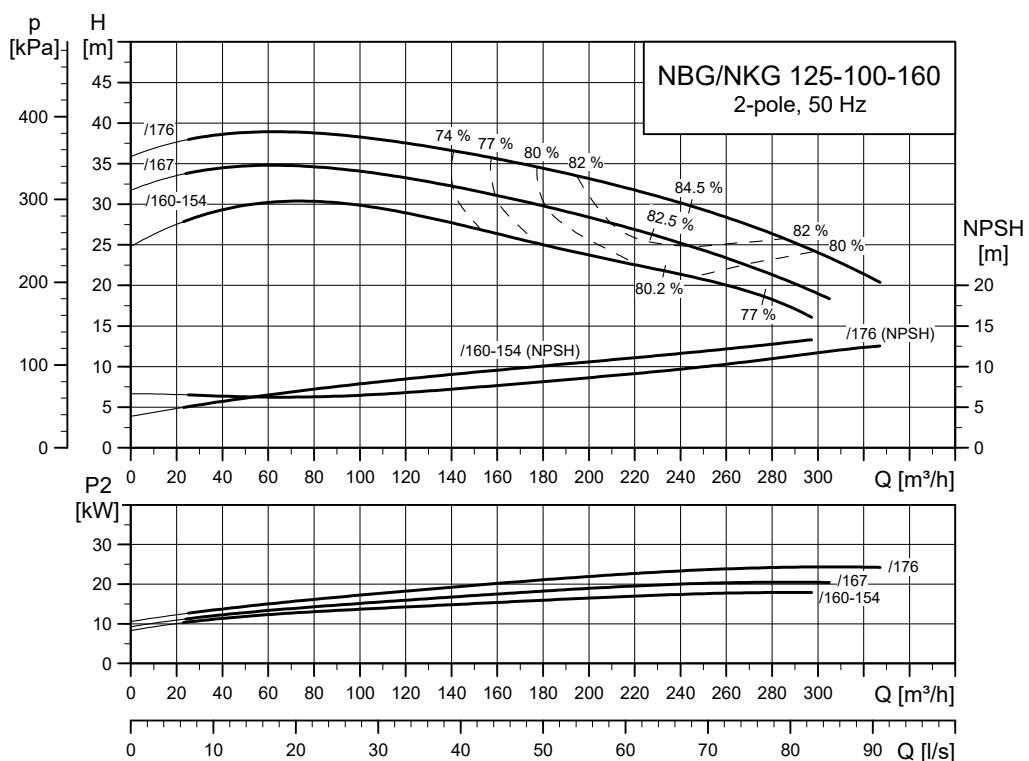
TM034927

NBG, NKG 125-80-400.1

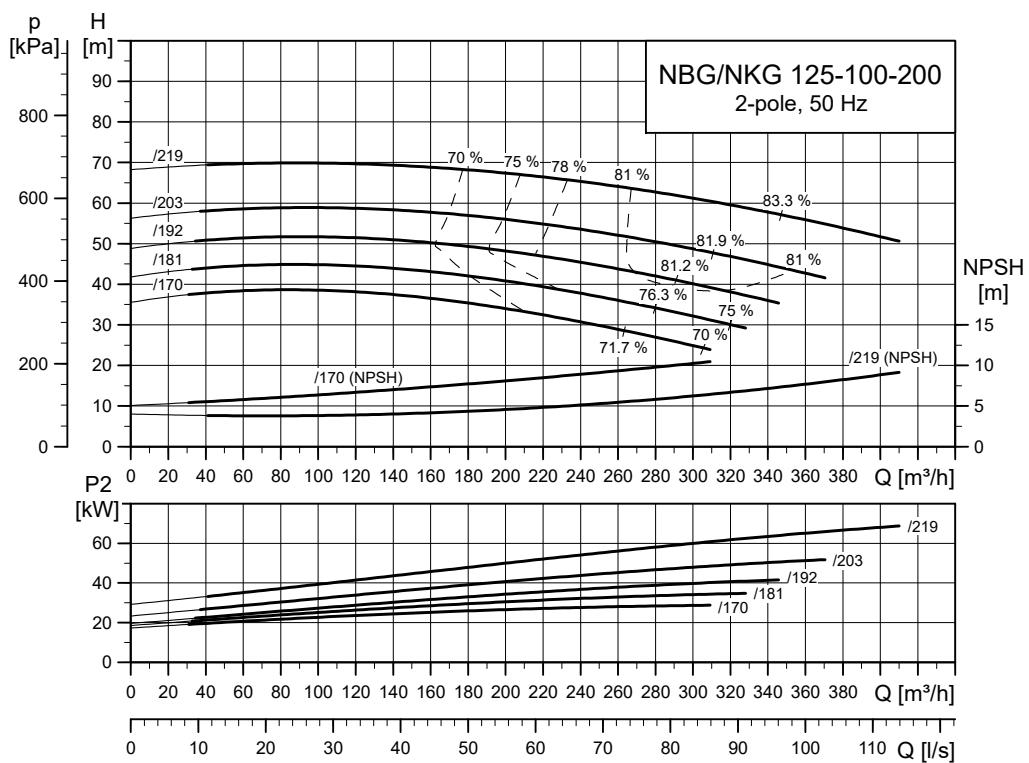
TM056041

NBG, NKG 125-80-400

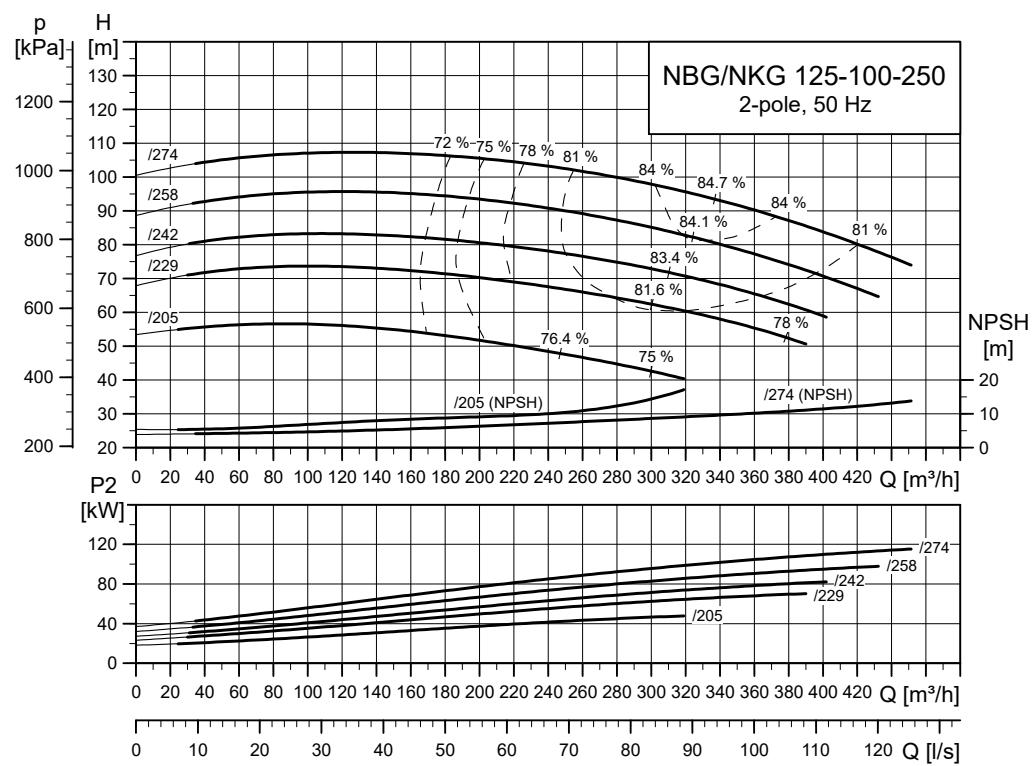
TM056043

NBG, NKG 125-100-160

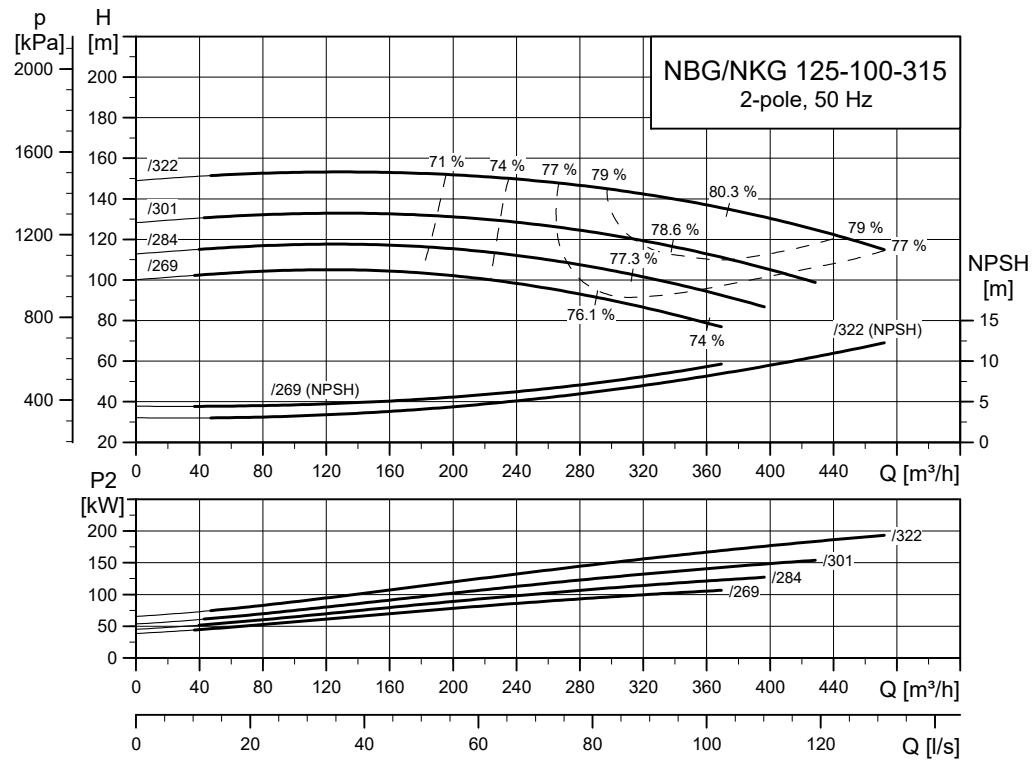
TM034928

NBG, NKG 125-100-200

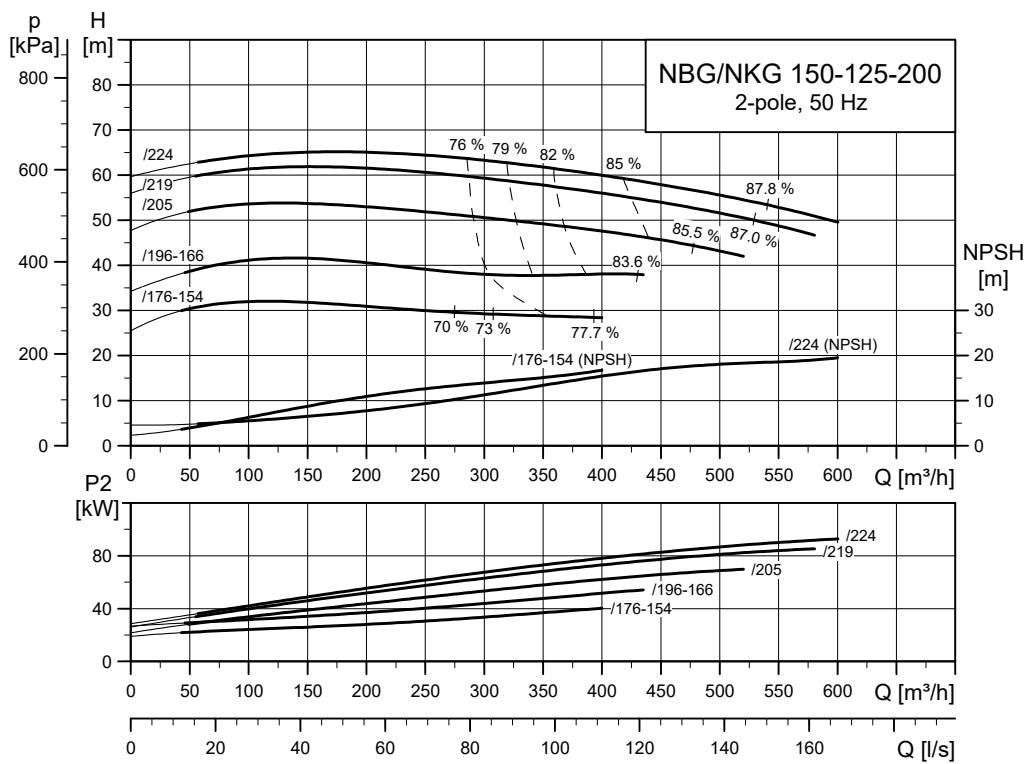
TM034929

NBG, NKG 125-100-250

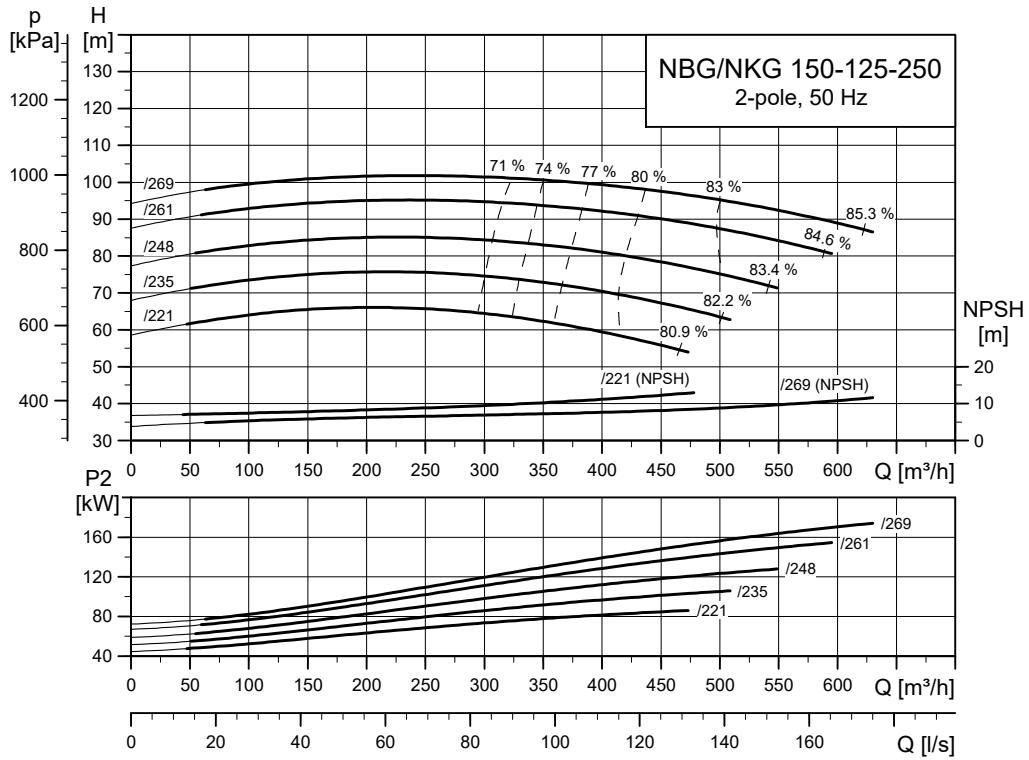
TM034930

NBG, NKG 125-100-315

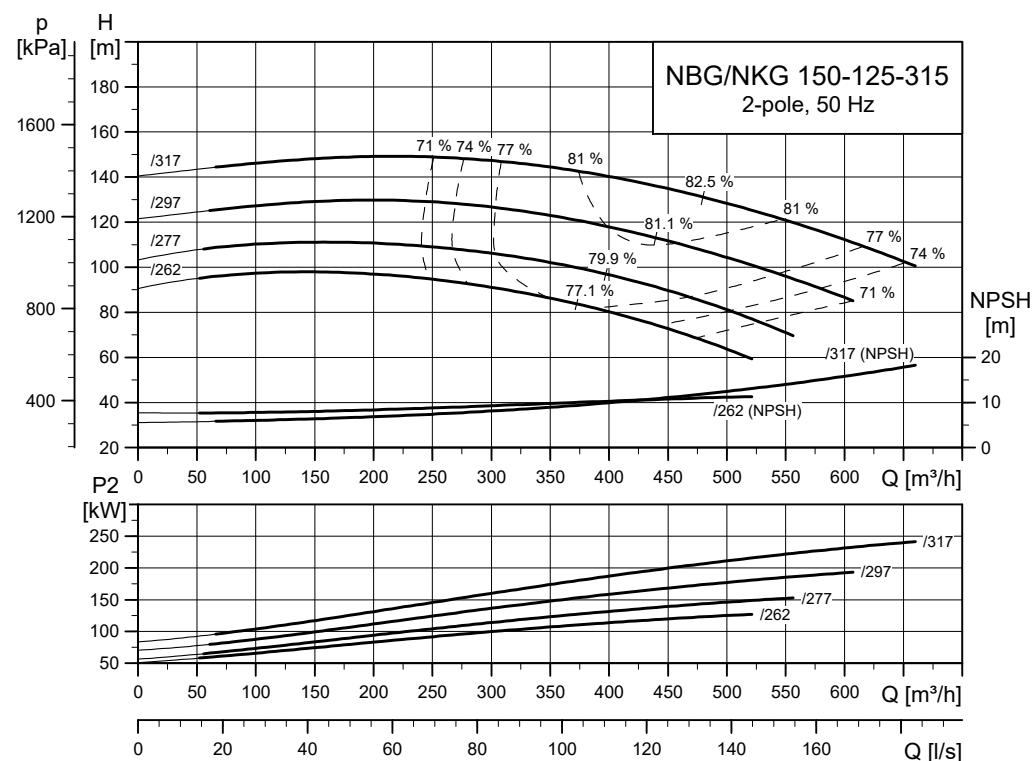
TM034931

NBG, NKG 150-125-200

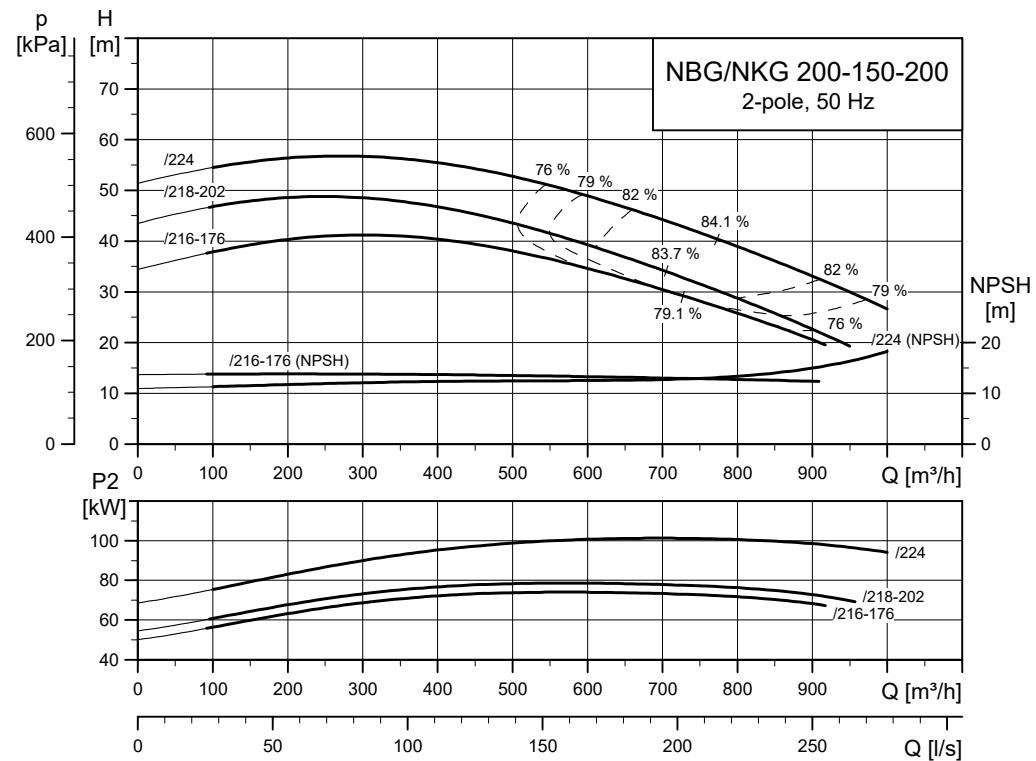
TM034932

NBG, NKG 150-125-250

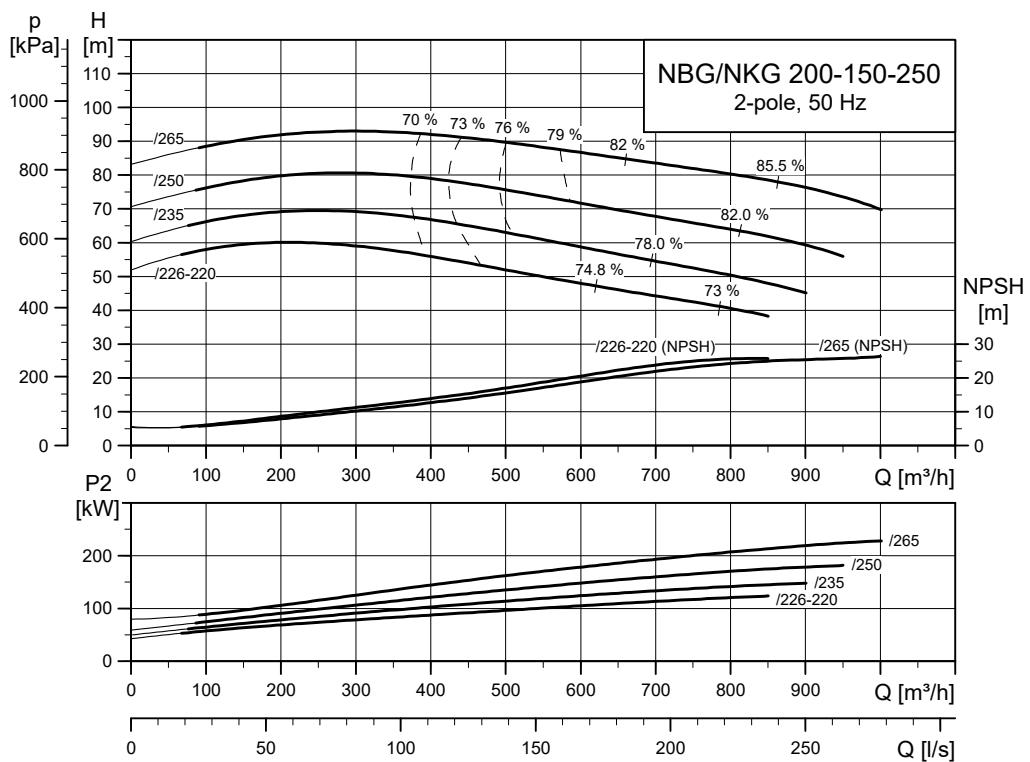
TM034933

NBG, NKG 150-125-315

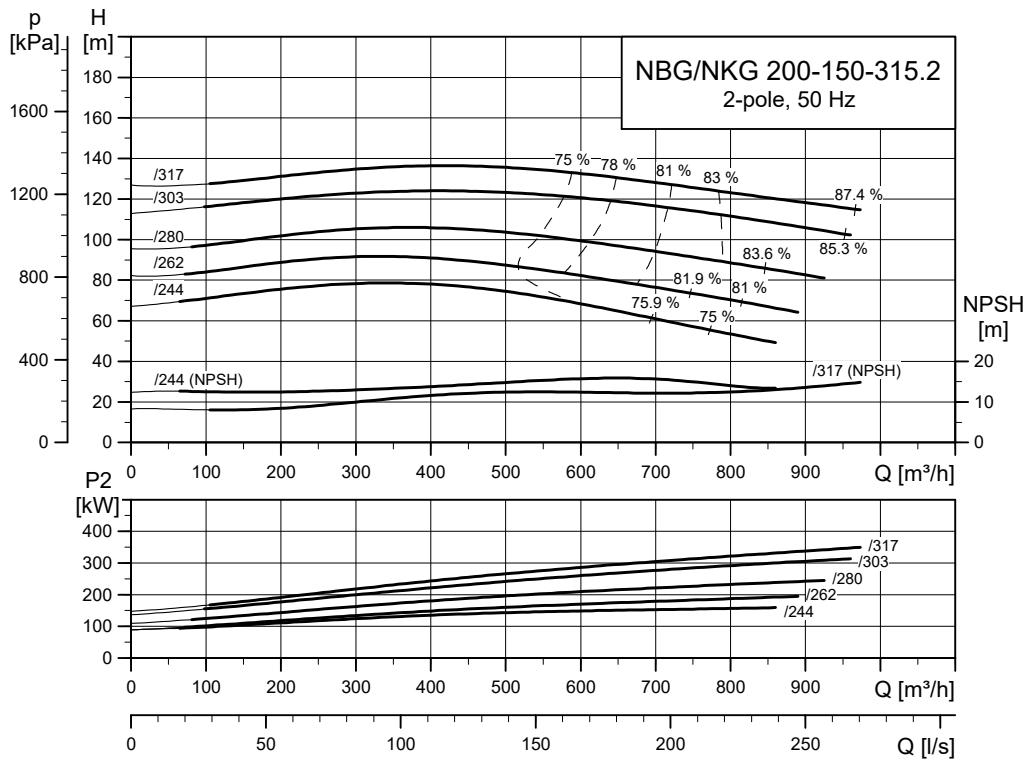
TM034934

NBG, NKG 200-150-200

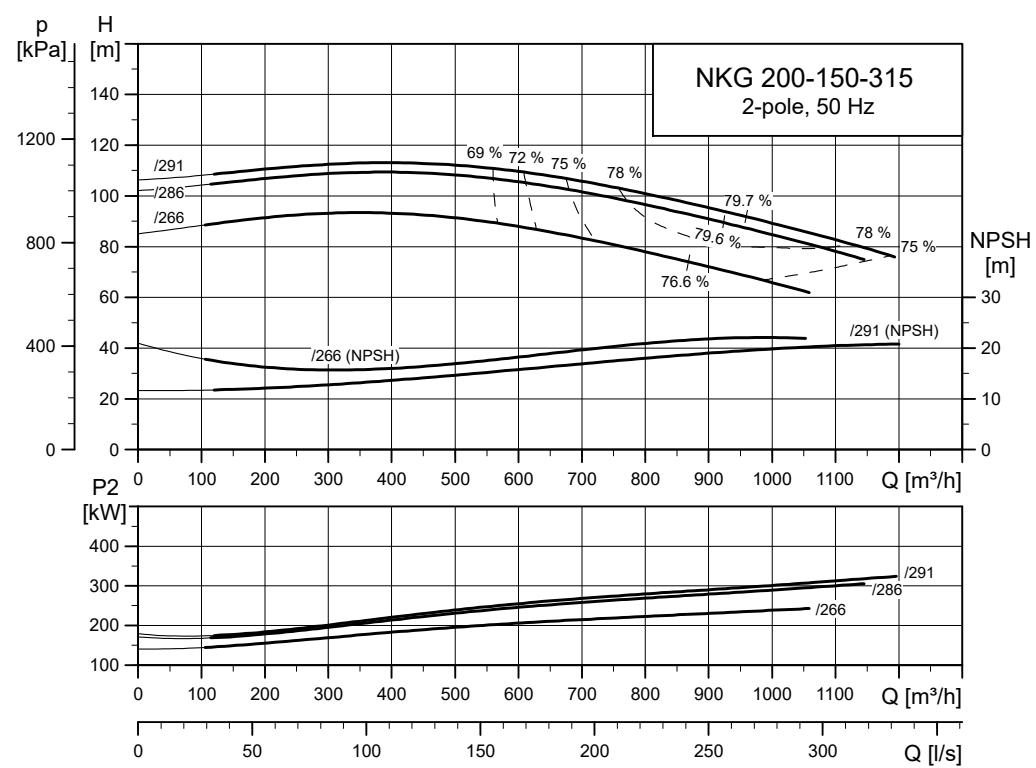
TM034935

NBG, NKG 200-150-250

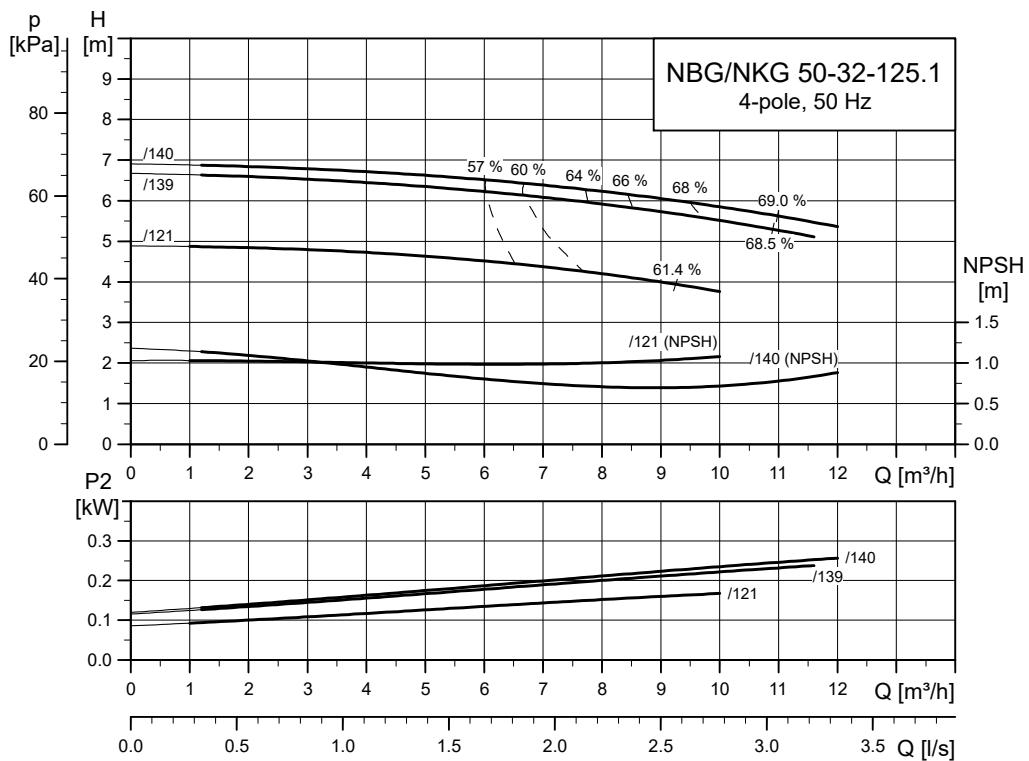
TM034936

NBG, NKG 200-150-315.2

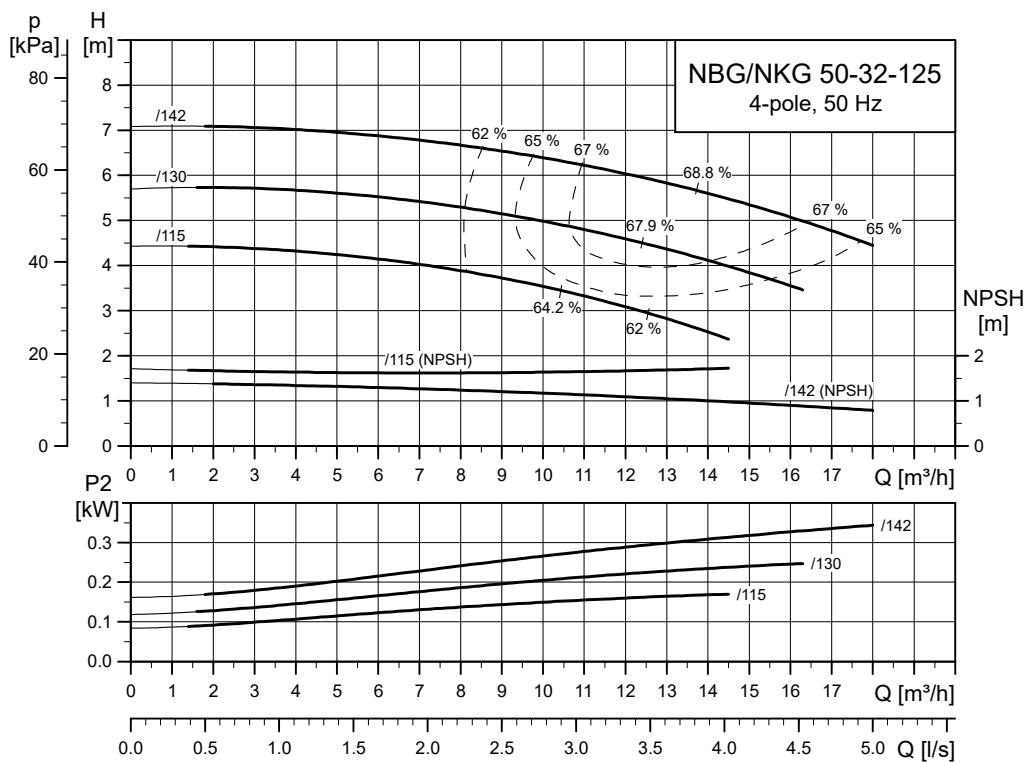
TM064755

NKG 200-150-315

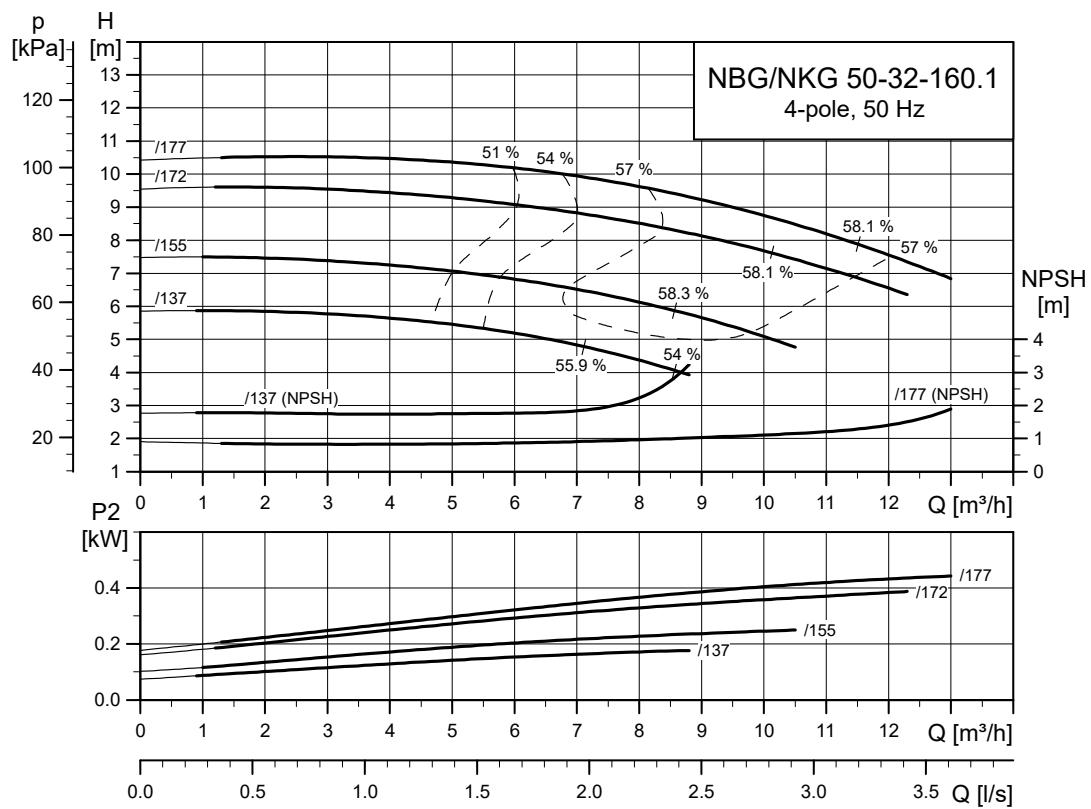
TM034937

4-pole**NBG, NKG 50-32-125.1**

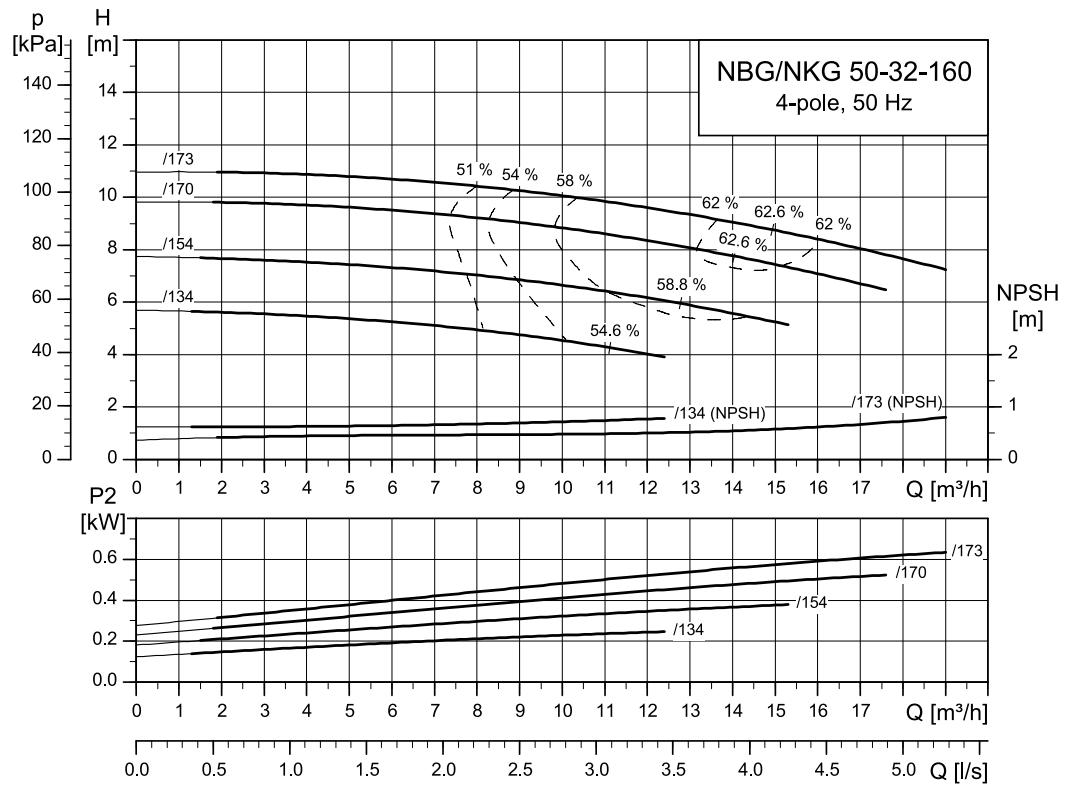
TM034938

NBG, NKG 50-32-125

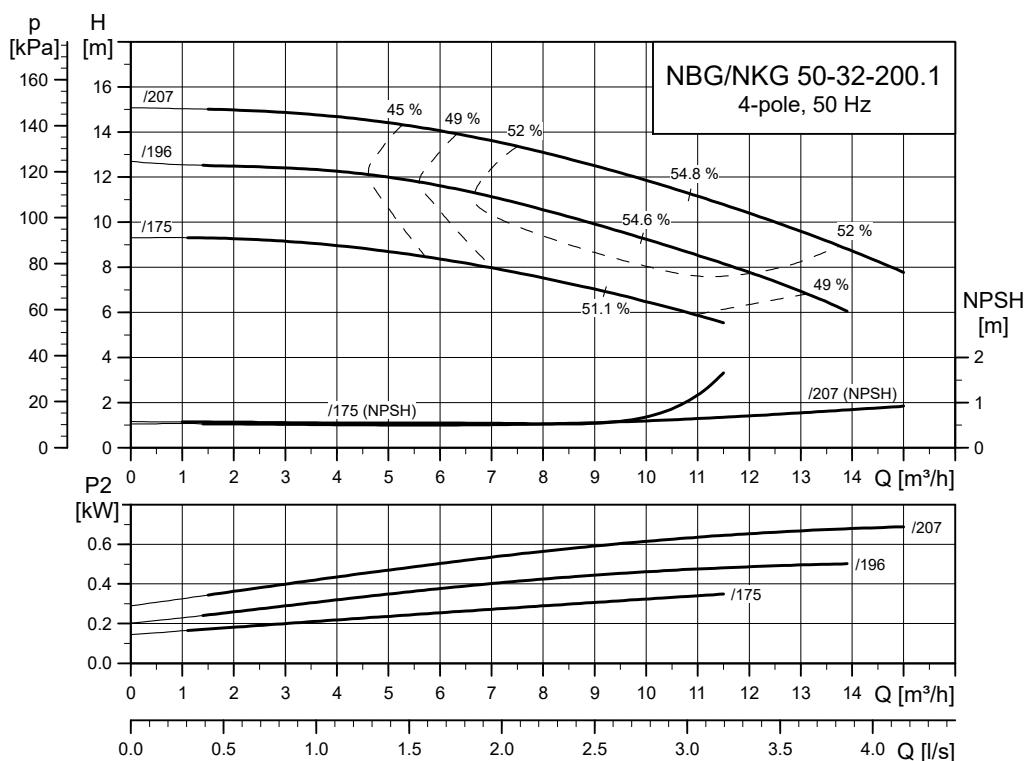
TM034941

NBG, NKG 50-32-160.1

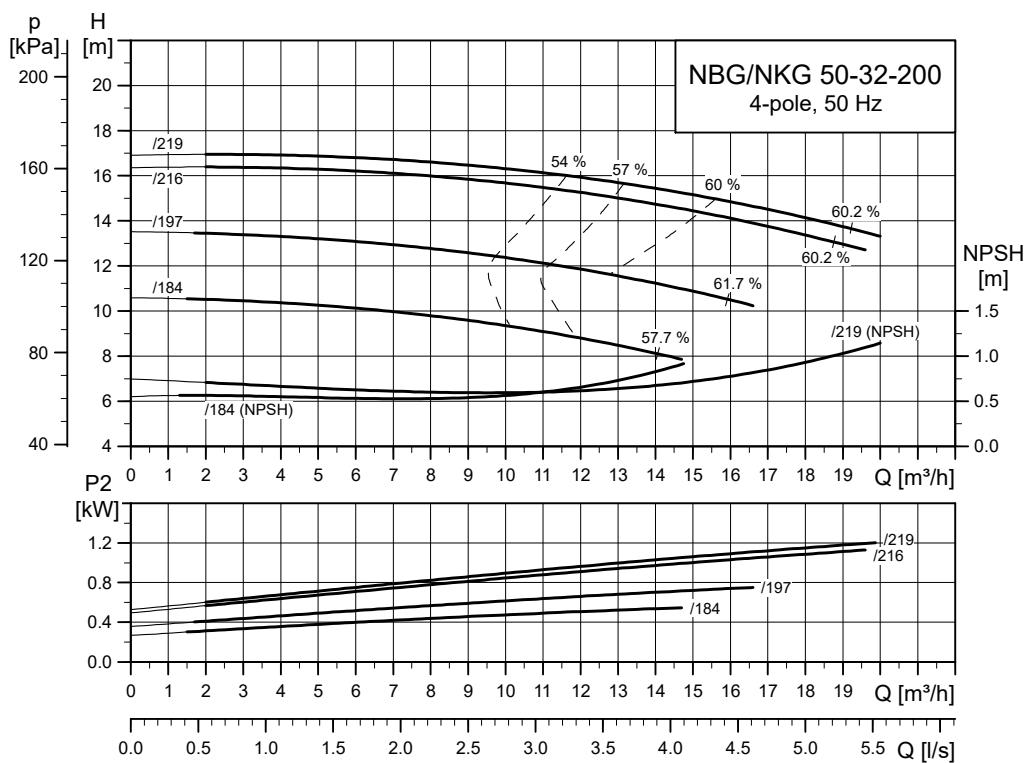
TM034939

NBG, NKG 50-32-160

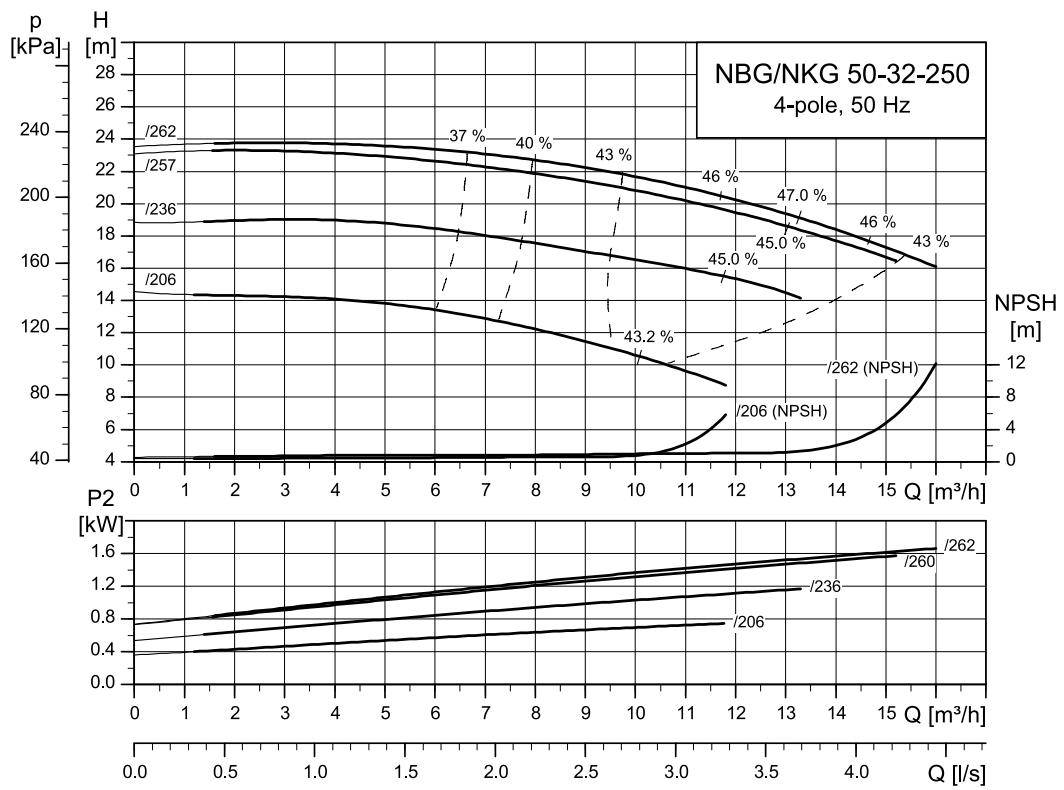
TM034942

NBG, NKG 50-32-200.1

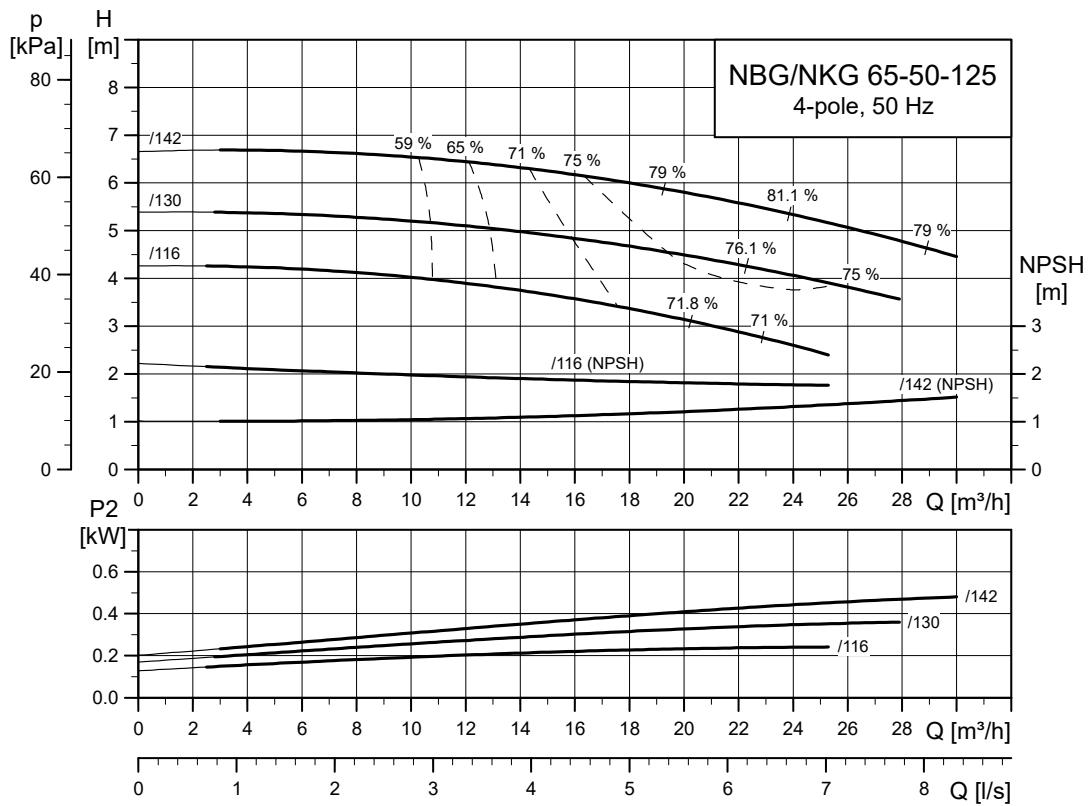
TM034940

NBG, NKG 50-32-200

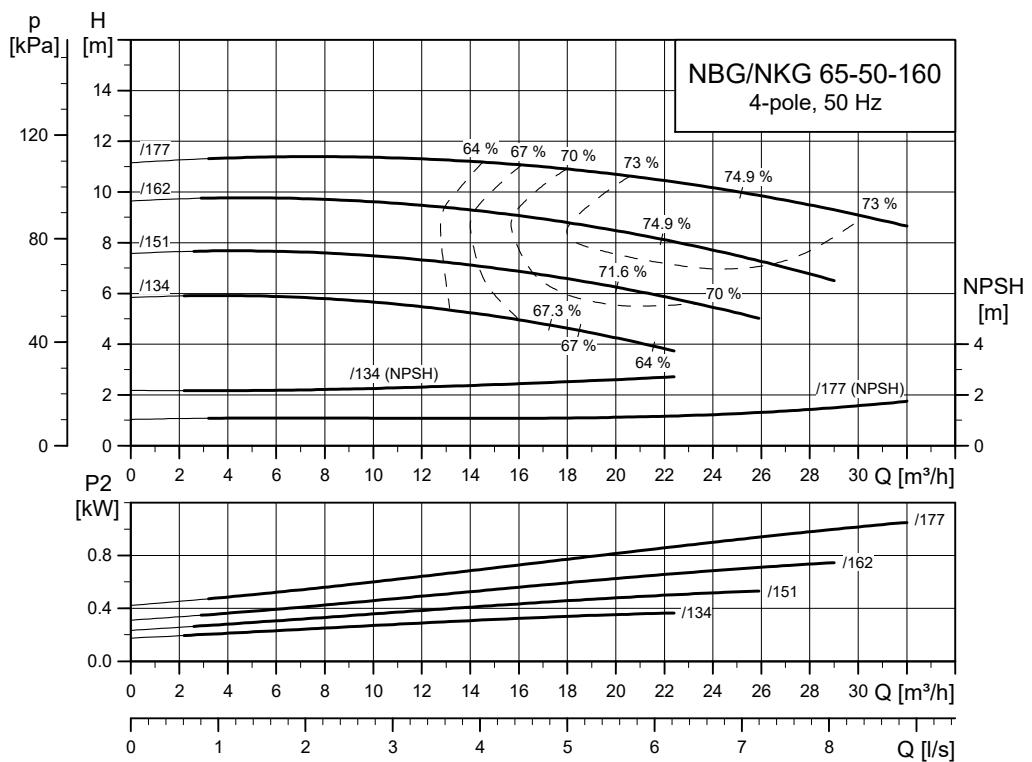
TM034943

NBG, NKG 50-32-250

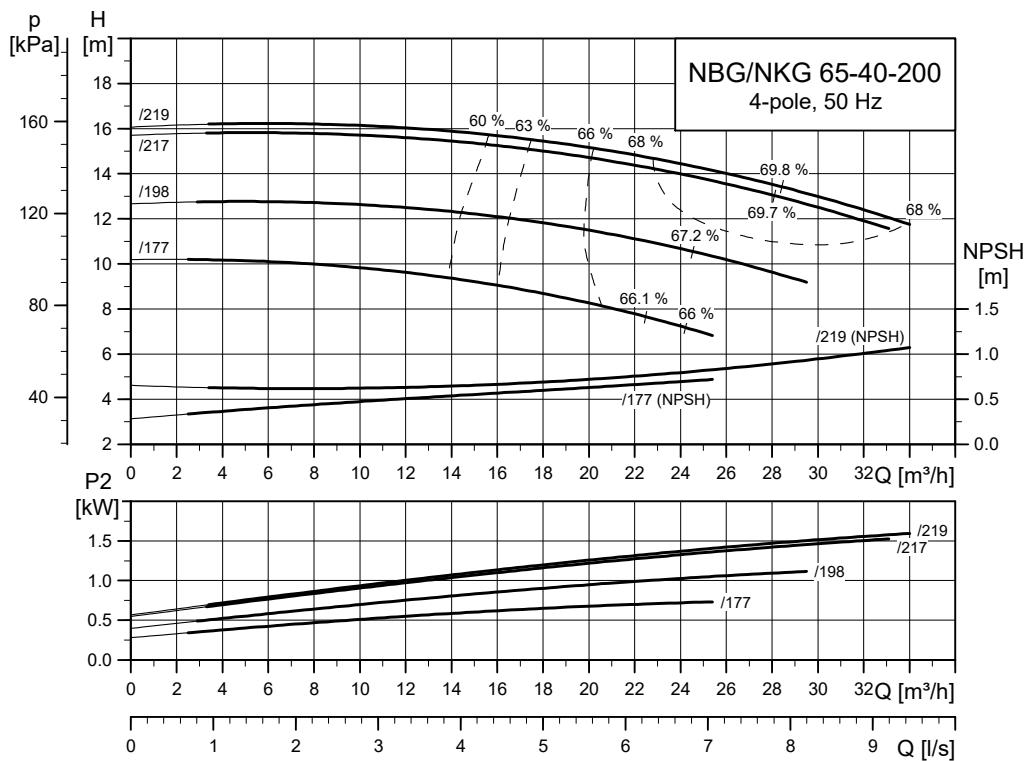
TM034944

NBG, NKG 65-50-125

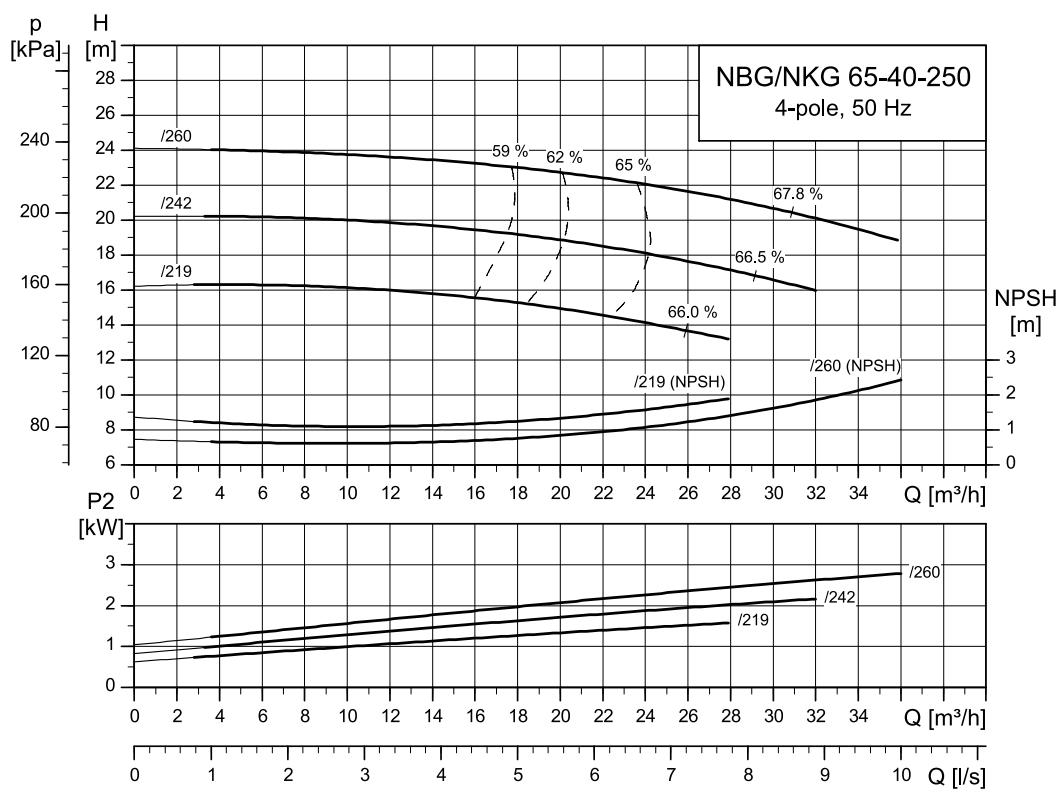
TM034945

NBG, NKG 65-50-160

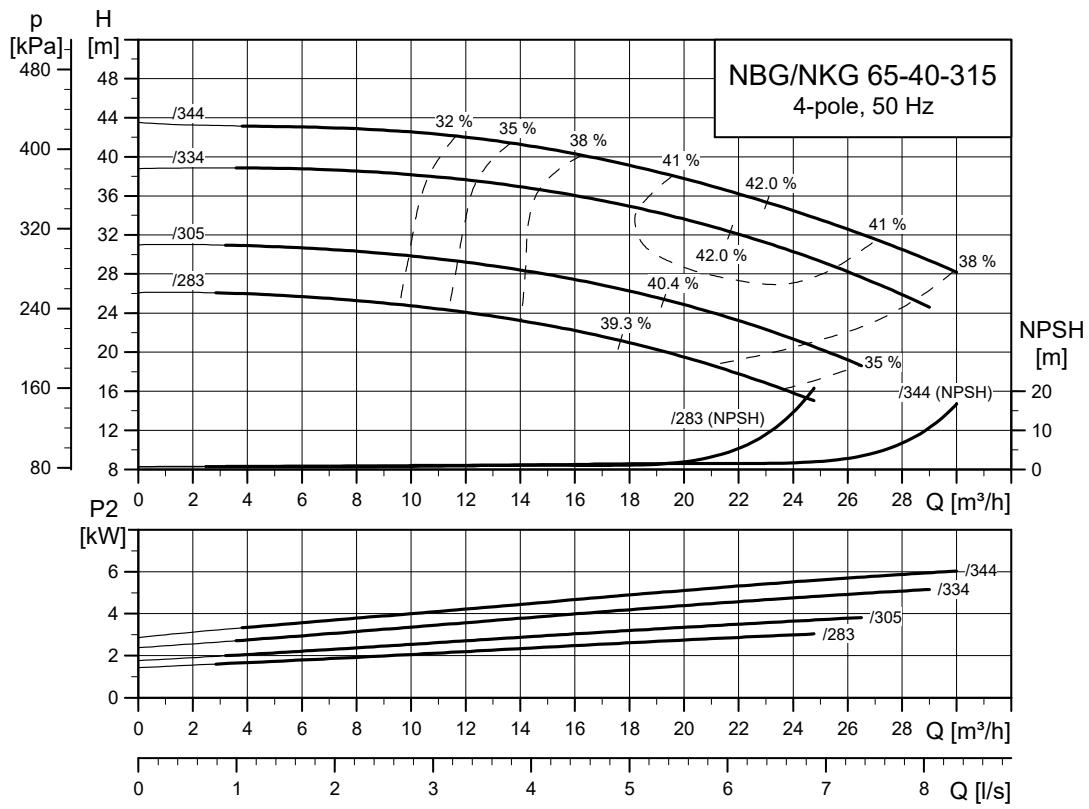
TM034946

NBG, NKG 65-40-200

TM034947

NBG, NKG 65-40-250

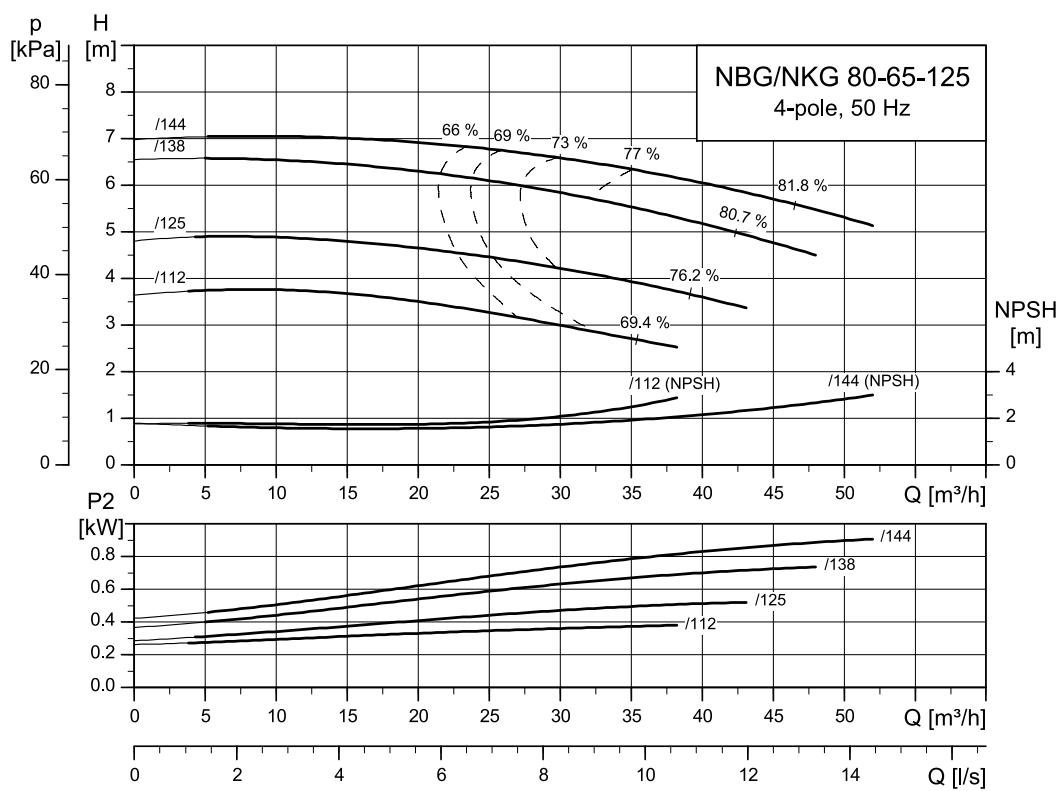
TM034948

NBG, NKG 65-40-315

TM034949

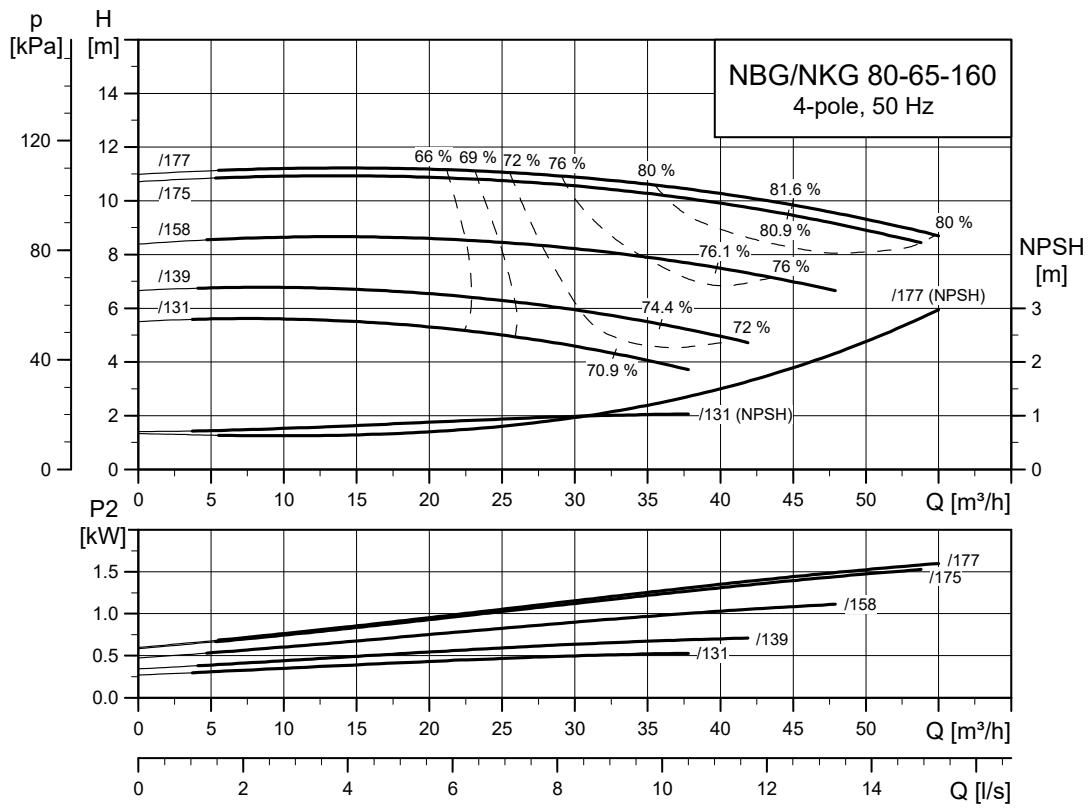
NBG, NBGE, NKG, NKGE

NBG, NKG 80-65-125

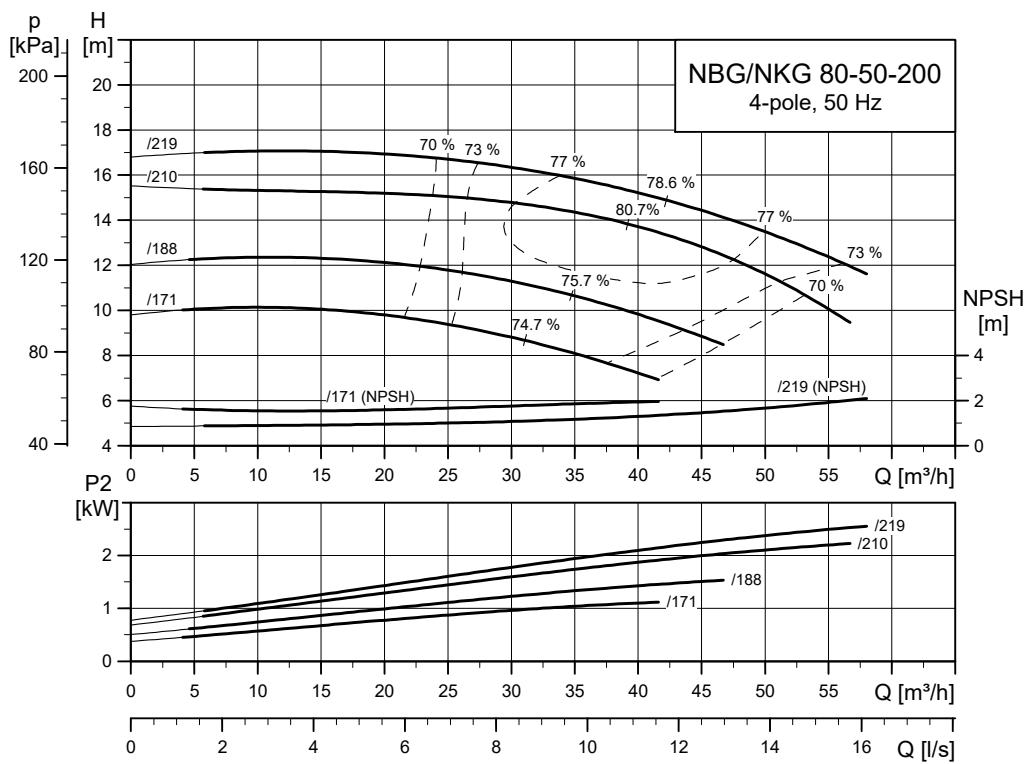


TM034950

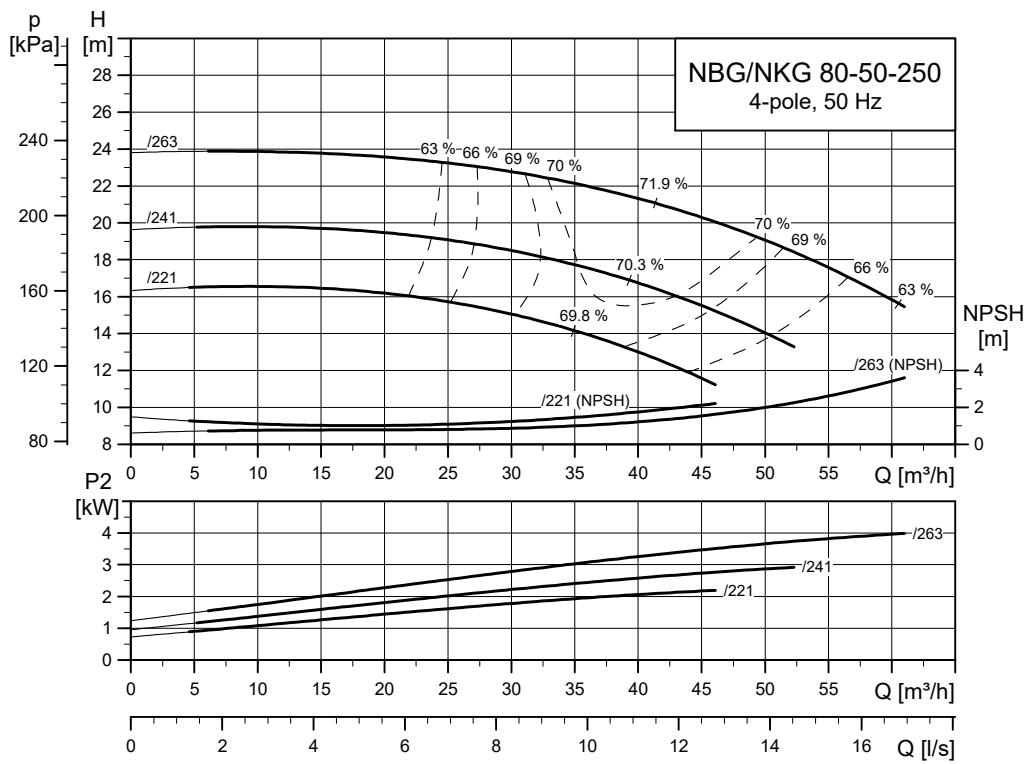
NBG, NKG 80-65-160



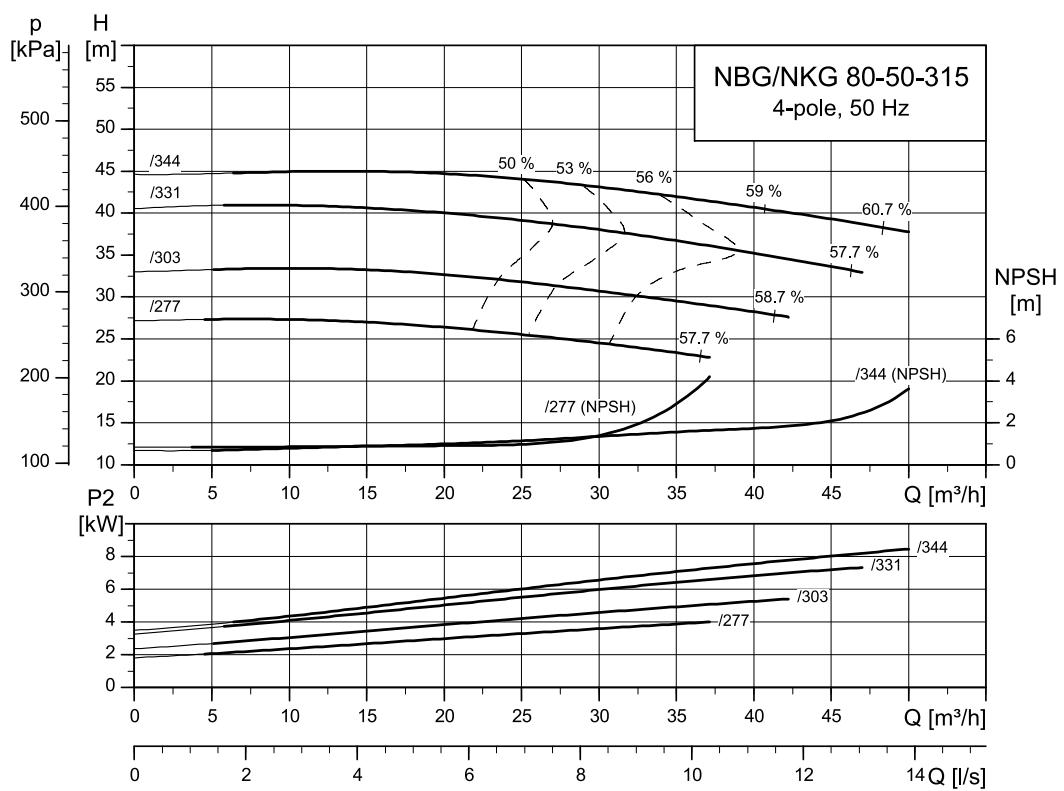
TM034951

NBG, NKG 80-50-200

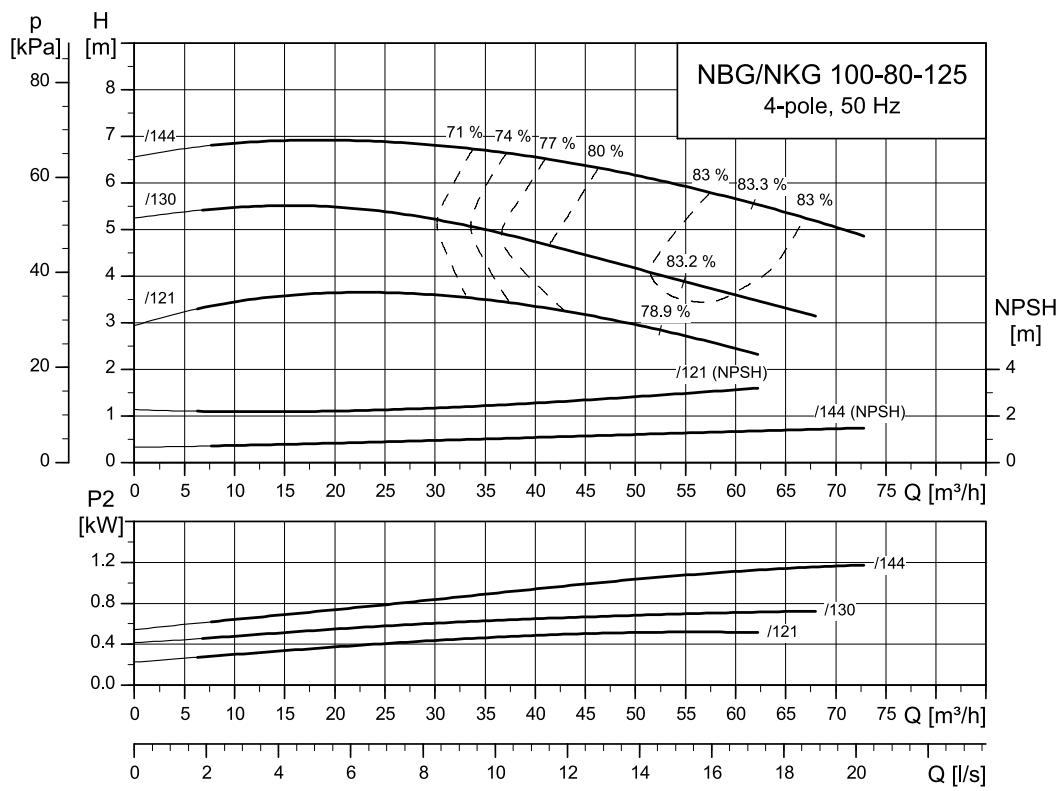
TM034952

NBG, NKG 80-50-250

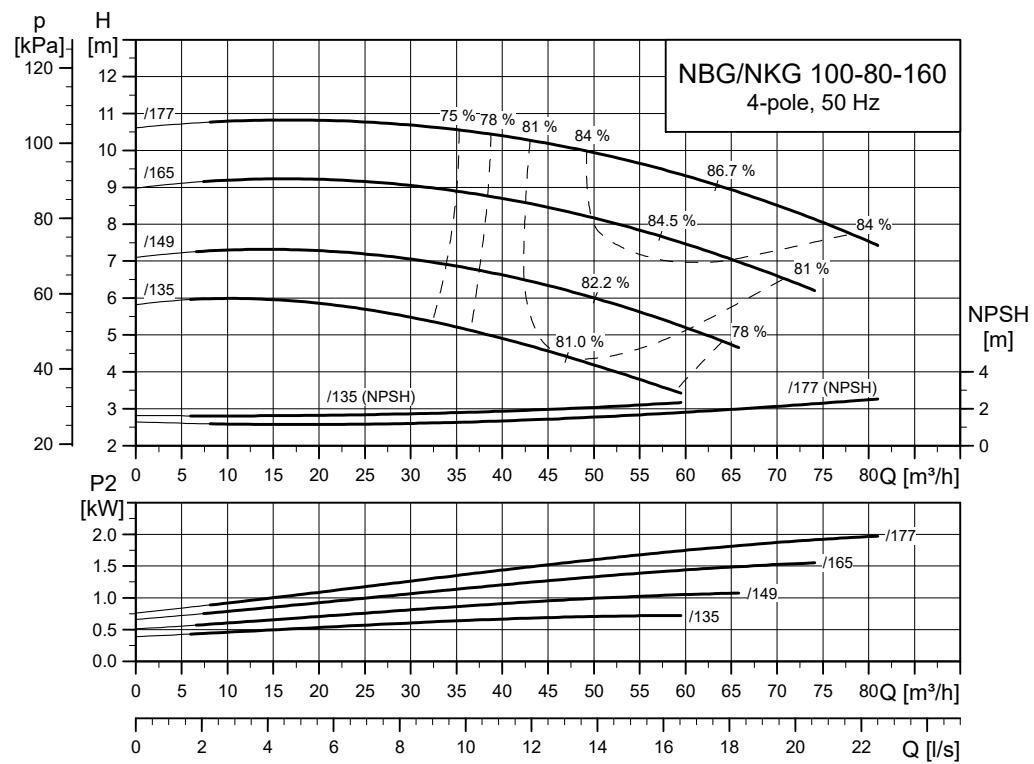
TM034953

NBG, NKG 80-50-315

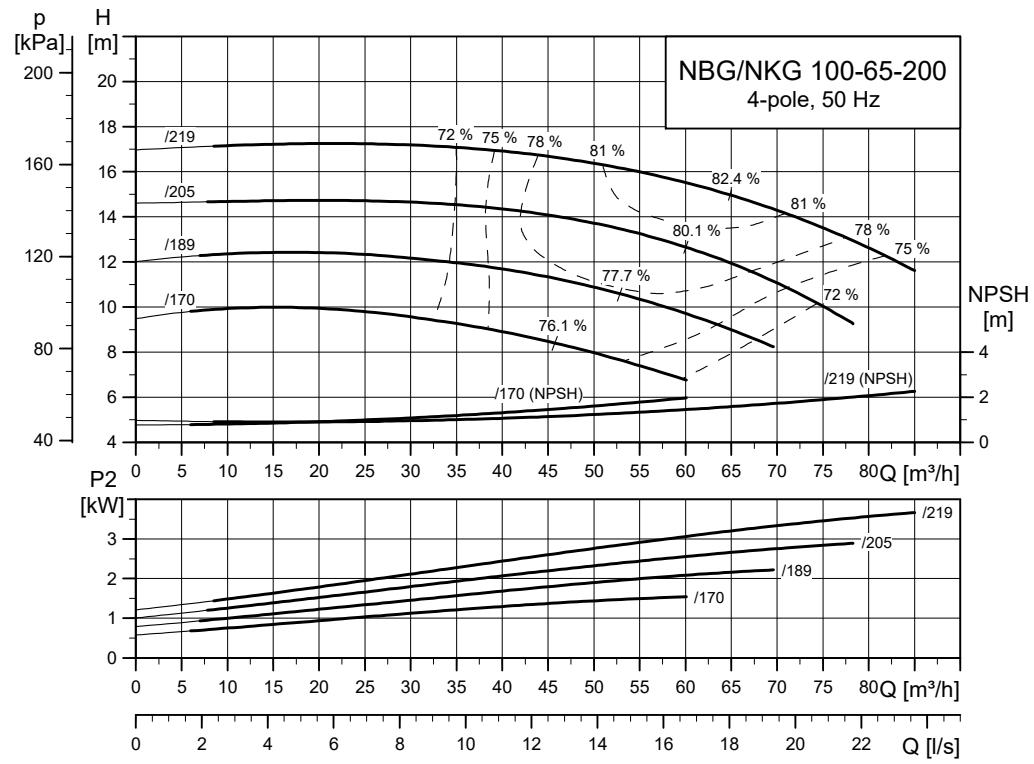
TM034954

NBG, NKG 100-80-125

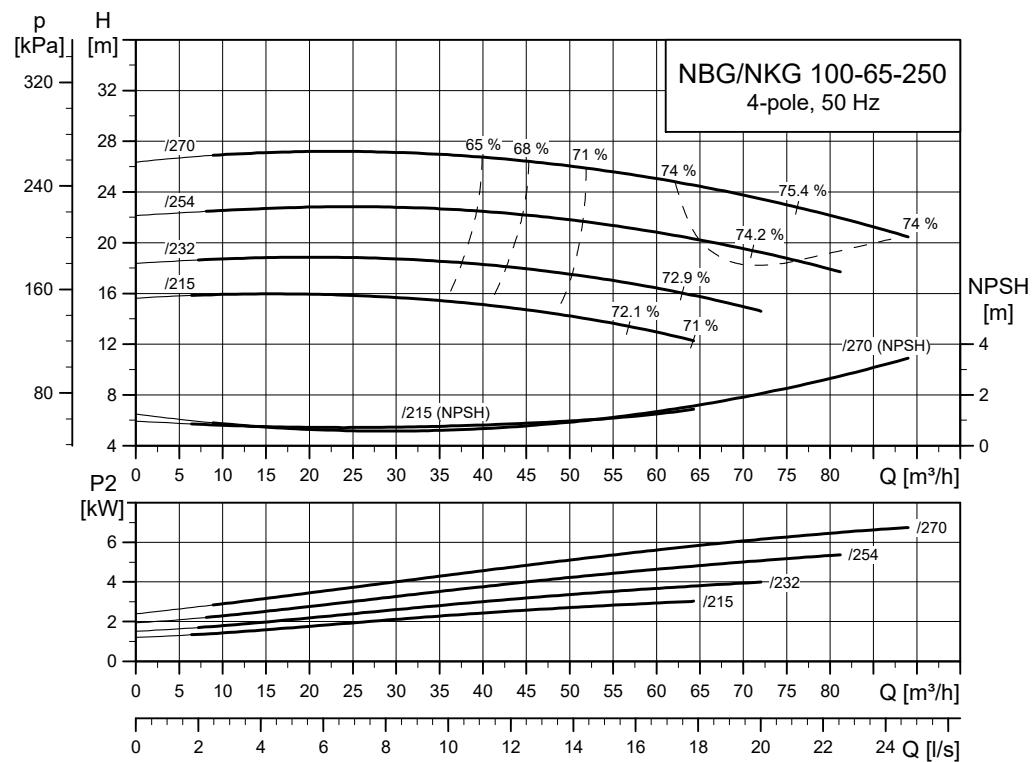
TM034955

NBG, NKG 100-80-160

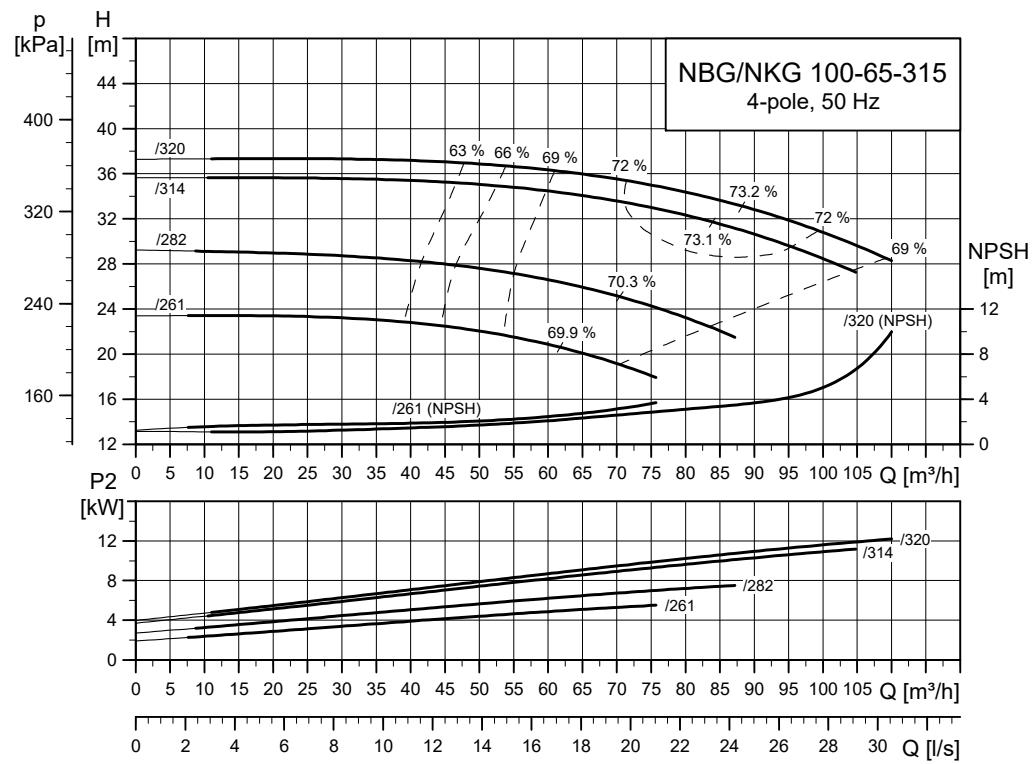
TM034956

NBG, NKG 100-65-200

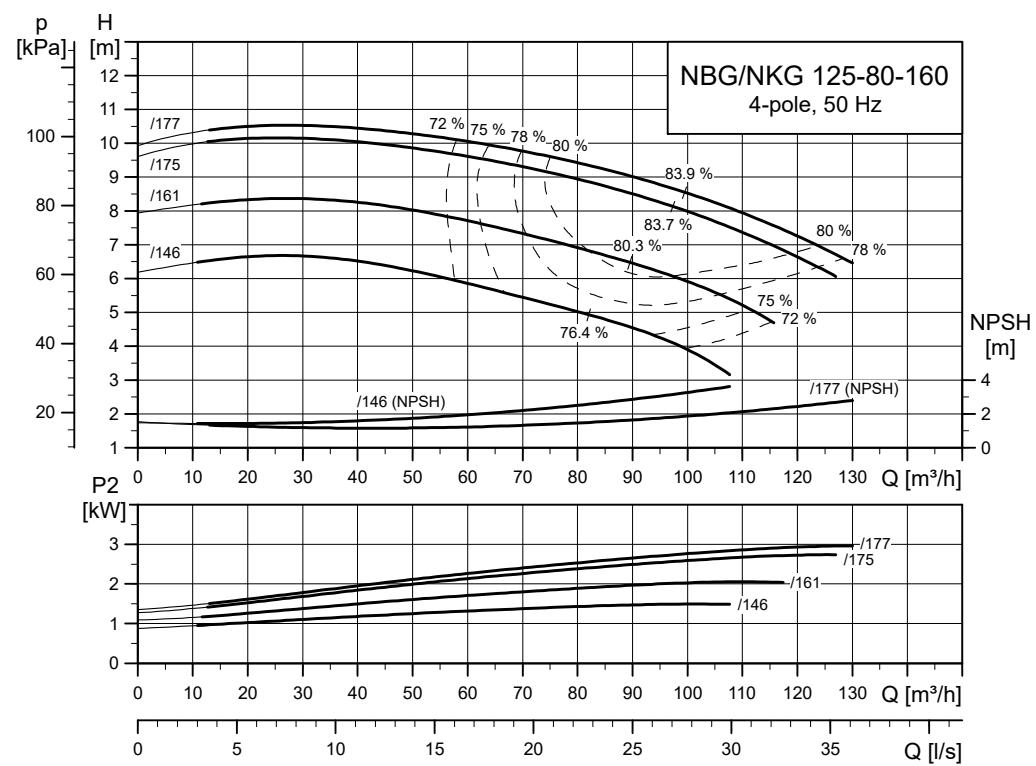
TM034957

NBG, NKG 100-65-250

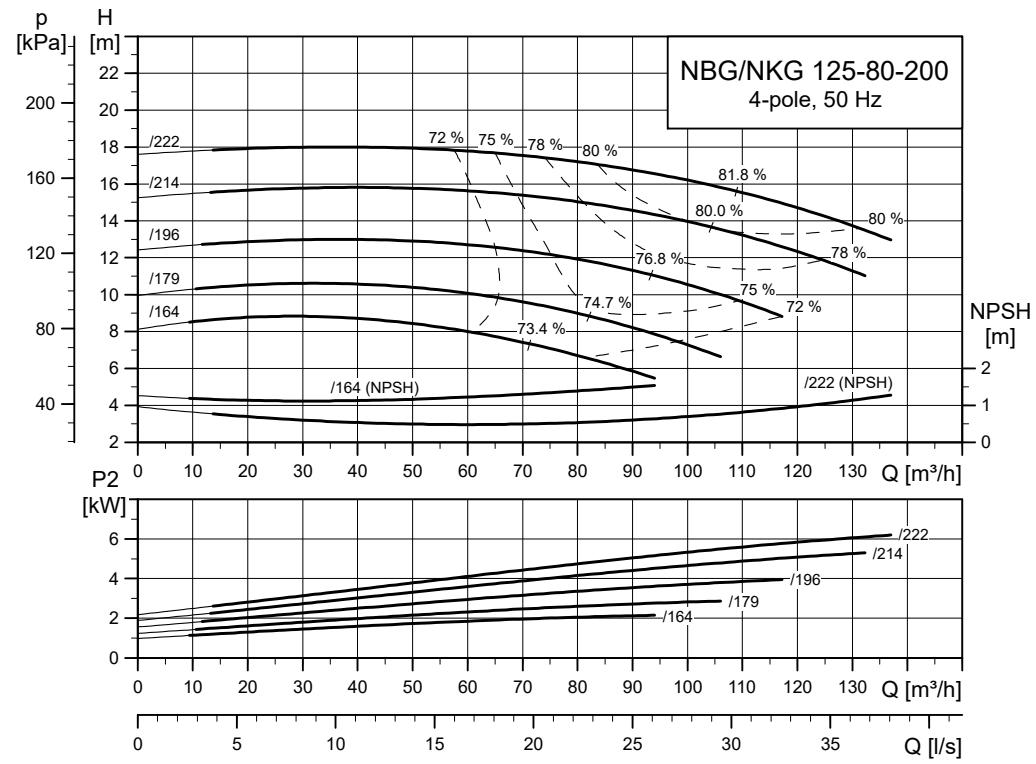
TM034958

NBG, NKG 100-65-315

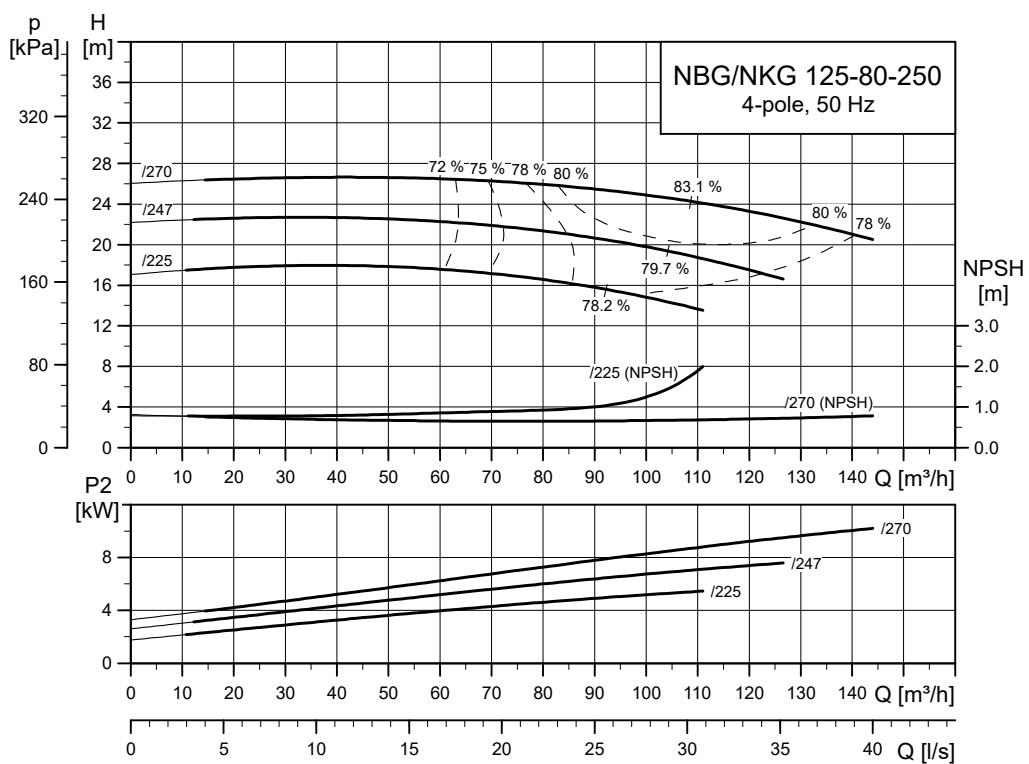
TM034959

NBG, NKG 125-80-160

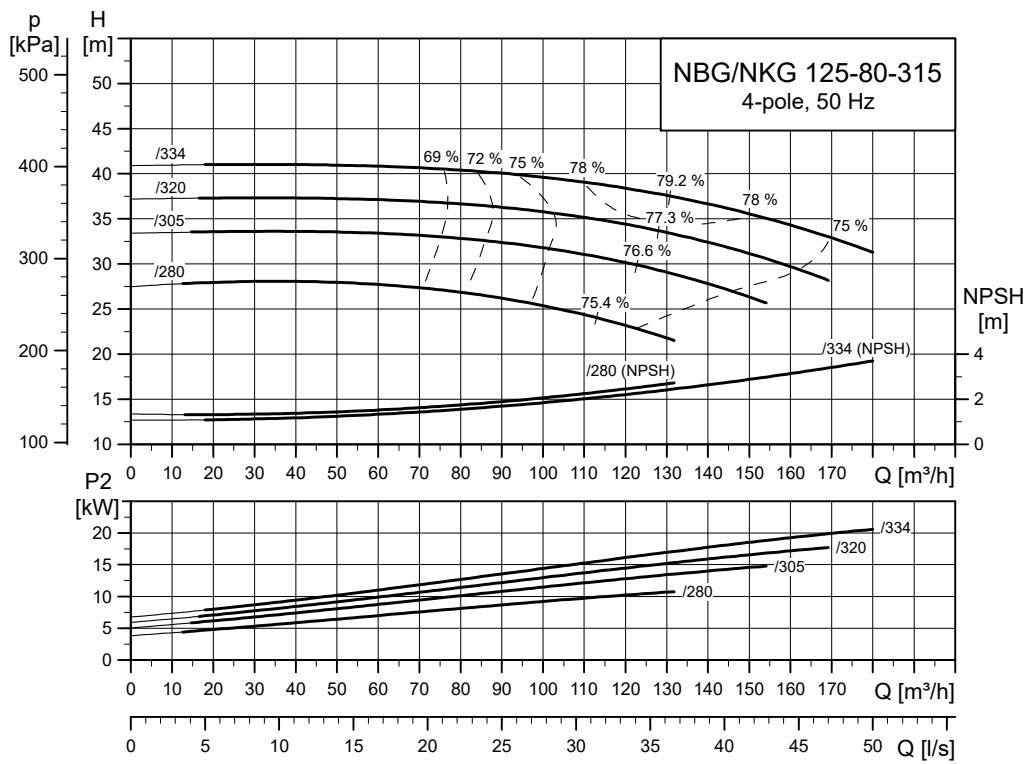
TM034960

NBG, NKG 125-80-200

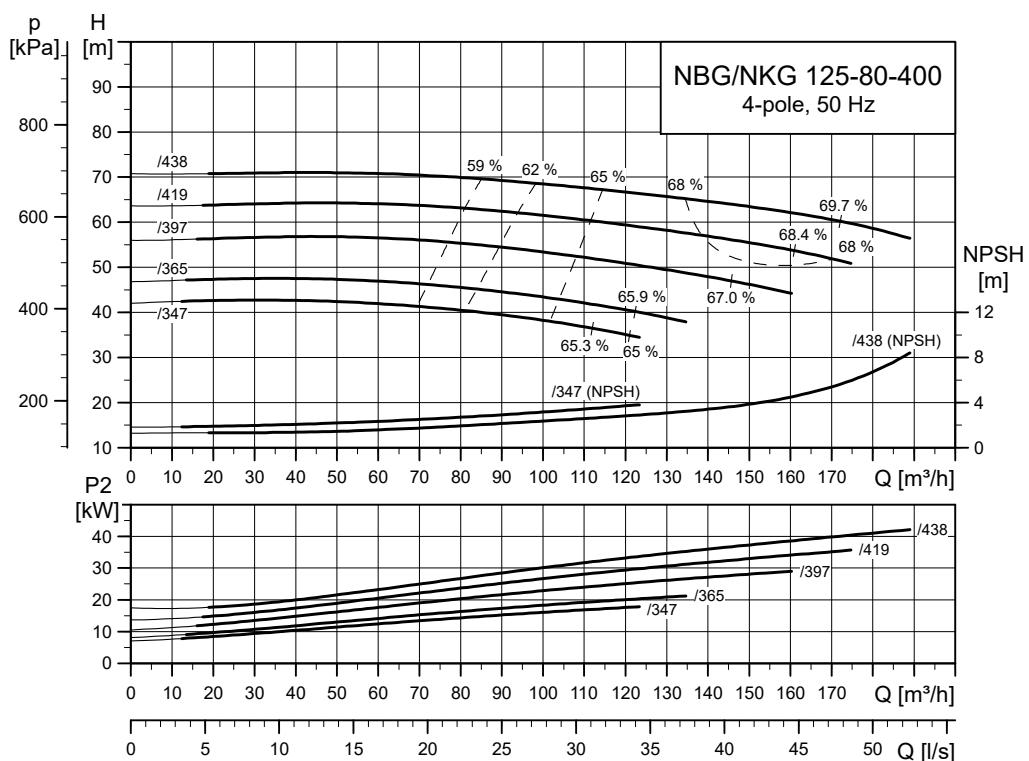
TM034961

NBG, NKG 125-80-250

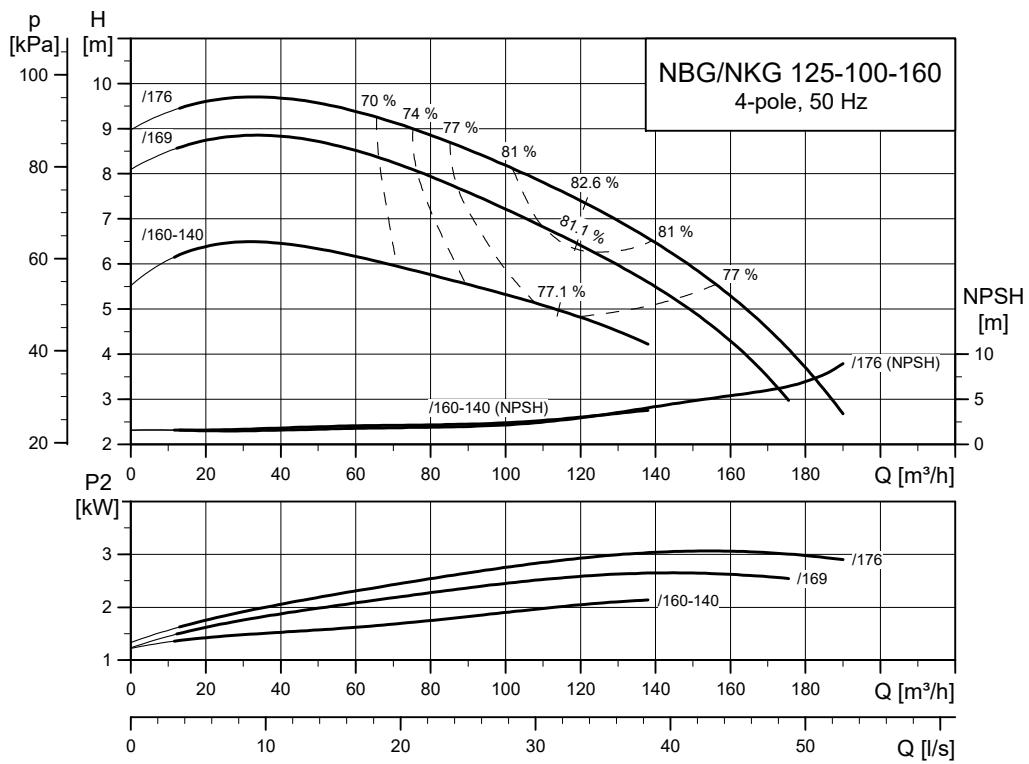
TM034962

NBG, NKG 125-80-315

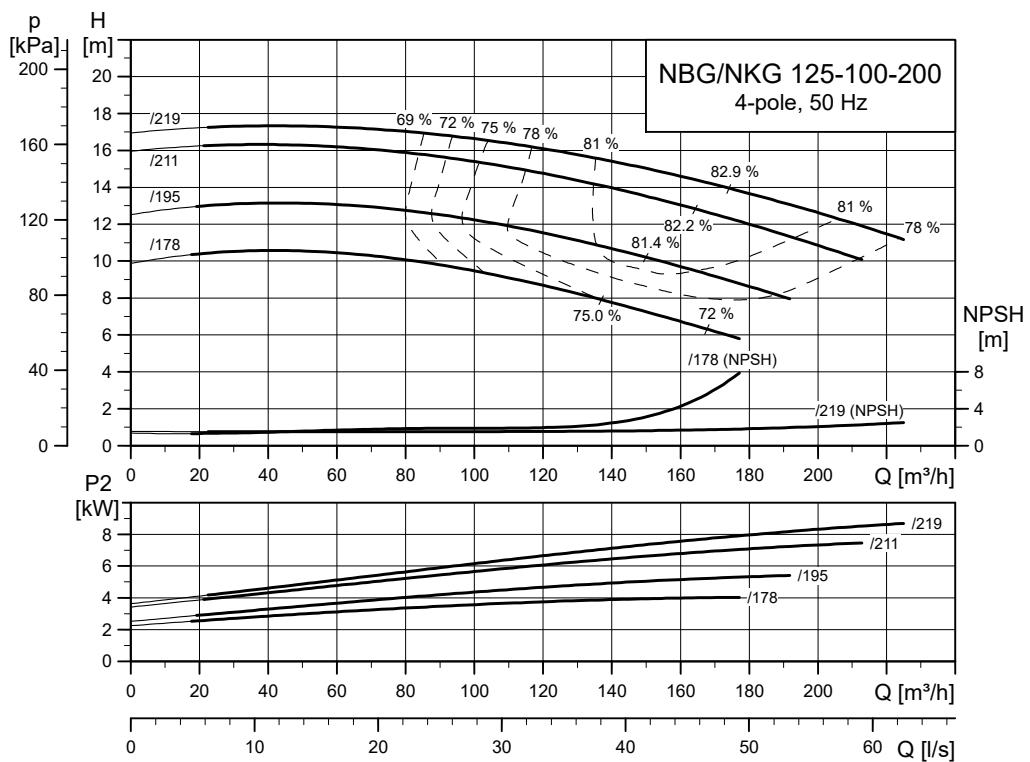
TM034963

NBG, NKG 125-80-400

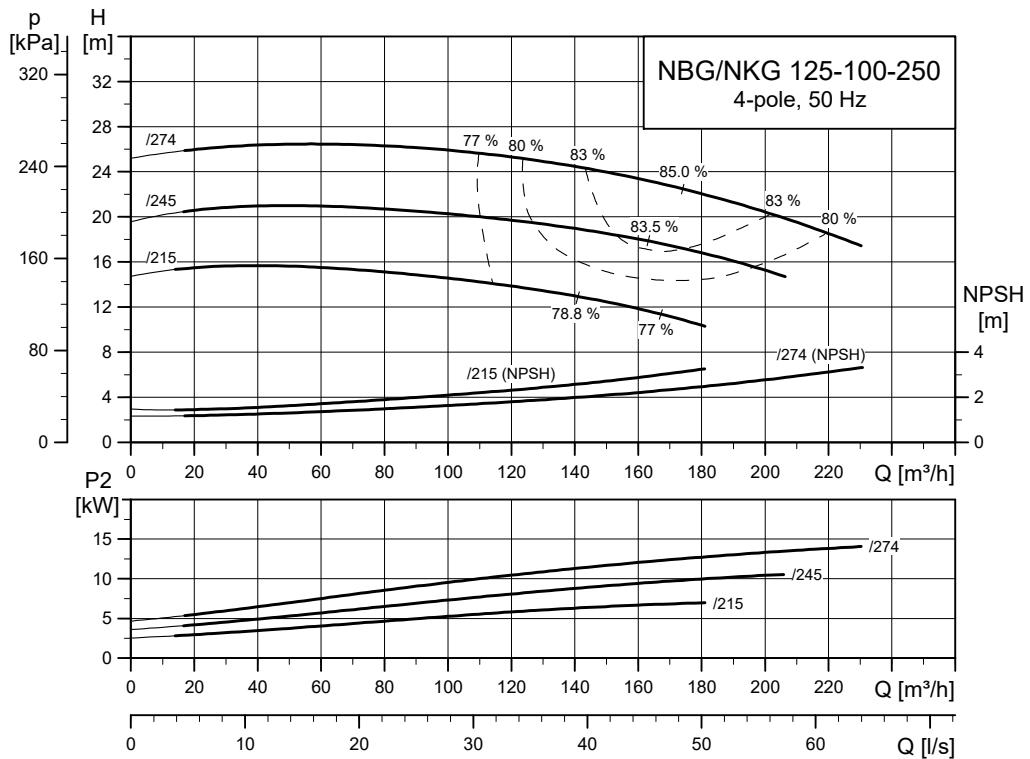
TM034964

NBG, NKG 125-100-160

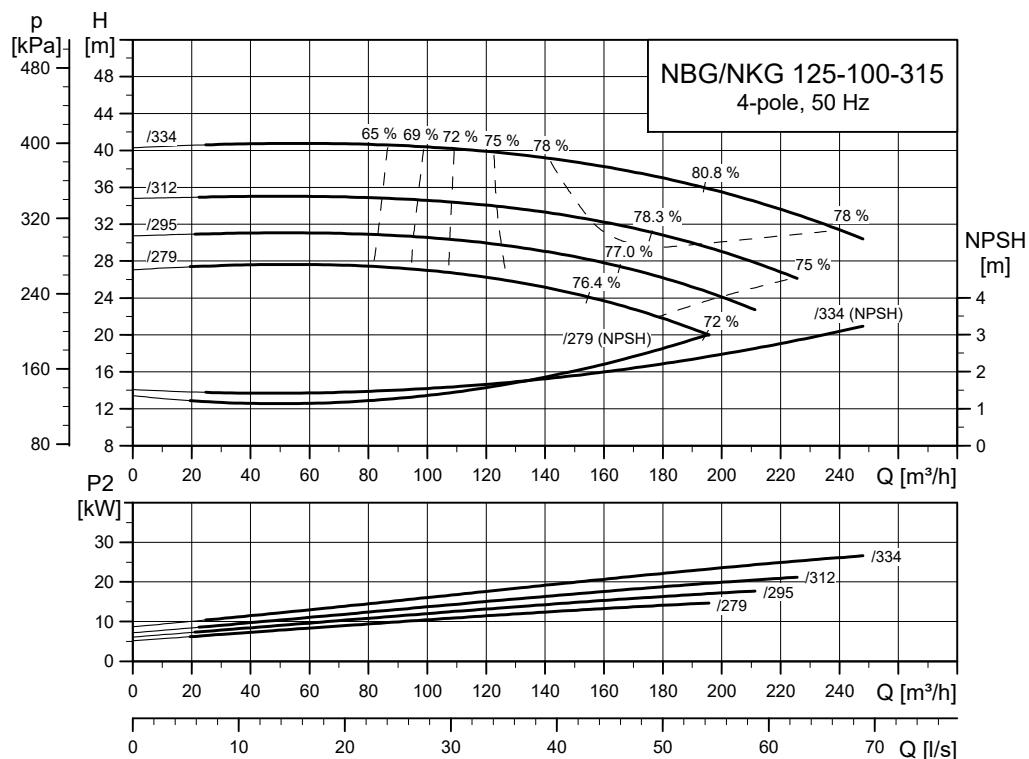
TM034965

NBG, NKG 125-100-200

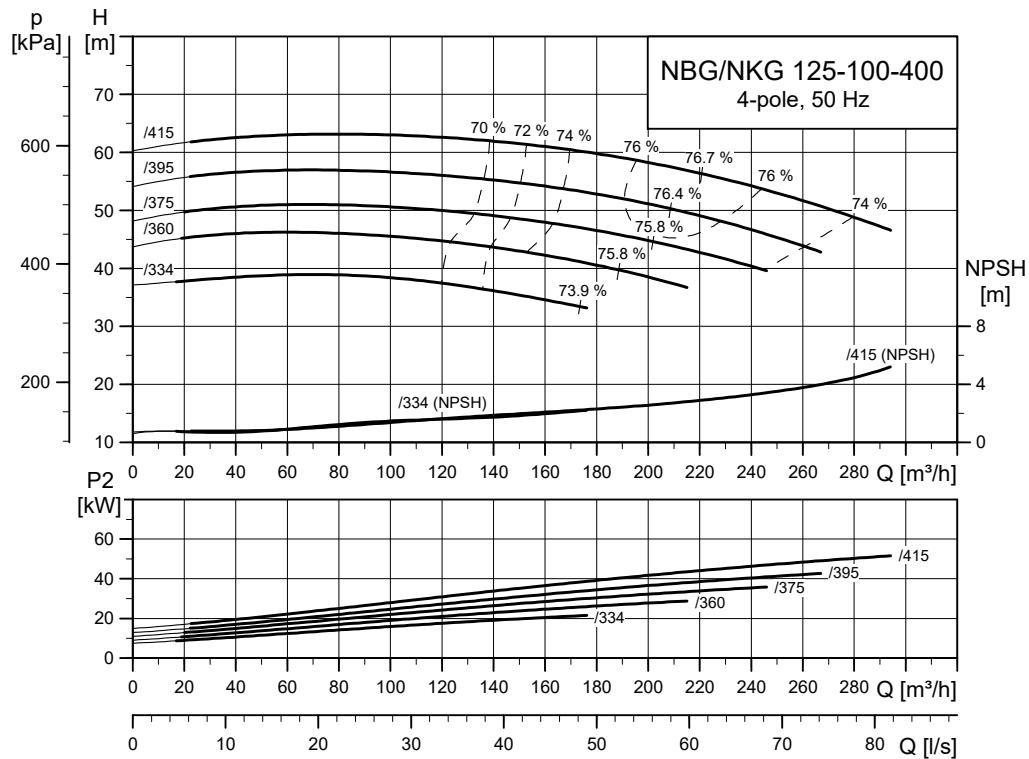
TM034966

NBG, NKG 125-100-250

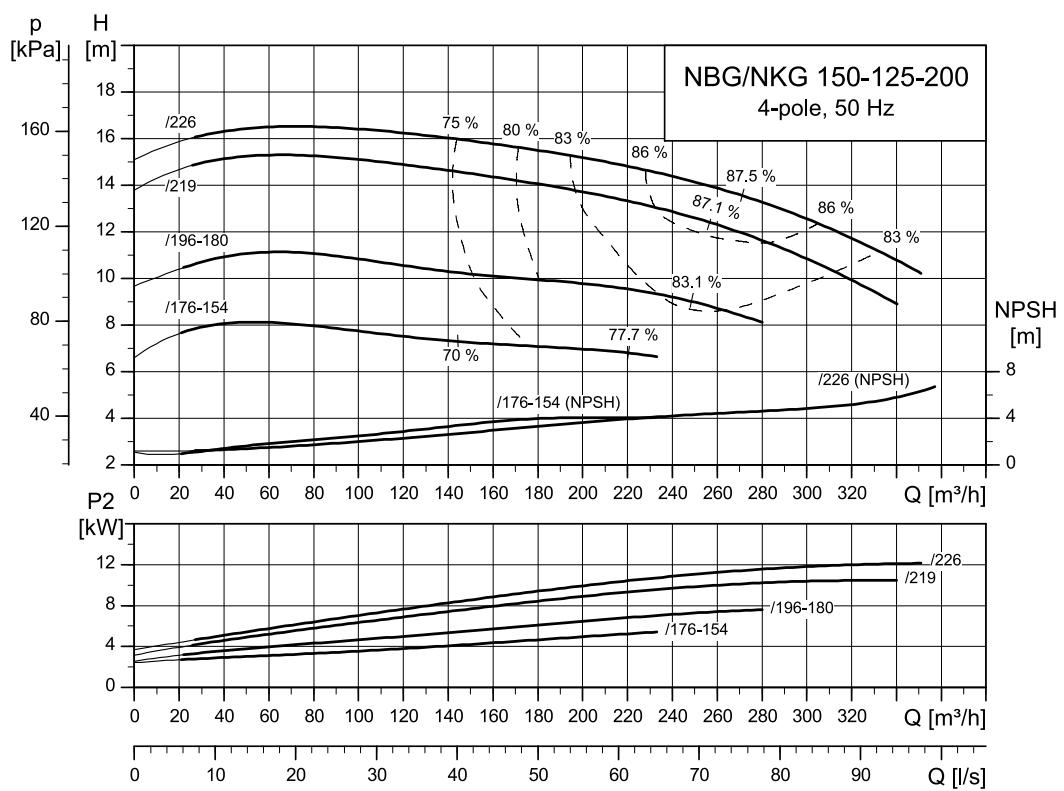
TM034967

NBG, NKG 125-100-315

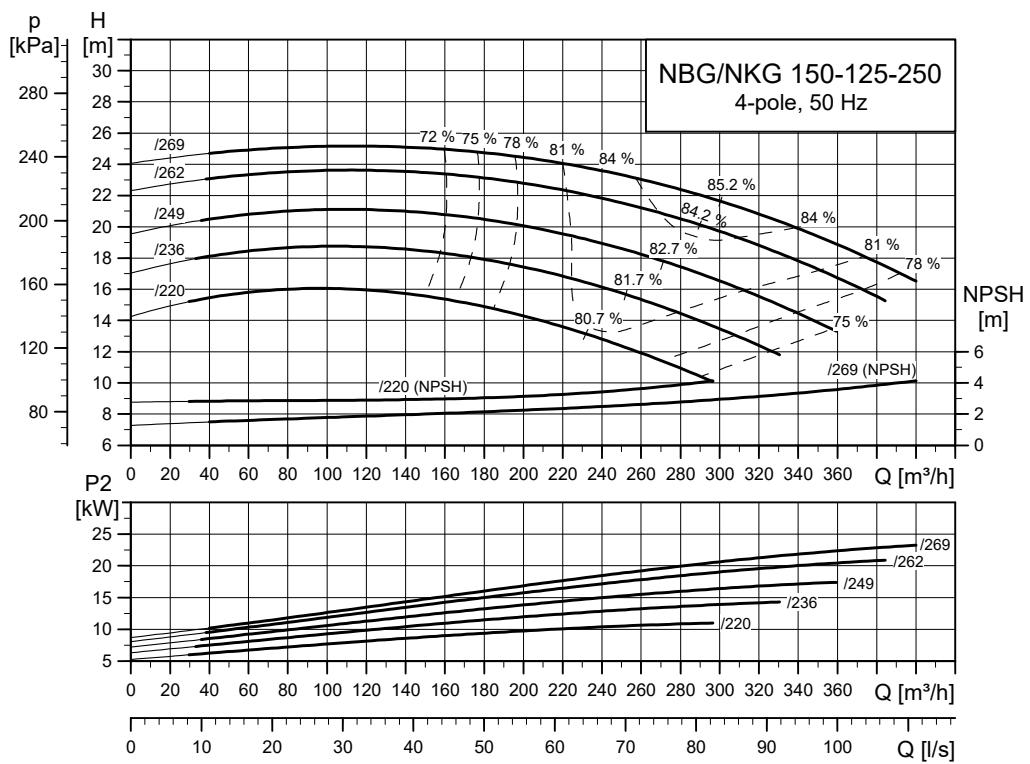
TM034968

NBG, NKG 125-100-400

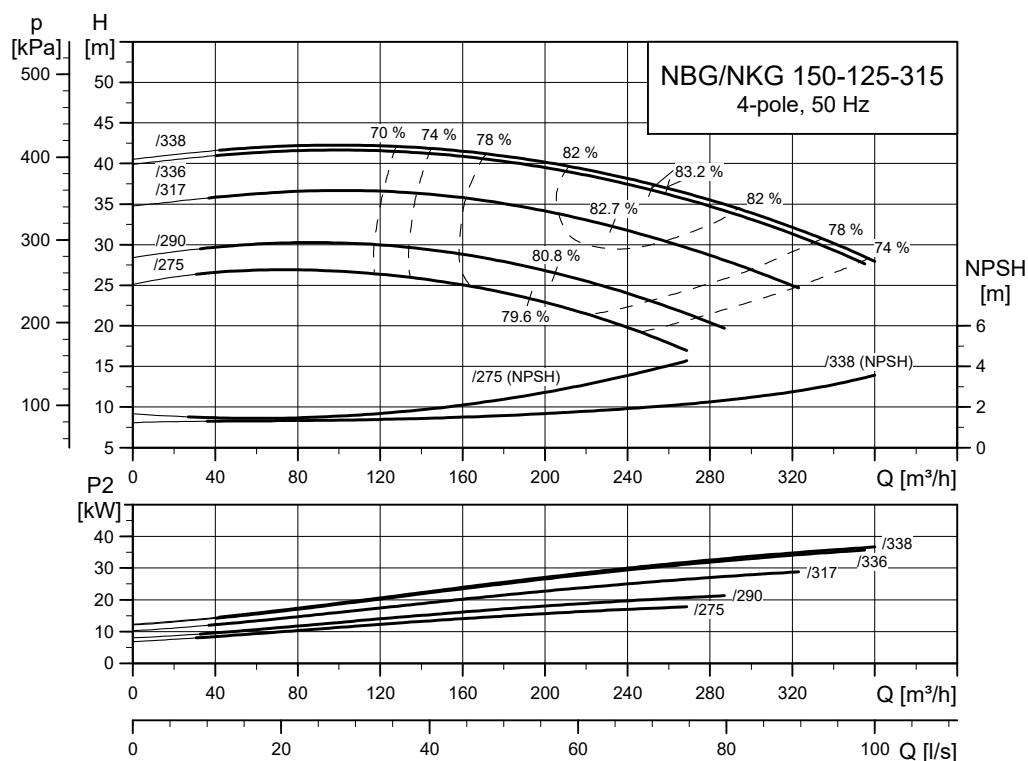
TM034969

NBG, NKG 150-125-200

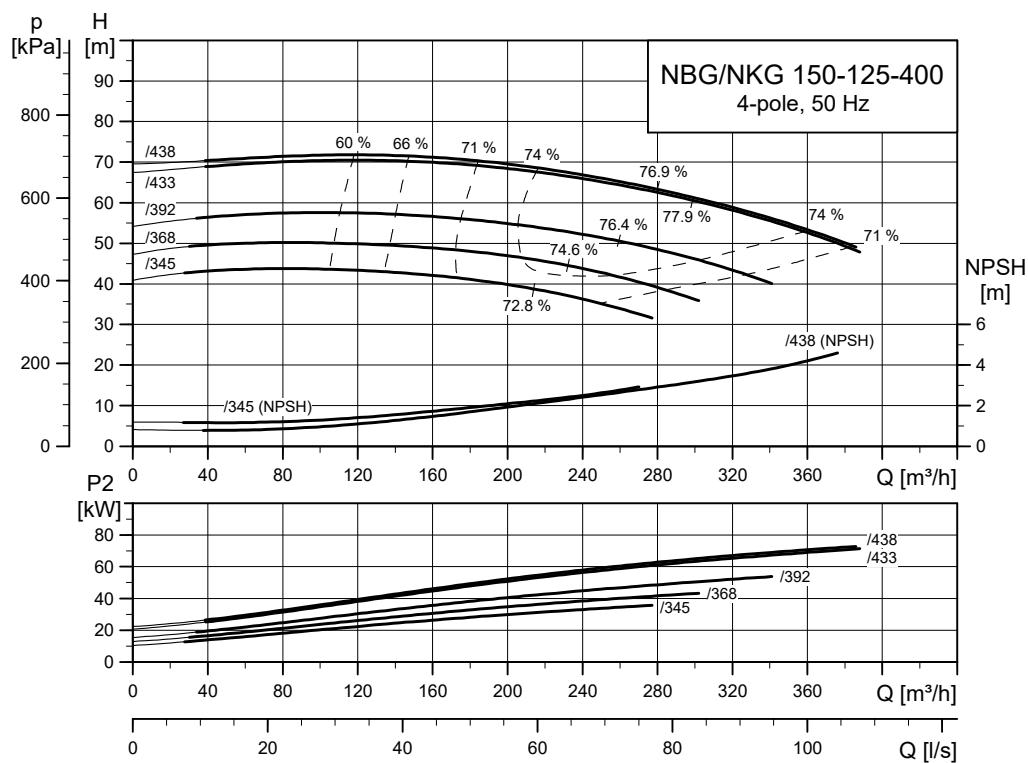
TM034971

NBG, NKG 150-125-250

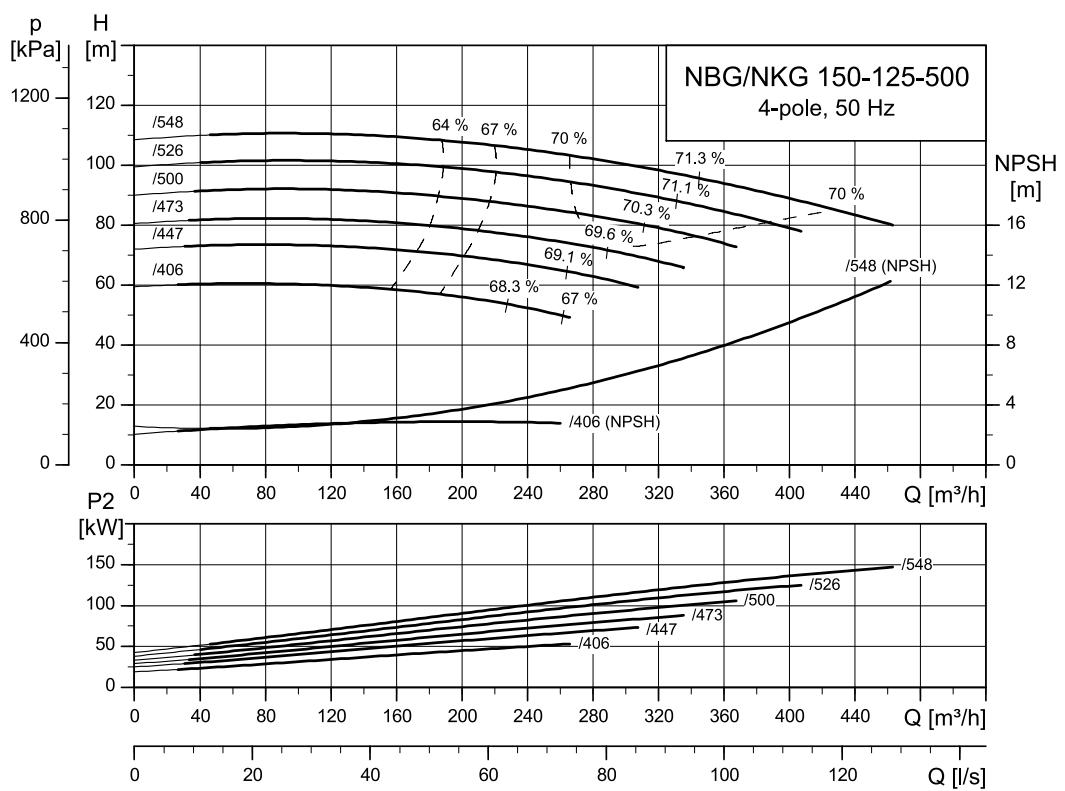
TM034971

NBG, NKG 150-125-315

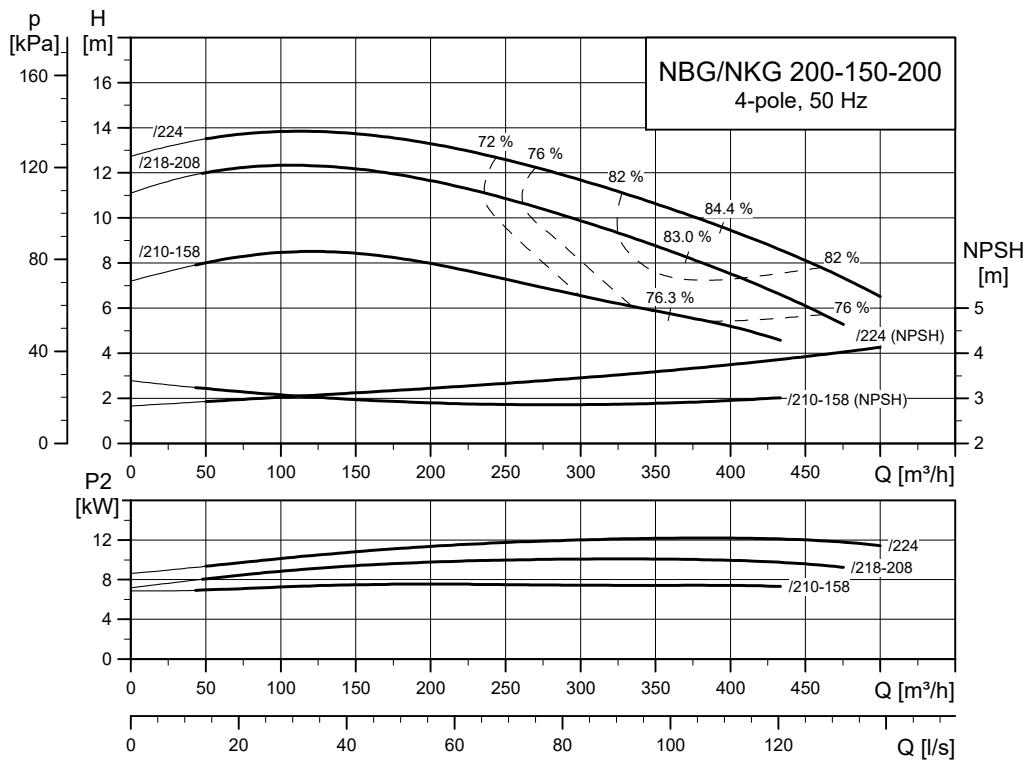
TM034972

NBG, NKG 150-125-400

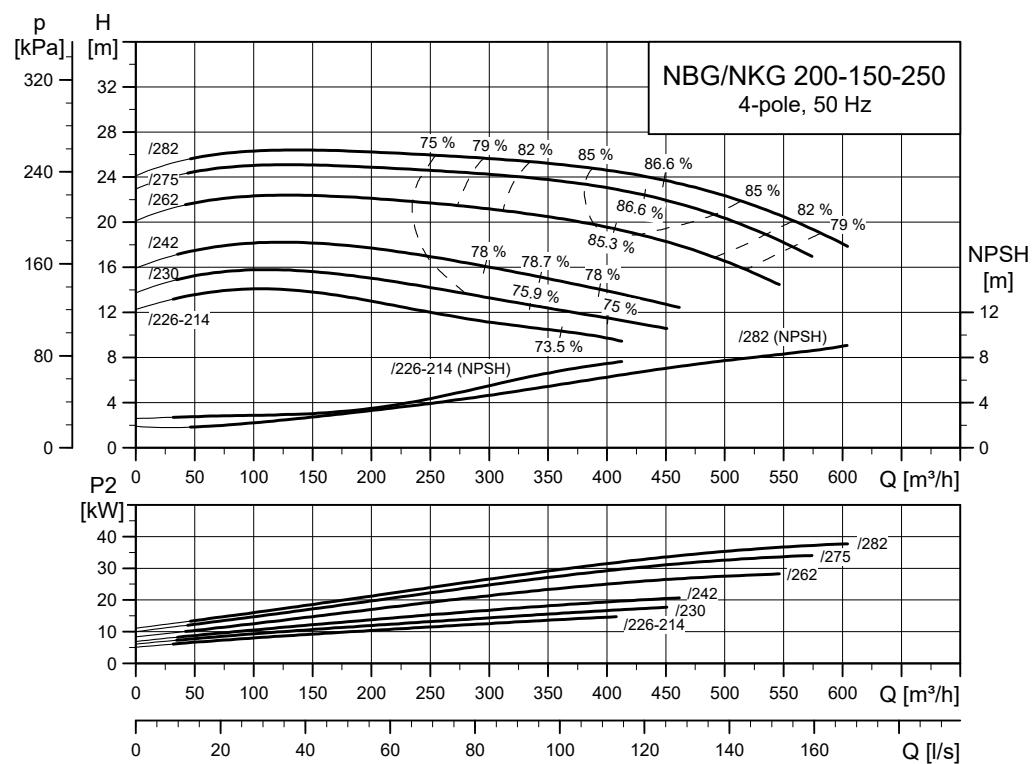
TM052343

NBG, NKG 150-125-500

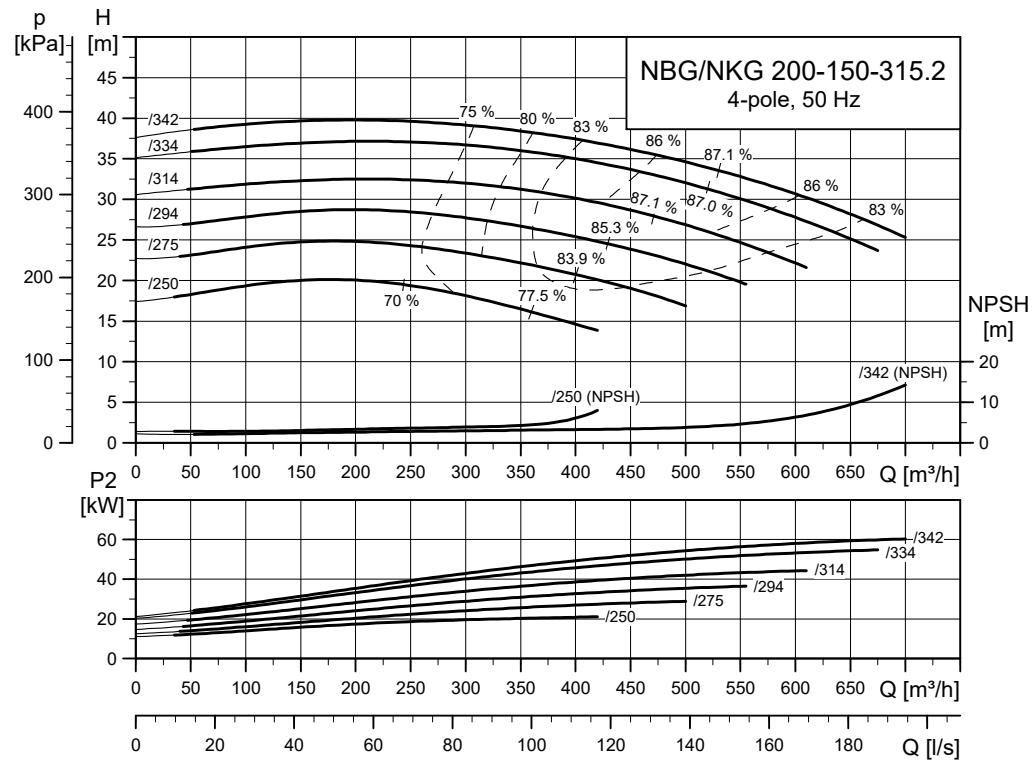
TM034974

NBG, NKG 200-150-200

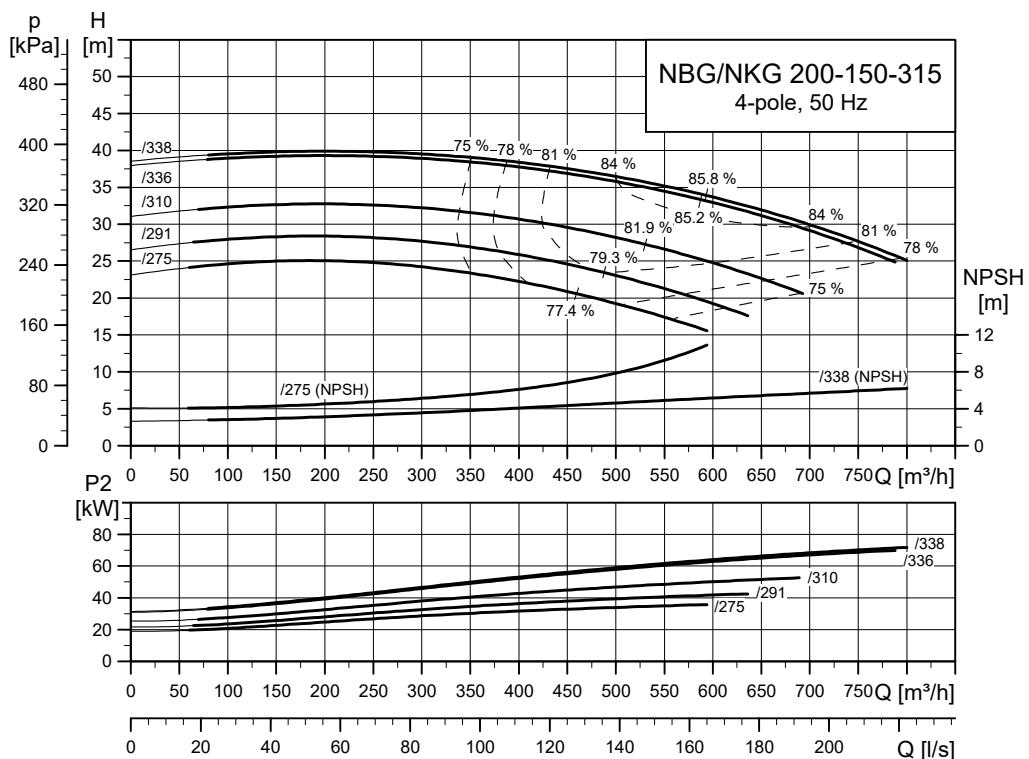
TM034975

NBG, NKG 200-150-250

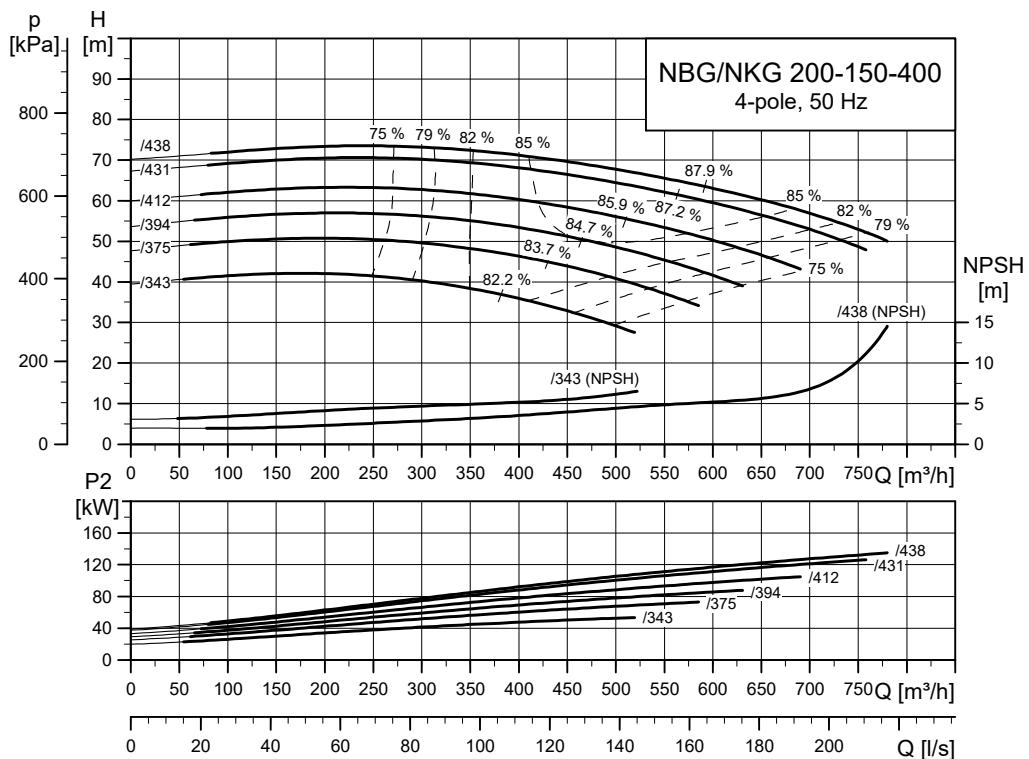
TM034976

NBG, NKG 200-150-315.2

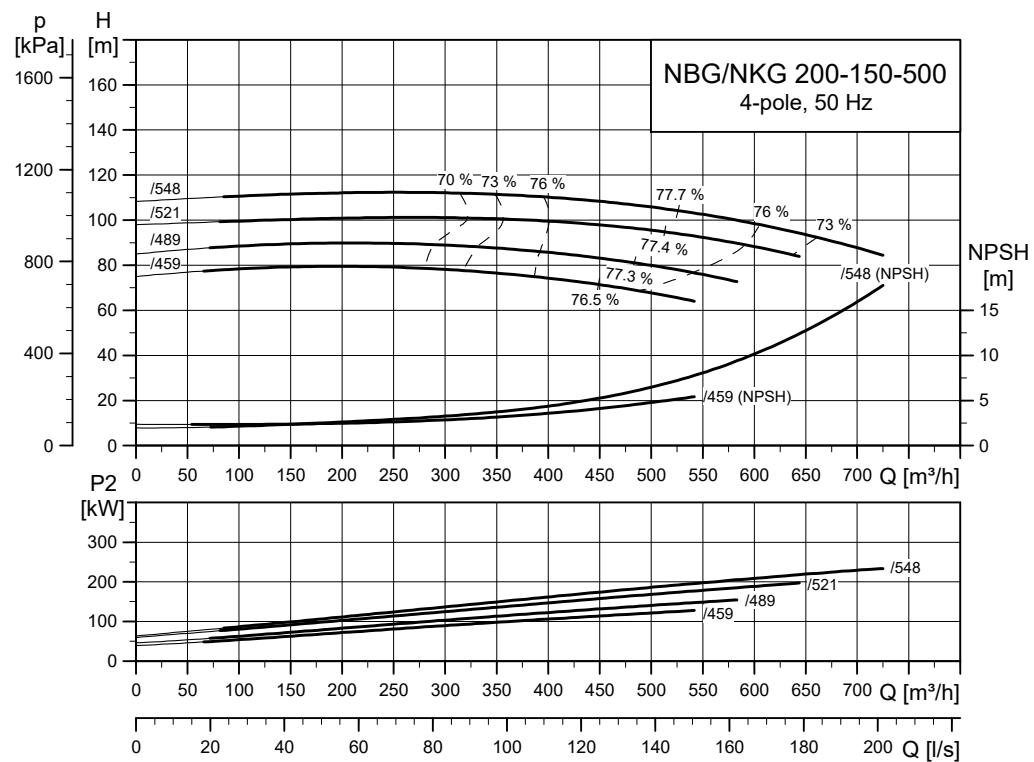
TM064756

NBG, NKG 200-150-315

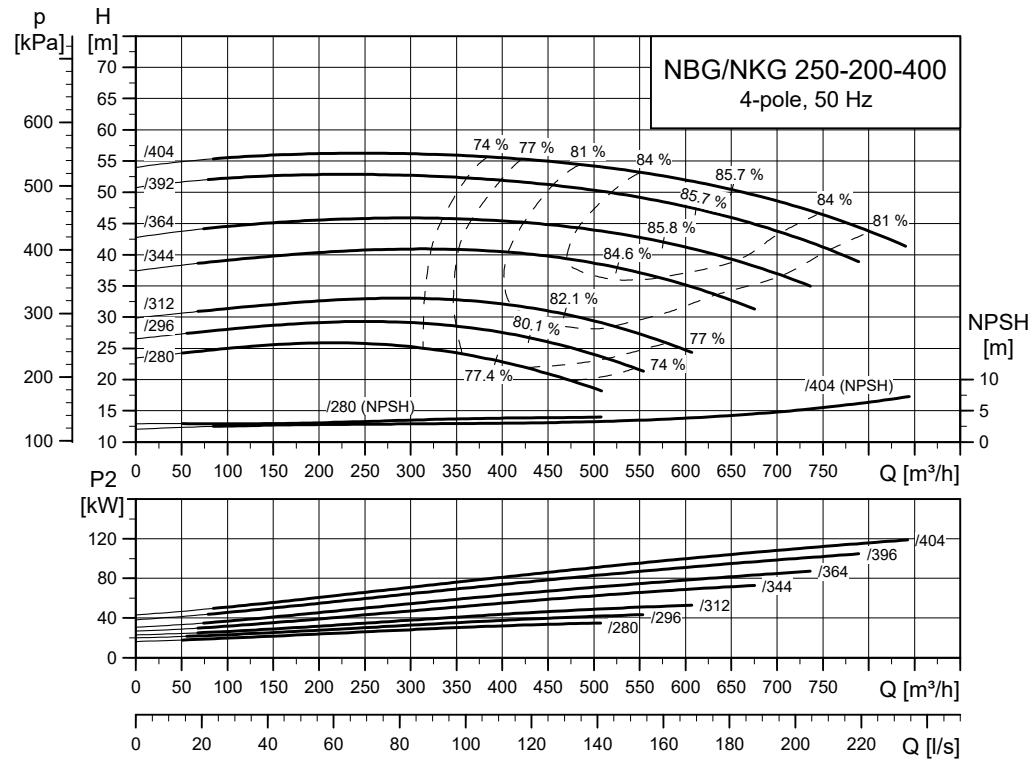
TM034977

NBG, NKG 200-150-400

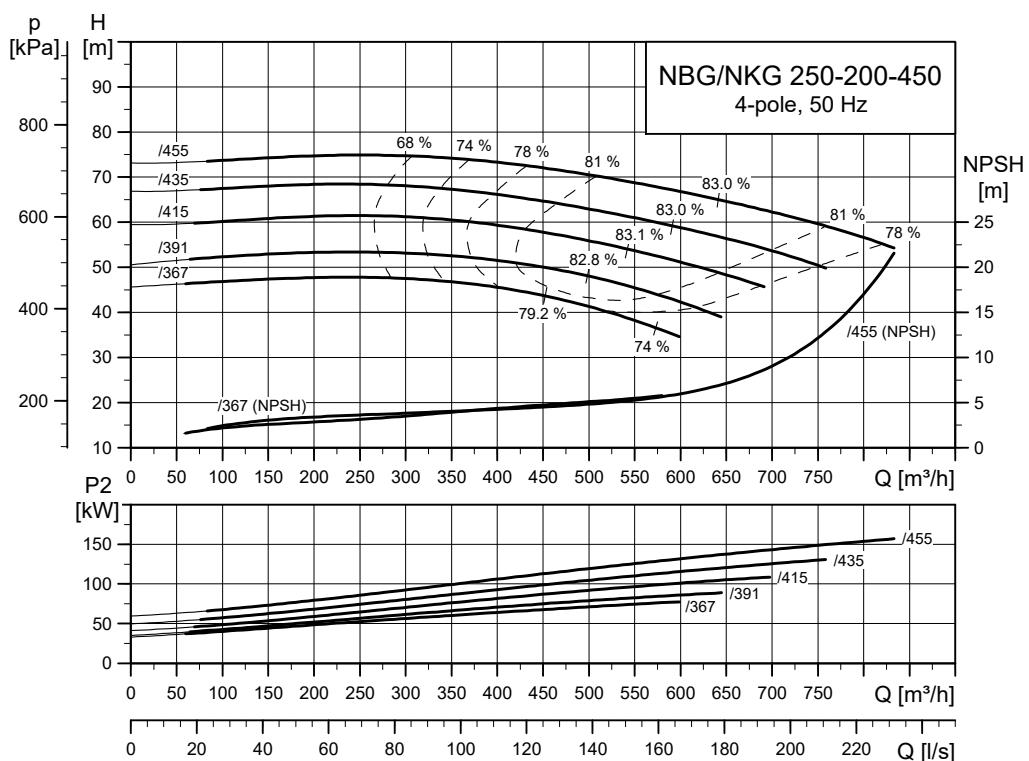
TM034978

NBG, NKG 200-150-500

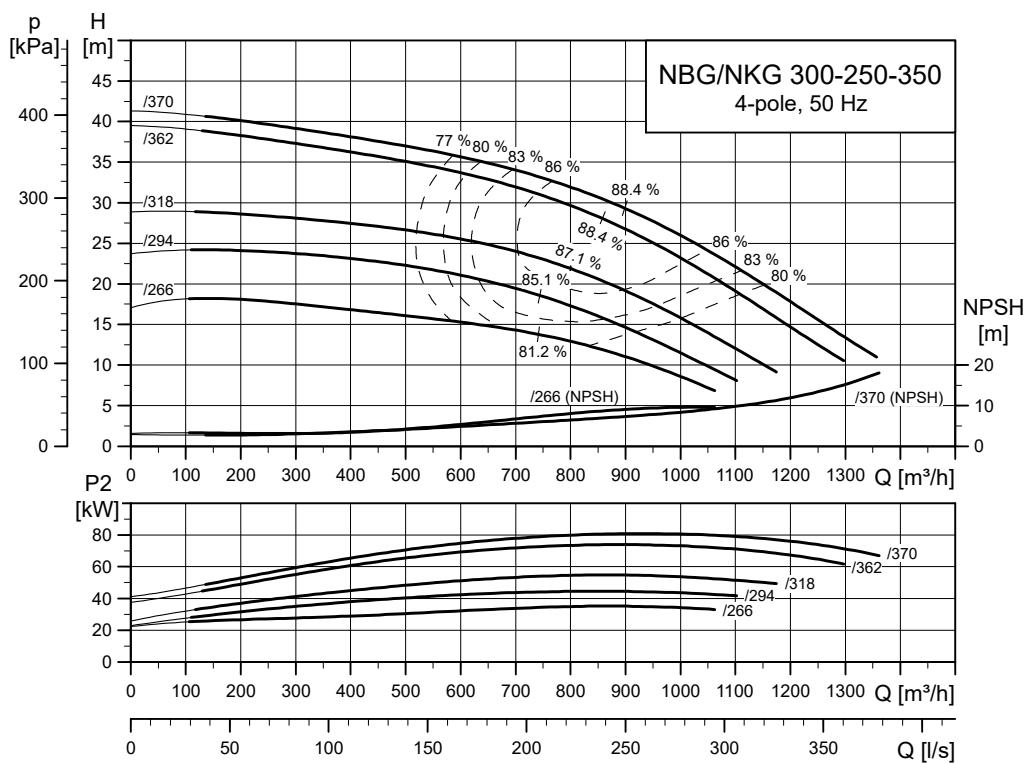
TM034979

NBG, NKG 250-200-400

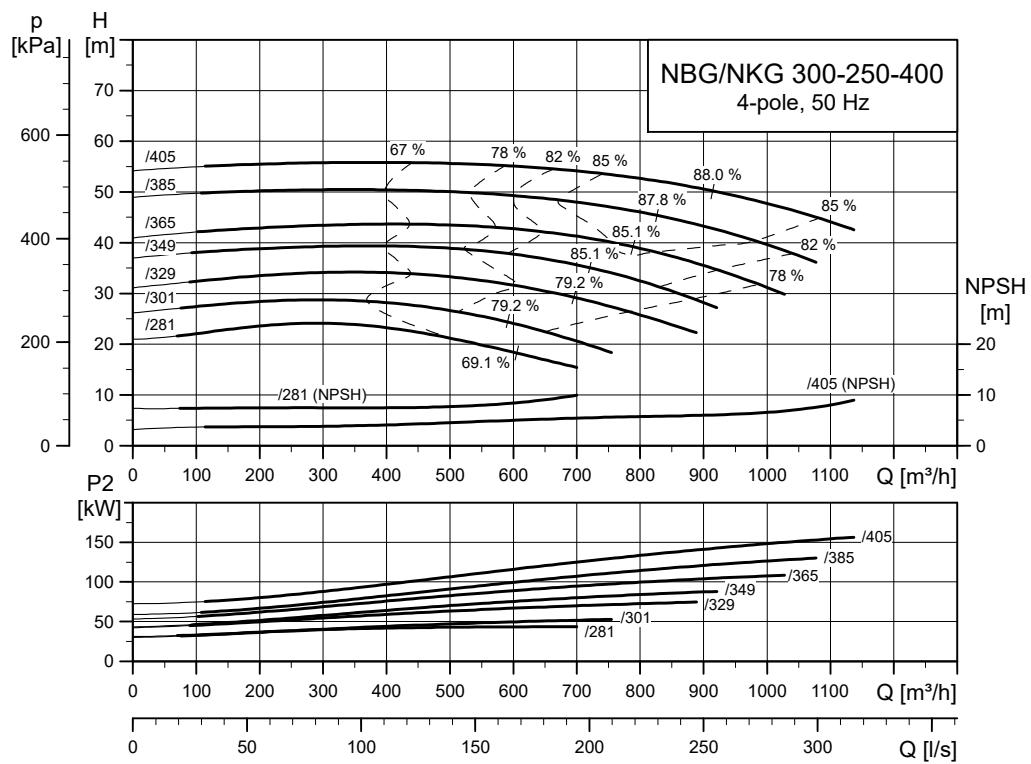
TM044943

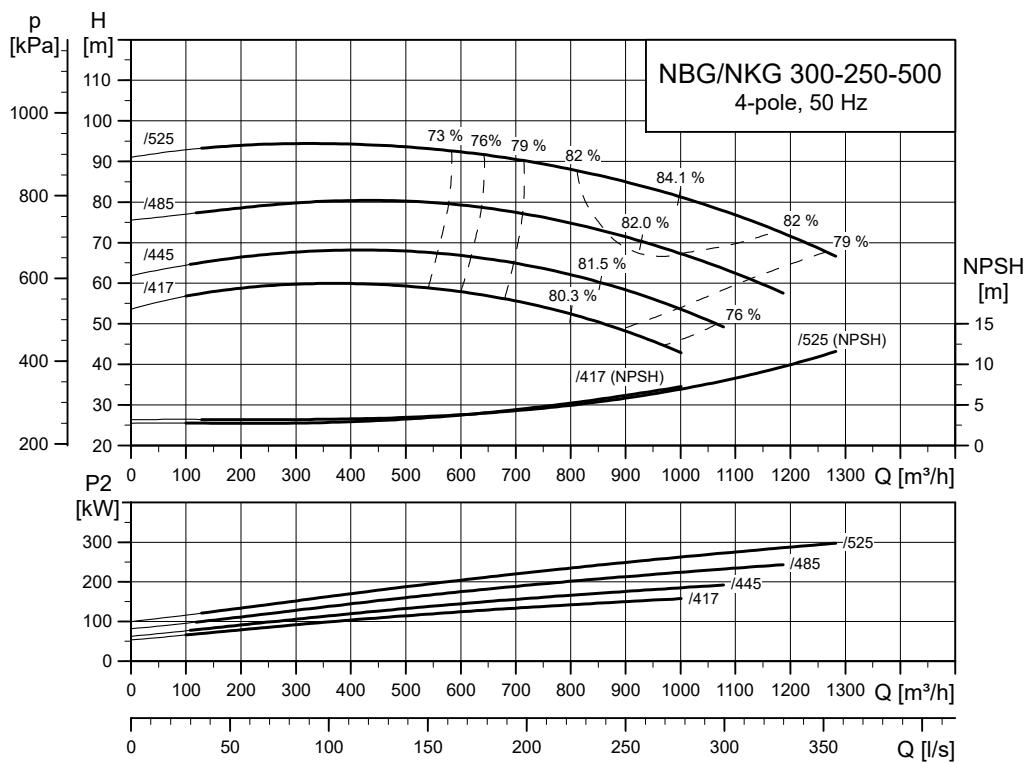
NBG, NKG 250-200-450

TM043963

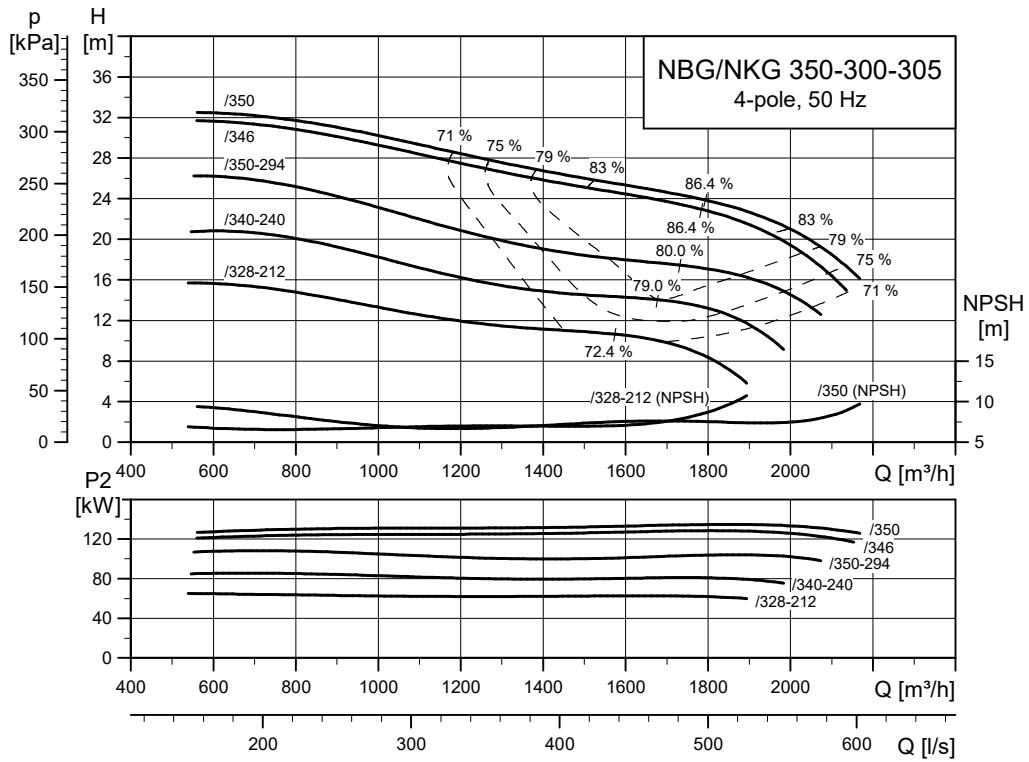
NBG, NKG 300-250-350

TM045962

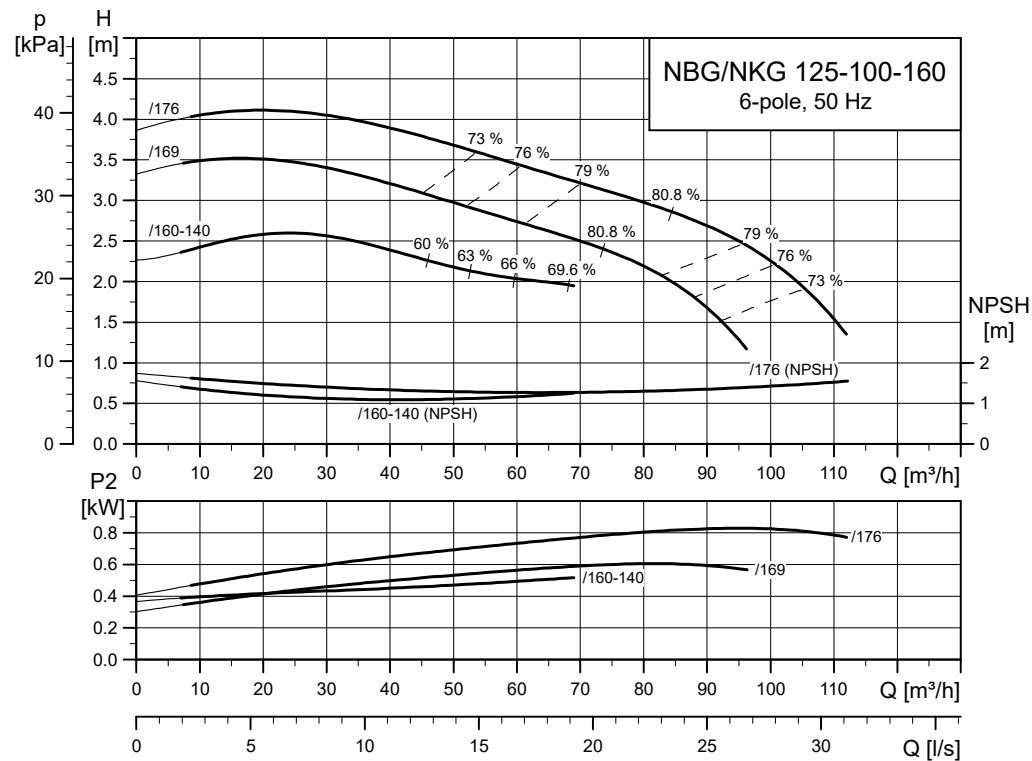
NBG, NKG 300-250-400

NBG, NKG 300-250-500

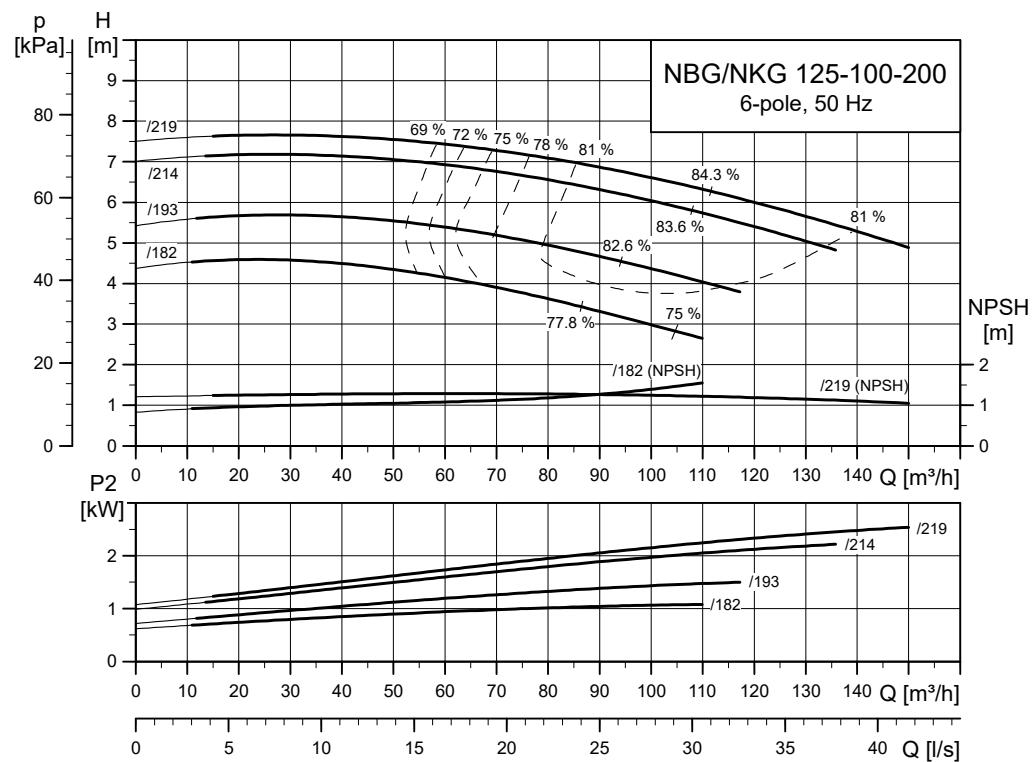
TM045966

NBG, NKG 350-300-305

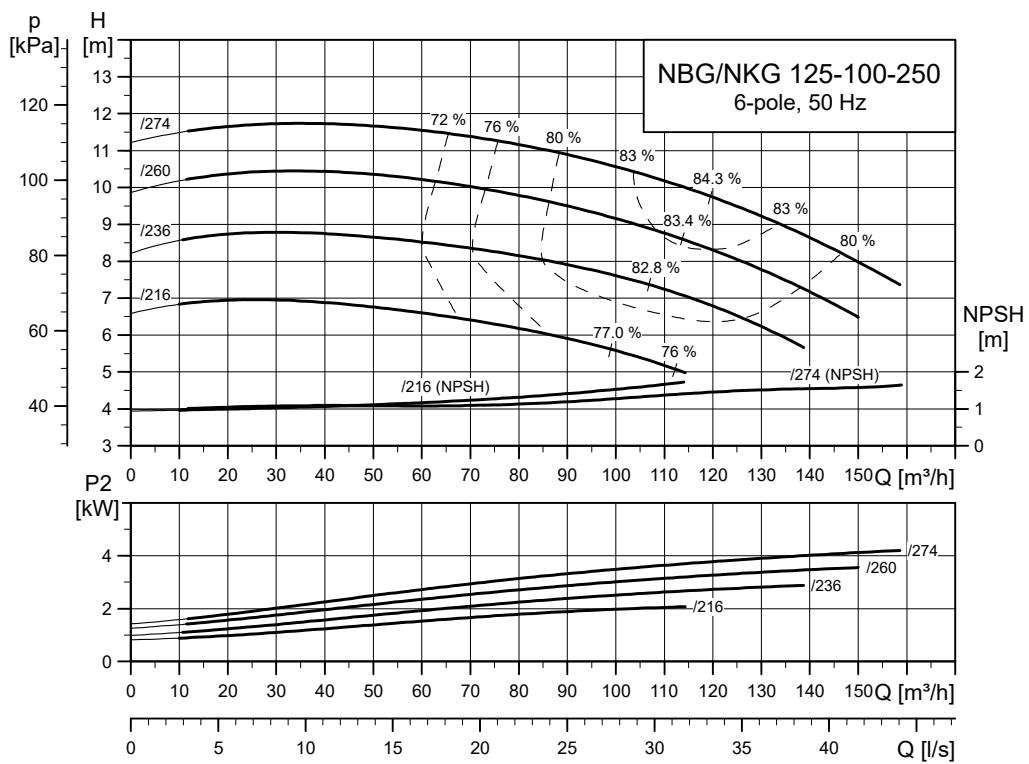
TM071264

6-pole**NBG, NKG 125-100-160**

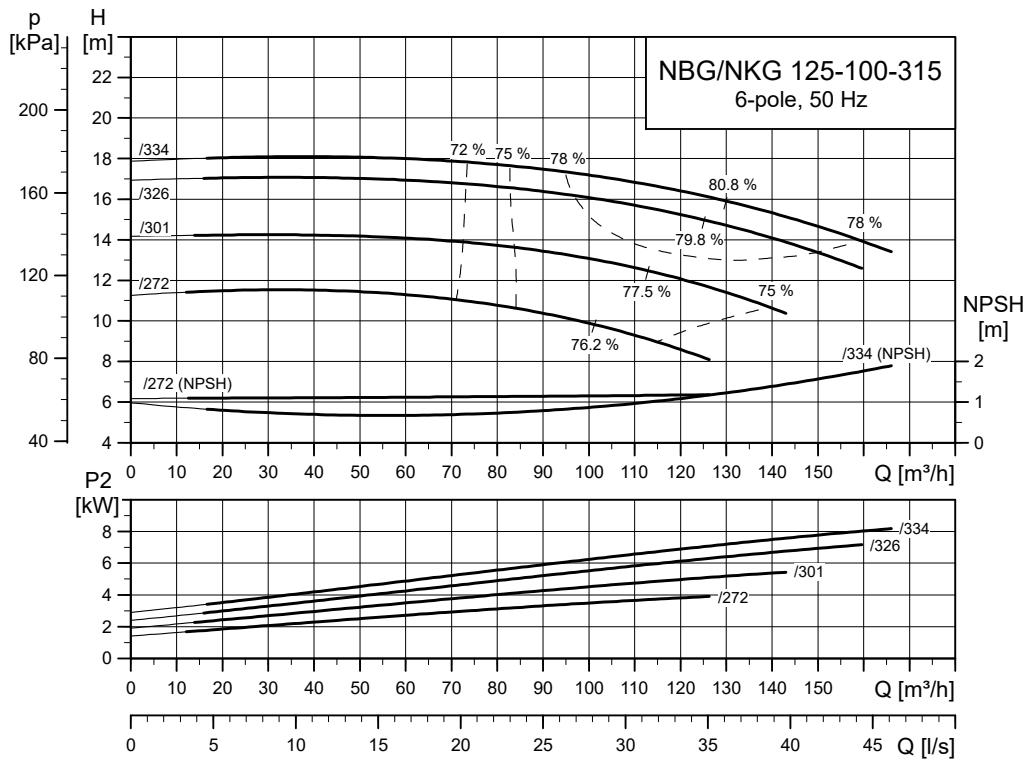
TM034980

NBG, NKG 125-100-200

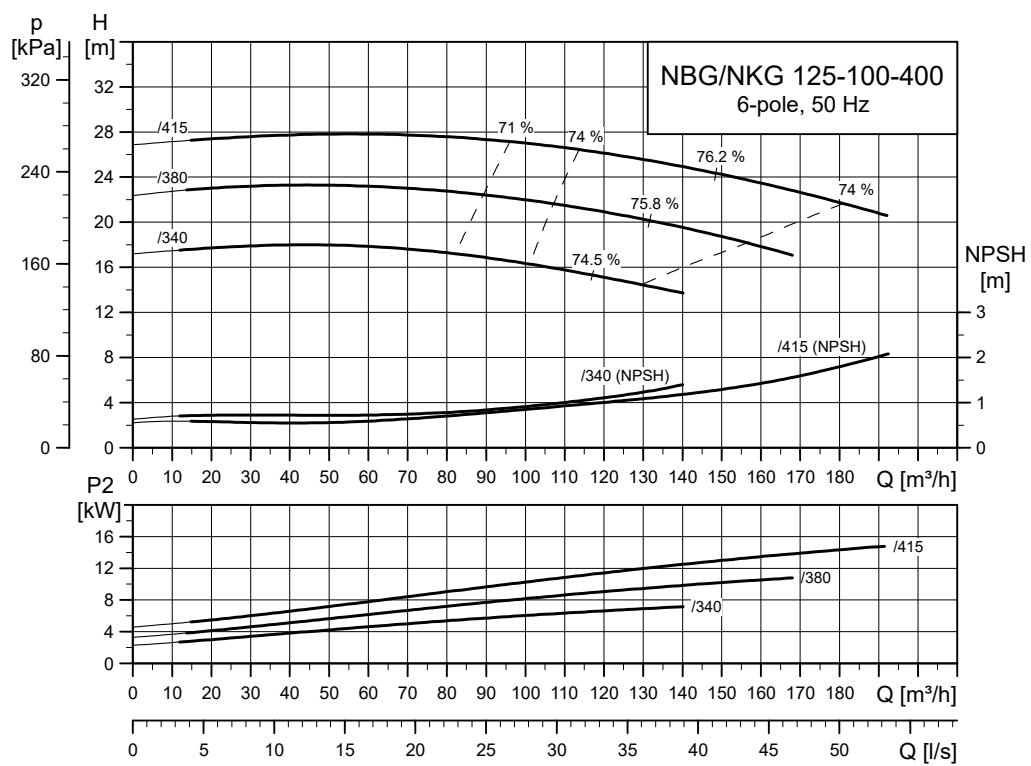
TM034981

NBG, NKG 125-100-250

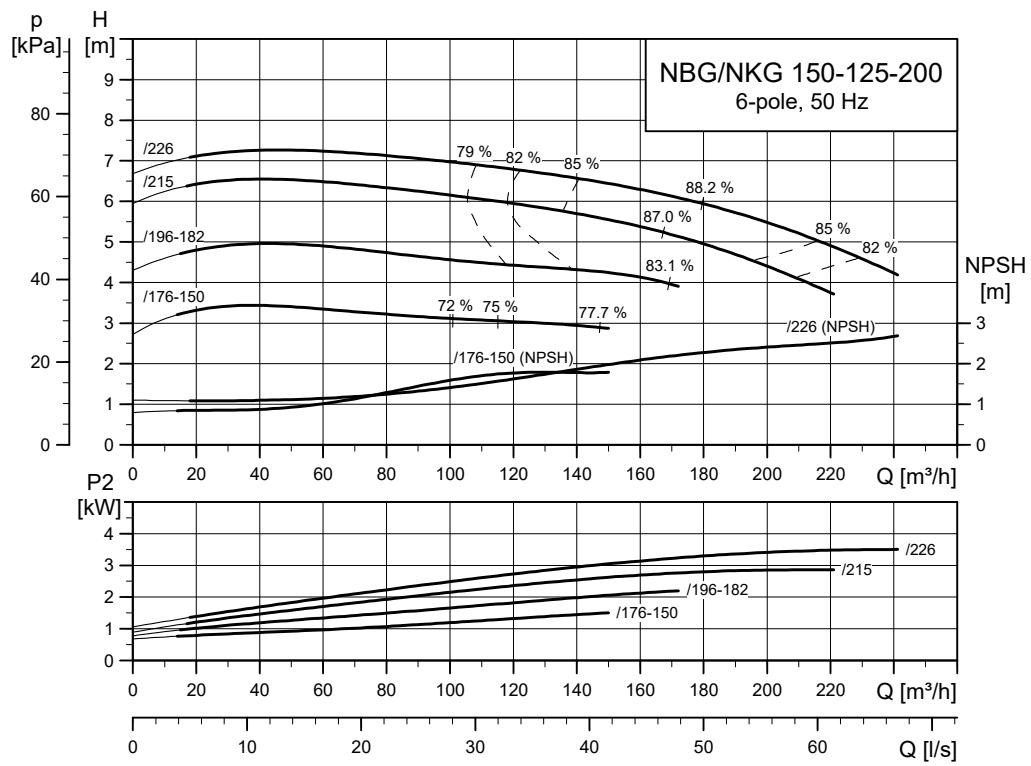
TM034982

NBG, NKG 125-100-315

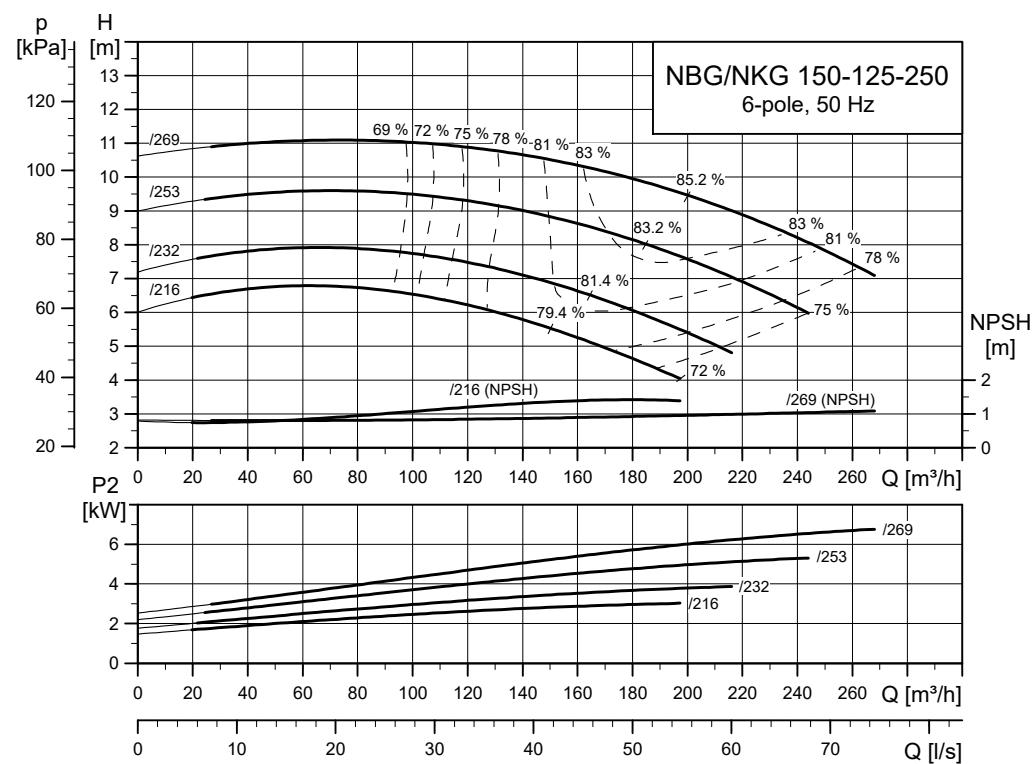
TM034983

NBG, NKG 125-100-400

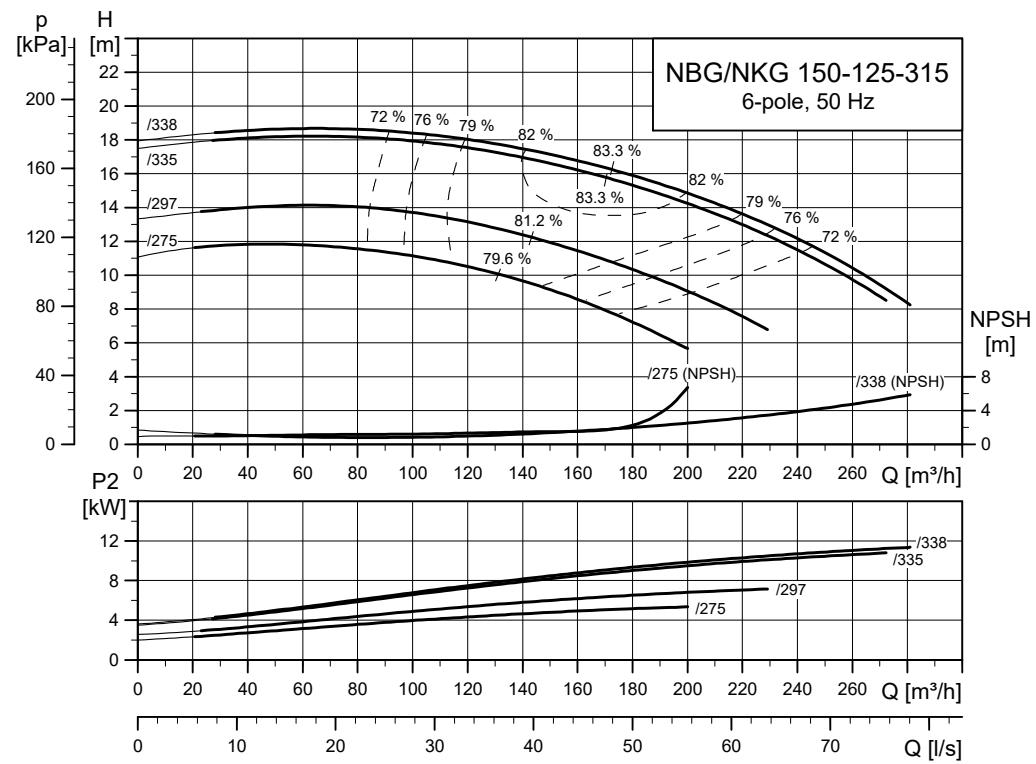
TM034984

NBG, NKG 150-125-200

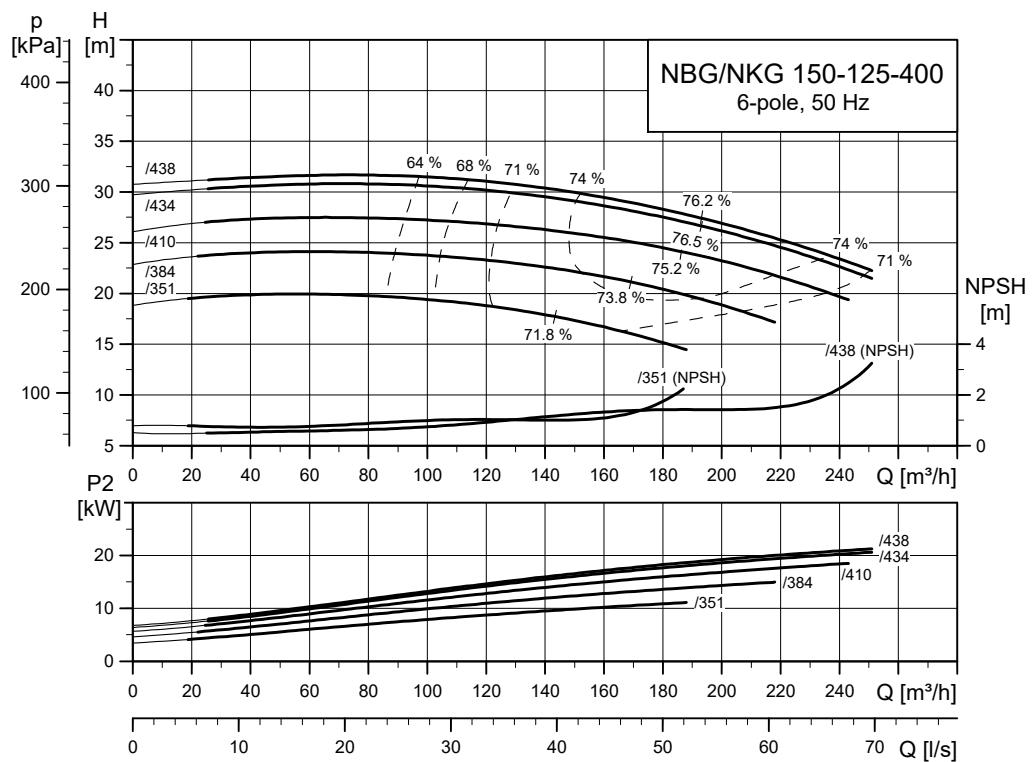
TM034985

NBG, NKG 150-125-250

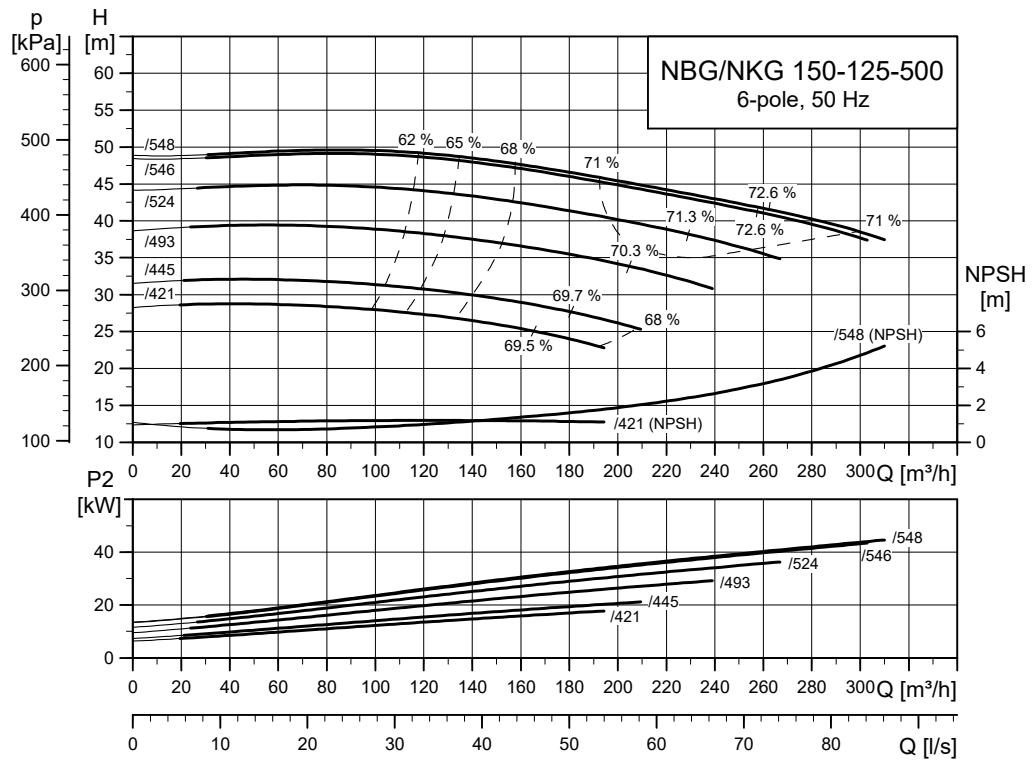
TM034986

NBG, NKG 150-125-315

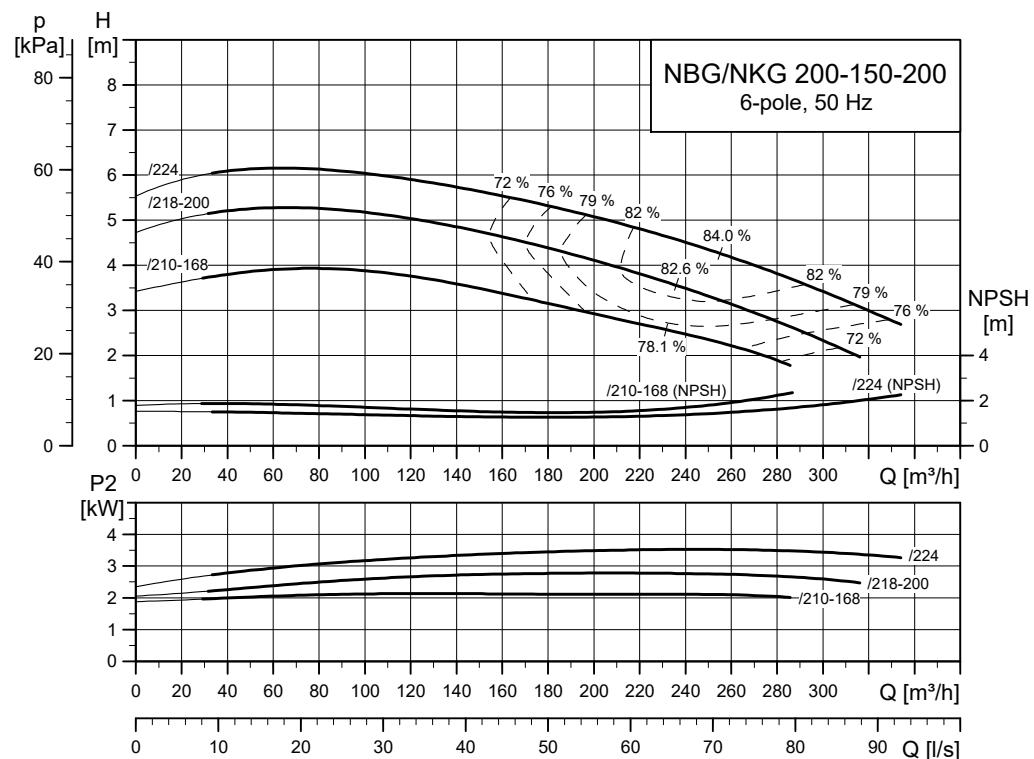
TM034987

NBG, NKG 150-125-400

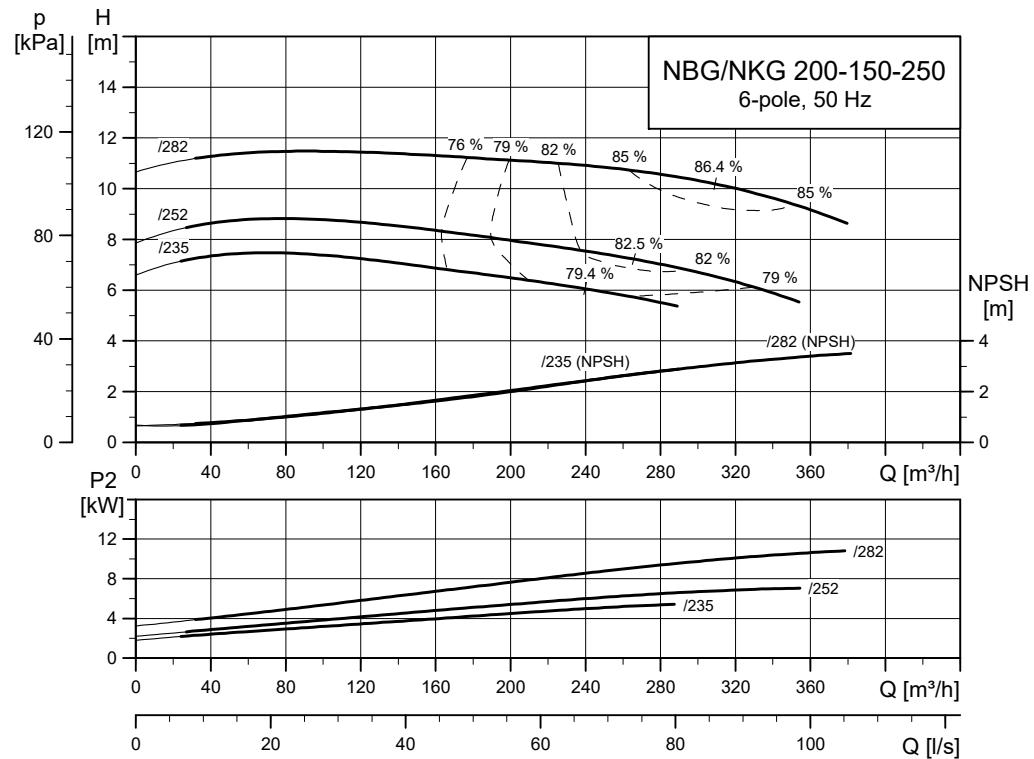
TM052344

NBG, NKG 150-125-500

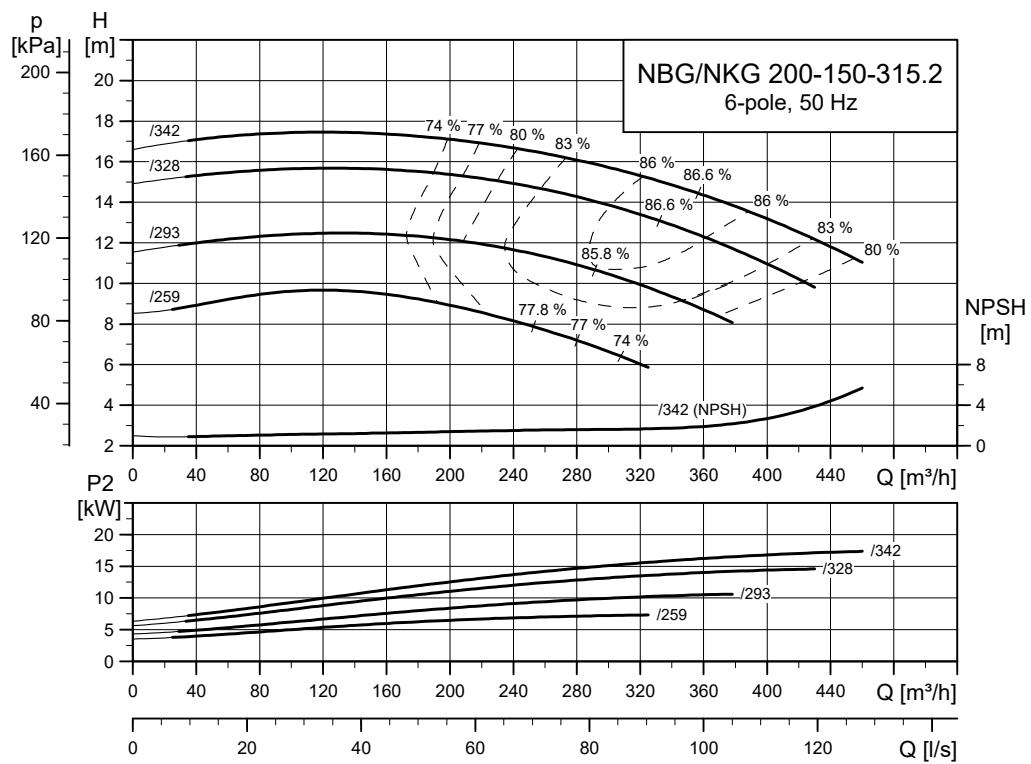
TM034989

NBG, NKG 200-150-200

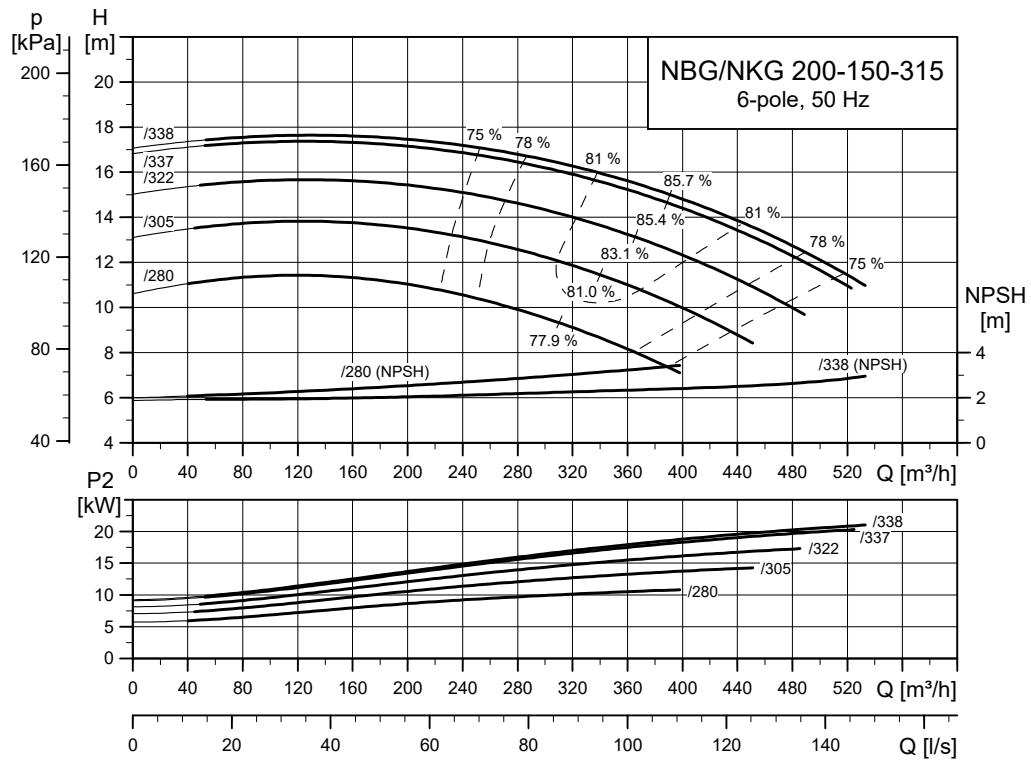
TM034990

NBG, NKG 200-150-250

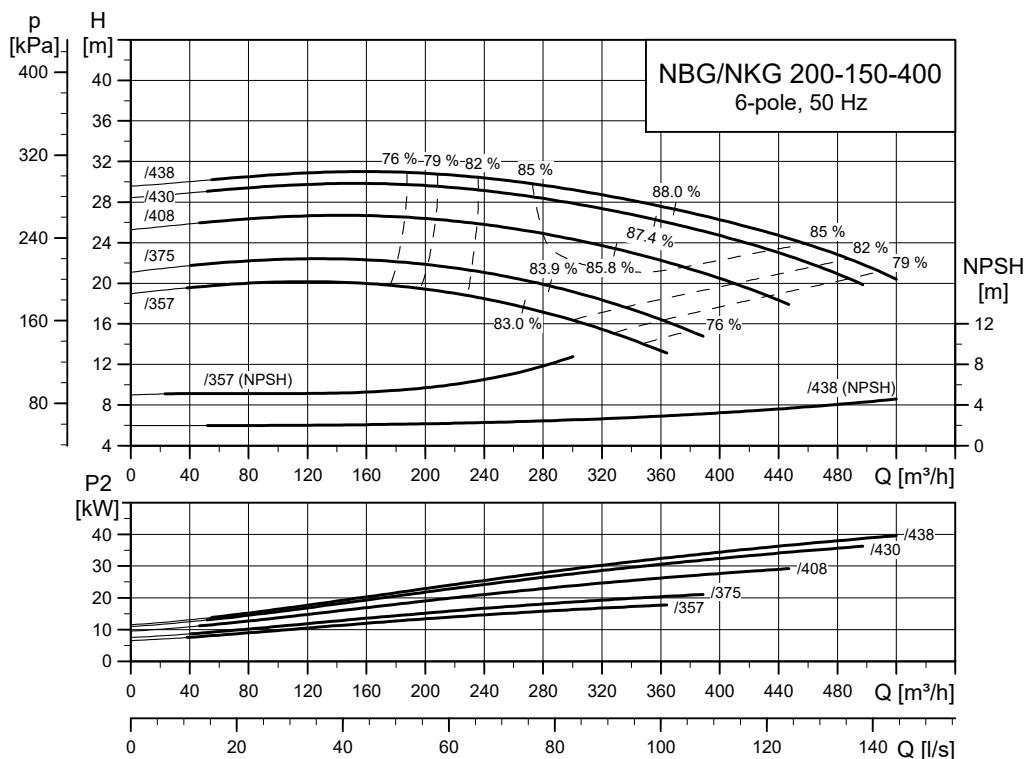
TM034991

NBG, NKG 200-150-315.2

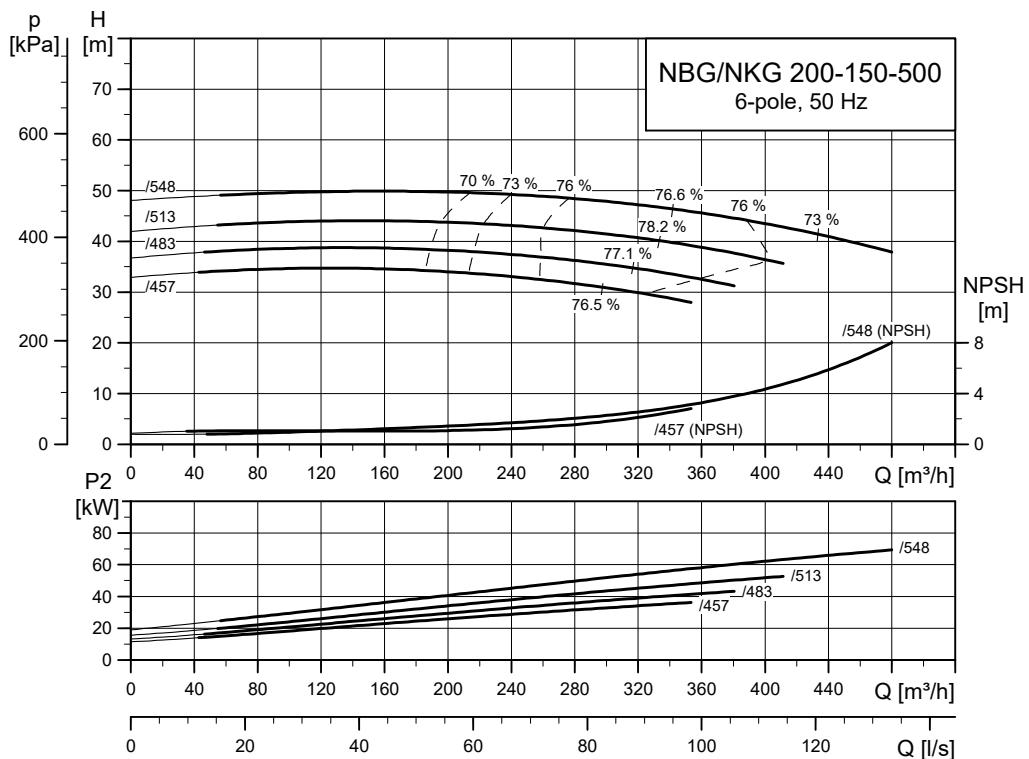
TM064757

NBG, NKG 200-150-315

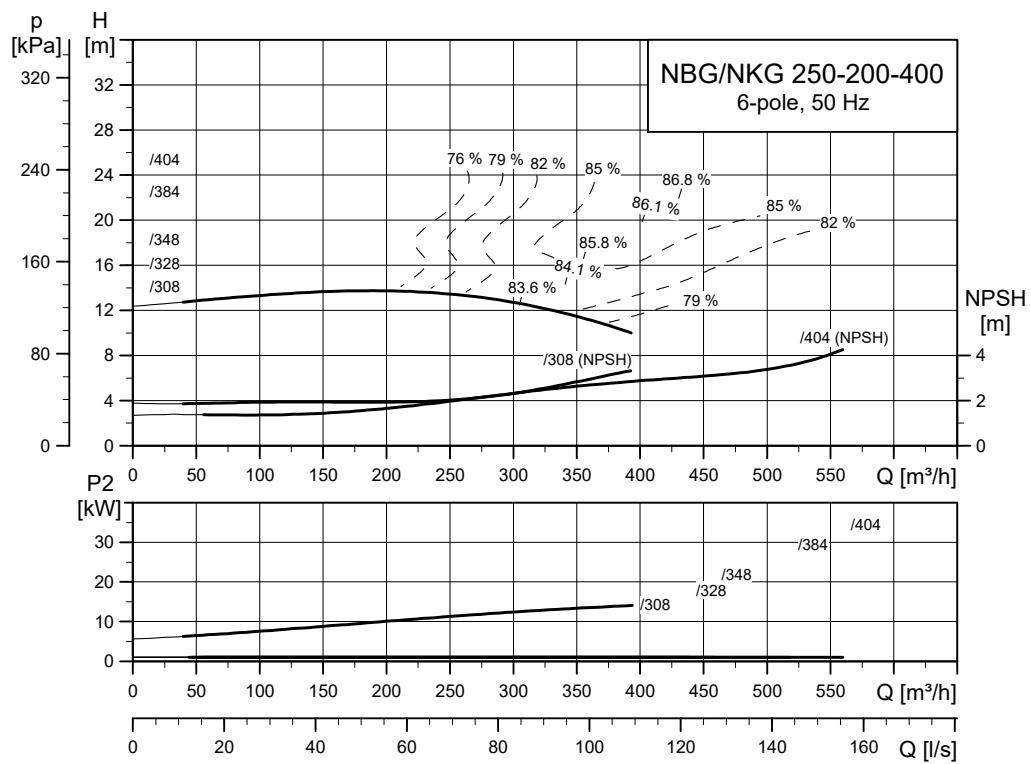
TM034992

NBG, NKG 200-150-400

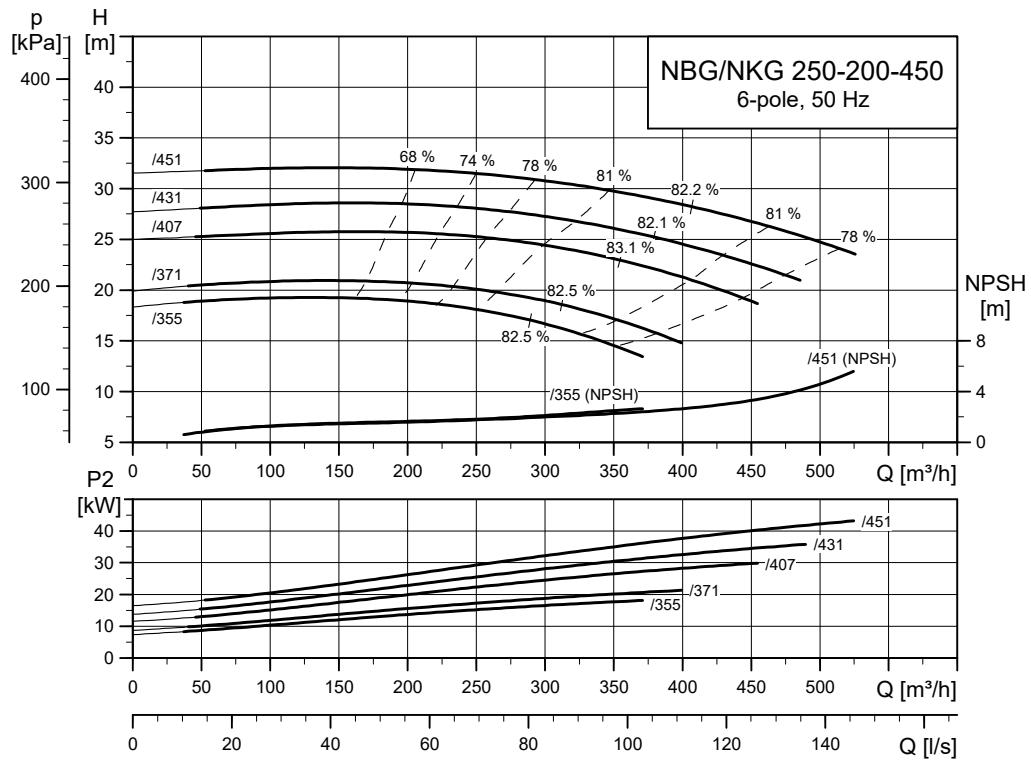
TM034993

NBG, NKG 200-150-500

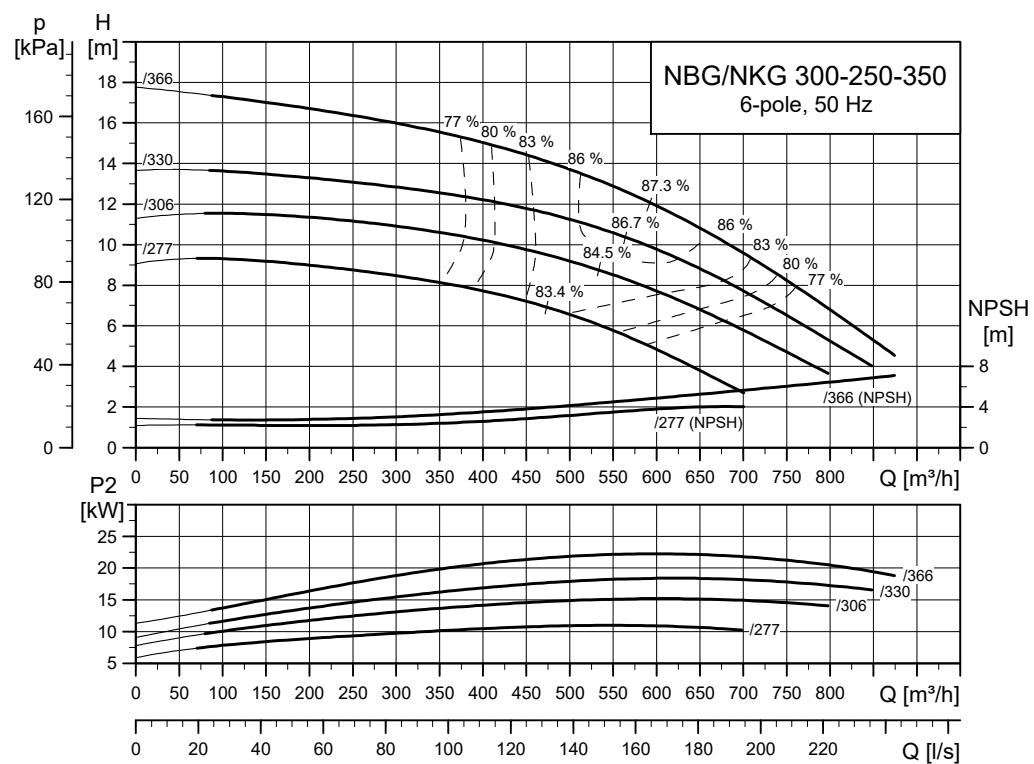
TM034994

NBG, NKG 250-200-400

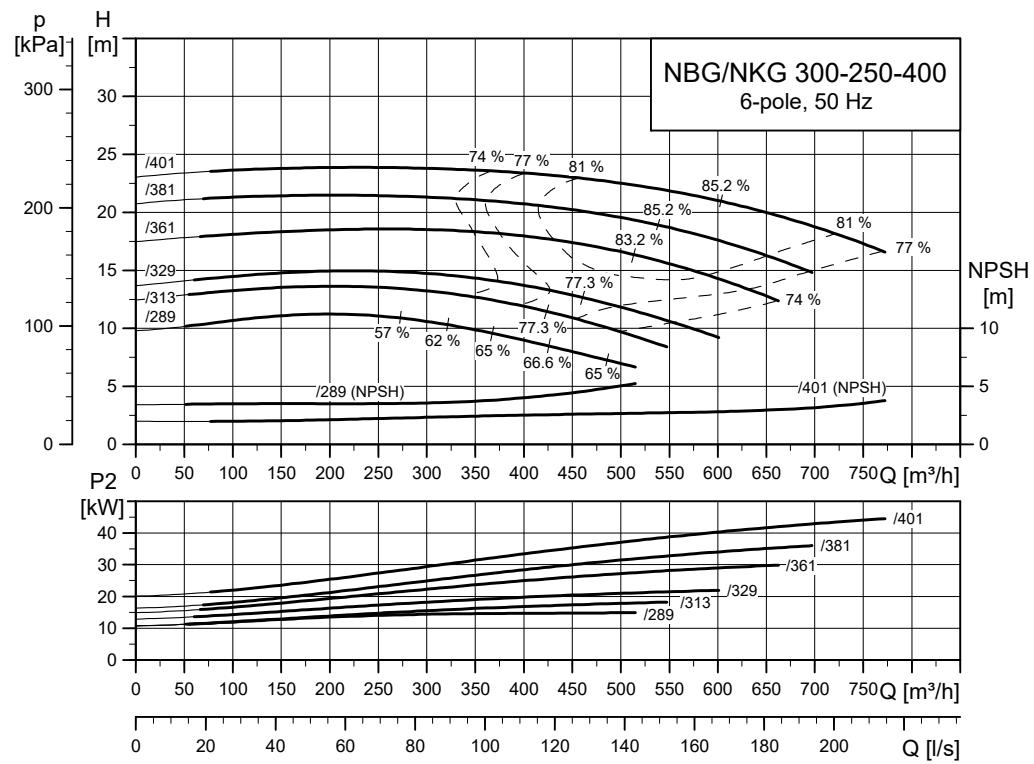
TM044944

NBG, NKG 250-200-450

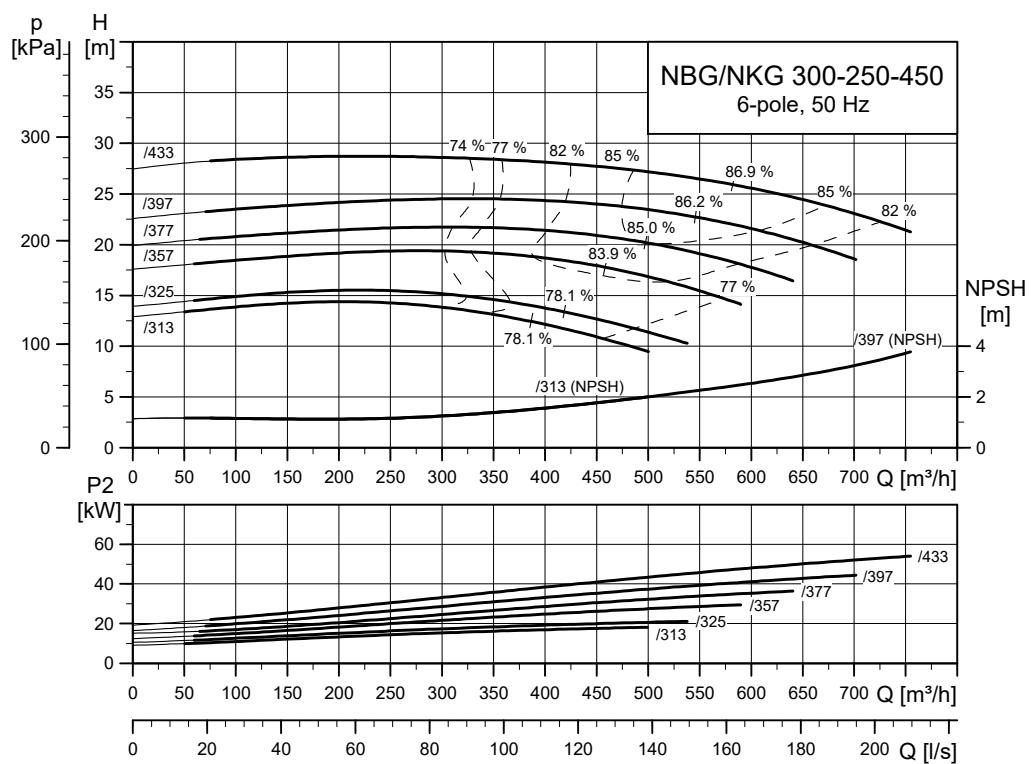
TM043964

NBG, NKG 300-250-350

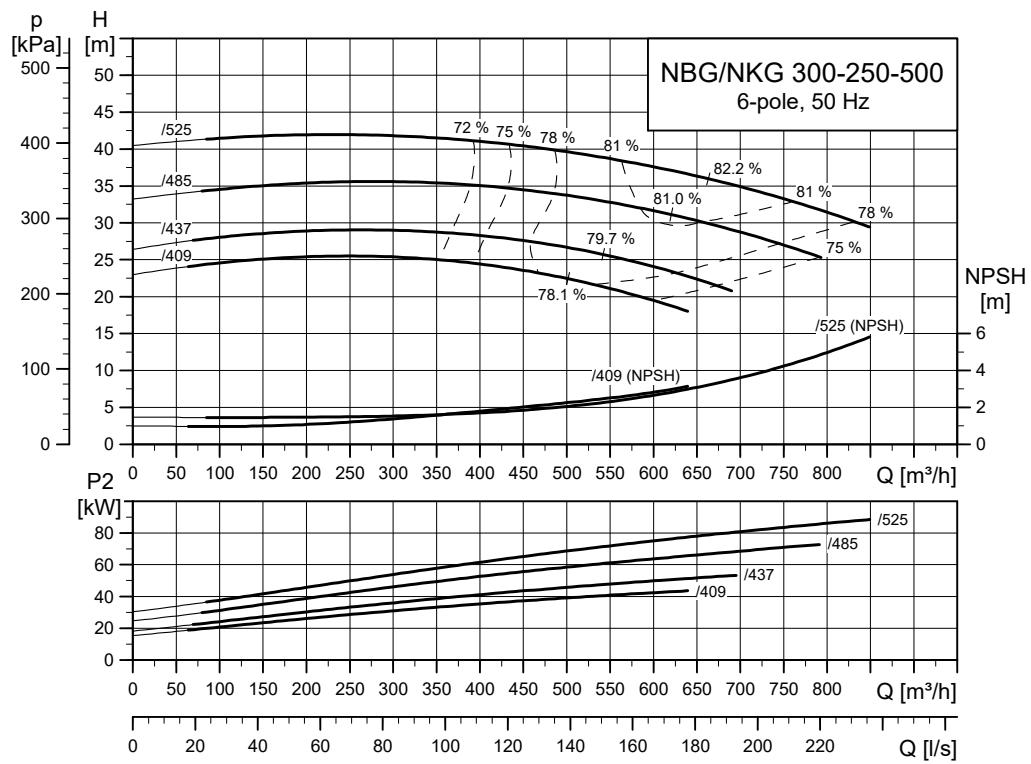
TM045963

NBG, NKG 300-250-400

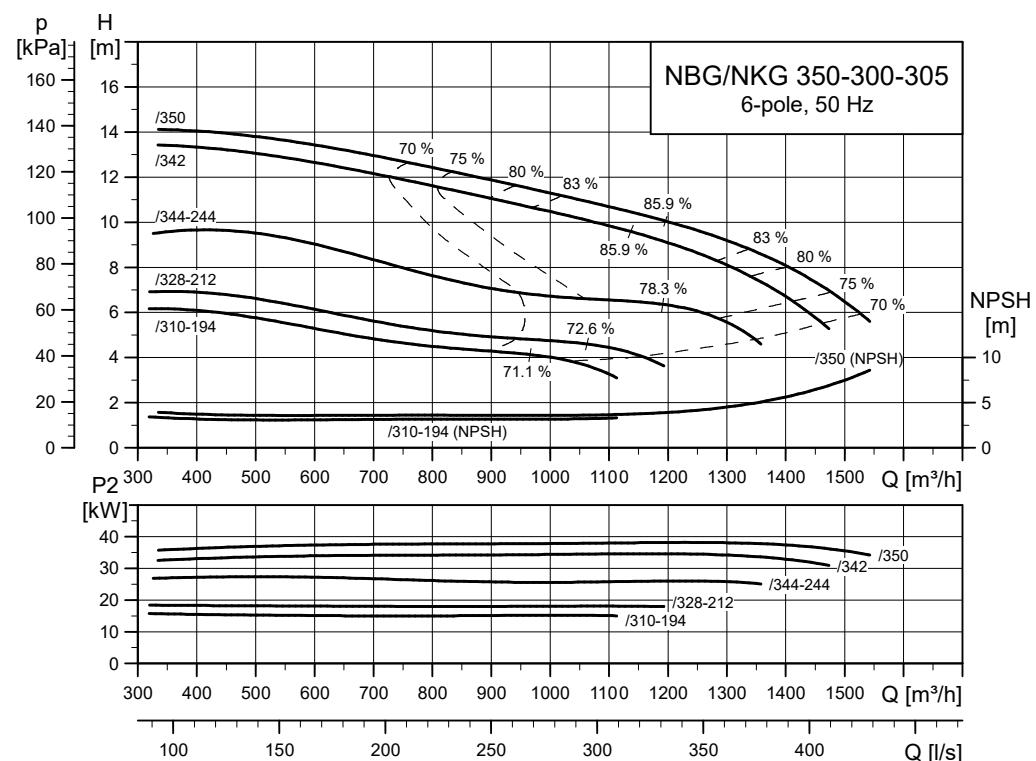
TM044019

NBG, NKG 300-250-450

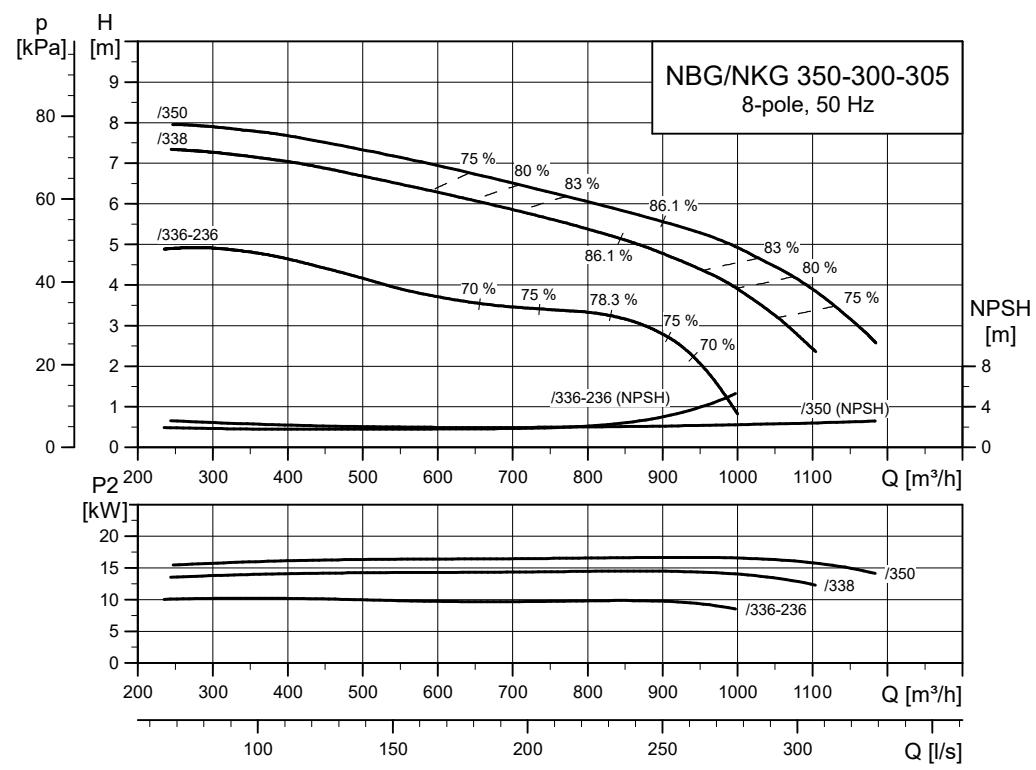
TM044948

NBG, NKG 300-250-500

TM045967

NBG, NKG 350-300-305

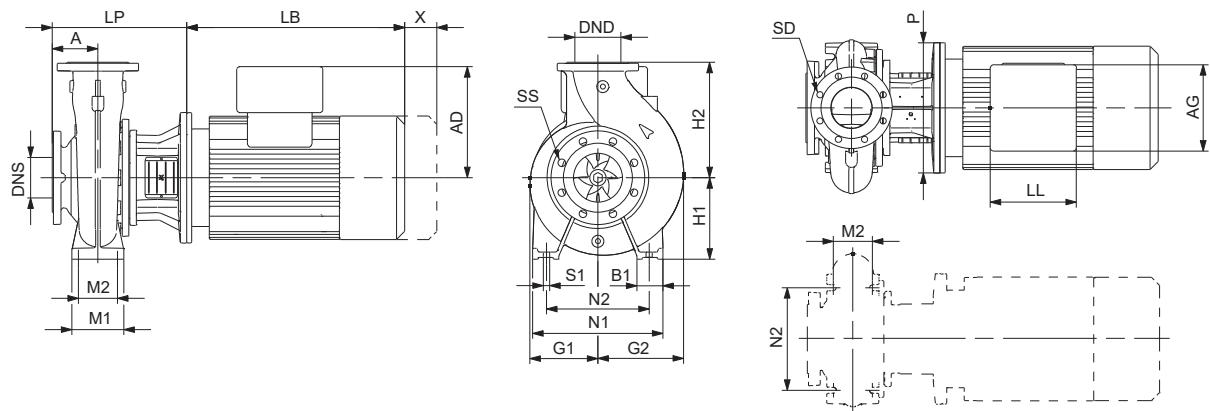
TM071265

8-pole**NBG, NKG 350-300-305**

TM071266

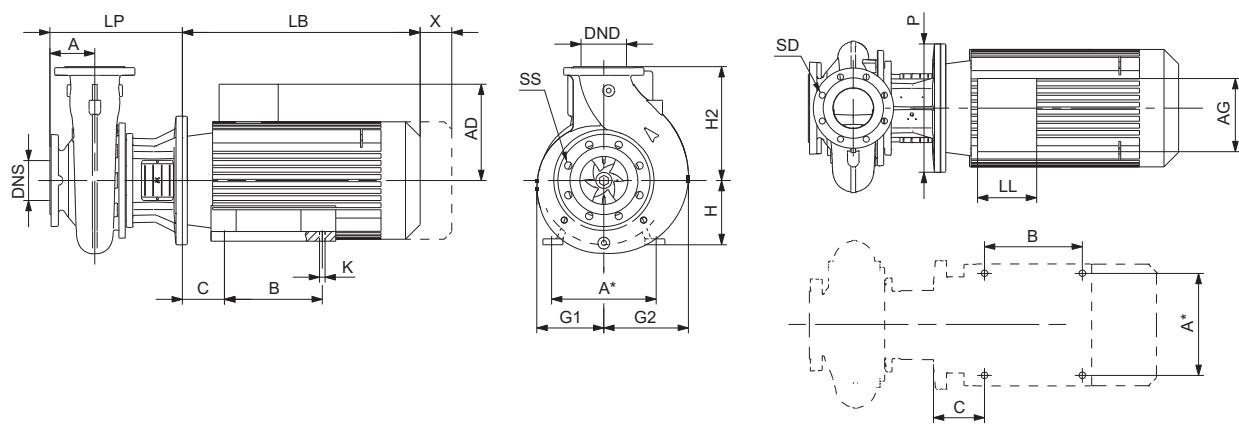
17. Dimensional drawings and dimensions

NBG, dimensional drawings



TM034180

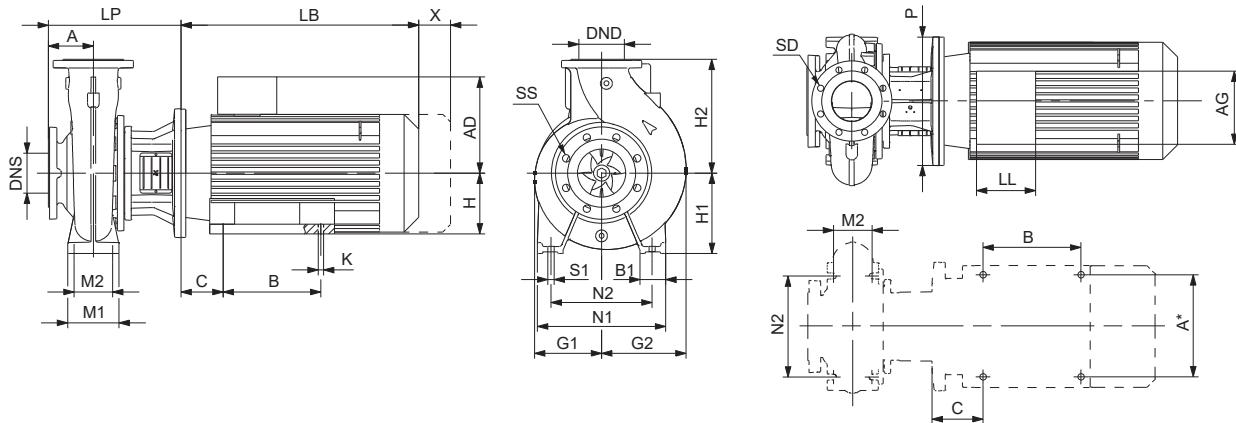
Mounting design A



TM034181

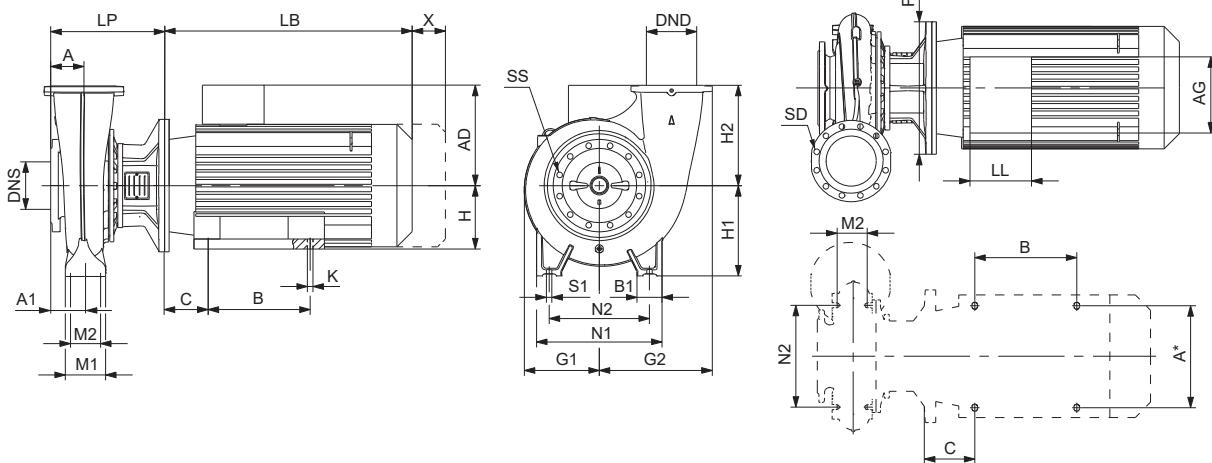
Mounting design B

Dimensional drawings and dimensions



TM034182

Mounting design C1, centre outlet



TM051432

Mounting design C2, tangential outlet

NBG dimensions

Standard motors in this table are IE3 motors:

- 2-pole: P2 less than or equal to 22 kW, pump with MG motor; P2 greater than or equal to 30 kW, pump with Siemens motor.
- 4-pole: P2 less than or equal to 15 kW, pump with MG motor; P2 greater than or equal to 18.5 kW, pump with Siemens motor.
- 6-pole: Pump with Siemens motor.
- 8-pole: Pump with Siemens motor.

E-motors in this table:

- 2-pole: P2 less than or equal to 22 kW, pump with MGE motor.
- 4-pole: P2 less than or equal to 22 kW, pump with MGE motor.

Pump size Poles P2 [kW]	Actual impeller size	Mounting design PN	NBG dimensions [mm]														LP CI SS	LB ³⁸⁾	LL ³⁸⁾	M1	M2	N1	N2	P	S1 ³⁹⁾	X ⁴⁰⁾							
			DNS	DND	SS	SD	A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K														
50-32-125.1	0.75	100	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	226	226	231/-	82/-	100	70	190	140	200	M12	100	
	1.1	110	A	16	50	32	4x19	4x19	80	-	109/158	82/268	50	-	-	112	140	-	117	117	-	226	226	251/274	82/232	100	70	190	140	200	M12	100	
	1.5	121	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	112	140	-	117	117	-	226	226	234/274	131/260	100	70	190	140	200	M12	100	
	2.2	140	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	112	140	-	117	117	-	226	226	274/261	131/260	100	70	190	140	200	M12	100	
	0.25	121	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100	
	4	0.25	139	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100
50-32-125	0.37	140	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100	
	1.1	106	A	16	50	32	4x19	4x19	80	-	109/158	82/268	50	-	-	112	140	-	117	117	-	226	226	251/274	82/232	100	70	190	140	200	M12	100	
	1.5	115	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	112	140	-	117	117	-	226	226	234/274	131/260	100	70	190	140	200	M12	100	
	2	2.2	130	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	112	140	-	117	117	-	226	226	274/261	131/260	100	70	190	140	200	M12	100
	3	142	A	16	50	32	4x19	4x19	80	-	120/201	162/222	50	-	-	112	140	-	117	117	-	254	254	335/334	103/280	100	70	190	140	250	M12	100	
	0.25	115	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100	
50-32-125.1	4	0.25	130	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100
	0.37	142	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	112	140	-	117	117	-	201	201	191/-	82/-	100	70	190	140	160	M12	100	
	1.5	139	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	132	160	-	117	123	-	226	226	234/274	131/260	100	70	240	190	200	M12	100	
	2	2.2	155	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	-	132	160	-	117	123	-	226	226	274/261	131/260	100	70	240	190	200	M12	100
	3	169	A	16	50	32	4x19	4x19	80	-	120/201	162/222	50	-	-	132	160	-	117	123	-	254	254	335/334	103/280	100	70	240	190	250	M12	100	
	4	177	A	16	50	32	4x19	4x19	80	-	134/201	202/208	50	-	-	132	160	-	117	123	-	254	254	372/334	103/280	100	70	240	190	250	M12	100	
50-32-160.1	0.25	137	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100	
	0.25	155	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100	
	4	0.37	172	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100
	0.55	177	A	16	50	32	4x19	4x19	80	-	109/158	82/268	50	-	-	132	160	-	117	123	-	226	226	231/274	82/232	100	70	240	190	200	M12	100	
	2	3	169	A	16	50	32	4x19	4x19	80	-	120/201	162/222	50	-	-	132	160	-	117	123	-	254	254	335/334	103/280	100	70	240	190	250	M12	100
	4	4	177	A	16	50	32	4x19	4x19	80	-	134/201	202/208	50	-	-	132	160	-	117	123	-	254	254	372/334	103/280	100	70	240	190	250	M12	100
50-32-160	0.25	137	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100	
	0.25	155	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100	
	4	0.37	172	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	123	-	201	201	191/-	82/-	100	70	240	190	160	M12	100
	0.55	177	A	16	50	32	4x19	4x19	80	-	134/201	202/228	50	-	-	132	160	-	117	125	-	293	293	391/365	103/280	100	70	240	190	300	M12	100	
	2	5.5	177	A	16	50	32	4x19	4x19	80	-	134/201	202/228	50	-	-	132	160	-	117	125	-	293	293	391/365	103/280	100	70	240	190	300	M12	100
	4	0.25	134	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	125	-	201	201	191/-	82/-	100	70	240	190	160	M12	100
50-32-200.1	0.37	154	A	16	50	32	4x19	4x19	80	-	109/-	82/-	50	-	-	132	160	-	117	125	-	201	201	191/-	82/-	100	70	240	190	160	M12	100	
	0.55	170	A	16	50	32	4x19	4x19	80	-	109/158	82/268	50	-	-	132	160	-	117	125	-	226	226	231/274	82/232	100	70	240	190	200	M12	100	
	2	0.75	173	A	16	50	32	4x19	4x19	80	-	106/174	166/261	50	-	-	132	160	-	117	125	-	226	226	234/312	131/281	100	70	240	190	200	M12	100
	3	172	A	16	50	32	4x19	4x19	80	-	120/201	162/222	50	-	-	160	180	-	135	137	-	254	254	335/334	103/280	100	70	240	190	250	M12	100	
	4	188	A	16	50	32	4x19	4x19	80	-	134/201	202/208	50	-	-	160	180	-	135	137	-	254	254	372/334	103/280	100	70	240	190	250	M12	100	
	5.5	205	A	16	50	32	4x19	4x19	80	-	134/201	202/228	50	-	-	160	180	-	135	137	-	293	293	391/365	103/280	100	70	240	190	300	M12	100	
50-32-200.1	7.5	207	A	16	50	32	4x19	4x19	80	-	159/237	203/227	50	-	-	160	180	-	135	137	-	293	293	379/389	135/317	100	70	240	19				

Pump size	Poles	Actual impeller size	Mounting design	Flanges		NBG dimensions [mm]													LP CI	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾					
				A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K	SS										
50-22-200	4	176	A	16	50	32	4x19	4x19	80	-	134/201	202/208	50	-	160	180	-	124	145	-	254	254	372/334	103/280	100 70 240 190 250 M12 100		
		5.5	190	A	16	50	32	4x19	4x19	80	-	134/201	202/228	50	-	160	180	-	124	145	-	293	293	391/365	103/280	100 70 240 190 300 M12 100	
	2	7.5	206	A	16	50	32	4x19	4x19	80	-	159/237	203/227	50	-	160	180	-	124	145	-	293	293	379/389	135/317	100 70 240 190 300 M12 100	
		11	219	C1	16	50	32	4x19	4x19	80	254	204/237	243/420	50	210	108	160	180	160	124	145	15	323	323	471/406	213/317	100 70 240 190 350 M12 100
	4	0.55	184	A	16	50	32	4x19	4x19	80	-	109/158	82/268	50	-	160	180	-	124	145	-	226	226	231/274	82/232	100 70 240 190 200 M12 100	
		0.75	197	A	16	50	32	4x19	4x19	80	-	106/174	166/261	50	-	160	180	-	124	145	-	226	226	234/312	131/281	100 70 240 190 200 M12 100	
	1.1	216	A	16	50	32	4x19	4x19	80	-	106/181	166/181	50	-	160	180	-	124	145	-	226	226	234/274	131/260	100 70 240 190 200 M12 100		
		1.5	219	A	16	50	32	4x19	4x19	80	-	110/158	162/177	50	-	160	180	-	124	145	-	226	226	321/274	103/232	100 70 240 190 200 M12 100	
	5.5	199	A	16	50	32	4x19	4x19	100	-	134/201	202/228	65	-	180	225	-	162	164	-	313	313	391/365	103/280	125 95 320 250 300 M12 100		
		7.5	219	A	16	50	32	4x19	4x19	100	-	159/237	203/227	65	-	180	225	-	162	164	-	313	313	379/389	135/317	125 95 320 250 300 M12 100	
	2	11	244	C1	16	50	32	4x19	4x19	100	254	204/237	243/420	65	210	108	180	225	160	162	164	15	343	343	471/406	213/317	125 95 320 250 350 M12 100
		15	262	C1	16	50	32	4x19	4x19	100	254	204/308	243/420	65	210	108	180	225	160	162	164	15	343	343	471/471	213/400	125 95 320 250 350 M12 100
50-22-250	0.75	206	A	16	50	32	4x19	4x19	100	-	106/174	166/261	65	-	180	225	-	162	164	-	273	273	234/312	131/281	125 95 320 250 200 M12 100		
		1.1	236	A	16	50	32	4x19	4x19	100	-	106/181	166/181	65	-	180	225	-	162	164	-	273	273	234/274	131/260	125 95 320 250 200 M12 100	
	1.5	257	A	16	50	32	4x19	4x19	100	-	110/158	162/177	65	-	180	225	-	162	164	-	273	273	321/274	103/232	125 95 320 250 200 M12 100		
		2.2	262	A	16	50	32	4x19	4x19	100	-	120/201	162/222	65	-	180	225	-	162	164	-	293	293	335/334	103/280	125 95 320 250 250 M12 100	
	5.5	172	A	16	65	40	4x19	4x19	100	-	134/201	202/228	50	-	160	180	-	140	157	-	313	313	391/365	103/280	100 70 265 212 300 M12 100		
		7.5	188	A	16	65	40	4x19	4x19	100	-	159/237	203/227	50	-	160	180	-	140	157	-	313	313	379/389	135/317	100 70 265 212 300 M12 100	
	2	11	206	B	16	65	40	4x19	4x19	100	254	204/237	243/420	-	210	108	-	180	160	140	157	15	343	343	471/406	213/317	- - - 350 - 100
		15	219	B	16	65	40	4x19	4x19	100	254	204/308	243/420	-	210	108	-	180	160	140	157	15	343	343	471/471	213/400	- - - 350 - 100
65-40-200	0.75	177	A	16	65	40	4x19	4x19	100	-	106/174	166/261	50	-	160	180	-	140	157	-	246	273	234/312	131/281	100 70 265 212 200 M12 100		
		1.1	198	A	16	65	40	4x19	4x19	100	-	106/181	166/181	50	-	160	180	-	140	157	-	246	273	234/274	131/260	100 70 265 212 200 M12 100	
	4	1.5	217	A	16	65	40	4x19	4x19	100	-	110/158	162/177	50	-	160	180	-	140	157	-	246	273	321/274	103/232	100 70 265 212 200 M12 100	
		2.2	219	A	16	65	40	4x19	4x19	100	-	120/201	162/222	50	-	160	180	-	140	157	-	274	293	335/334	103/280	100 70 265 212 250 M12 100	
	11	211	B	16	65	40	4x19	4x19	100	254	204/237	243/420	-	210	108	-	225	160	164	172	15	343	343	471/406	213/317	- - - 350 - 100	
		15	230	B	16	65	40	4x19	4x19	100	254	204/308	243/420	-	210	108	-	225	160	164	172	15	343	343	471/471	213/400	- - - 350 - 100
	2	18.5	245	B	16	65	40	4x19	4x19	100	254	204/308	243/420	-	254	108	-	225	160	164	172	15	343	343	515/515	213/400	- - - 350 - 100
		22	255	B	16	65	40	4x19	4x19	100	279	204/308	243/420	-	241	121	-	225	180	164	172	15	343	343	541/541	213/400	- - - 350 - 100
	30	30	260	B	16	65	40	4x19	4x19	100	318	315/-	265/-	-	305	133	-	225	200	164	172	19	343	343	611/-	197/-	- - - 400 - 100
		1.5	219	A	16	65	40	4x19	4x19	100	-	110/158	162/177	65	-	180	225	-	164	172	-	273	273	321/274	103/232	125 95 320 250 200 M12 100	
65-40-315	4	2.2	242	A	16	65	40	4x19	4x19	100	-	120/201	162/222	65	-	180	225	-	164	172	-	293	293	335/334	103/280	125 95 320 250 250 M12 100	
		3	260	A	16	65	40	4x19	4x19	100	-	120/201	162/222	65	-	180	225	-	164	172	-	293	293	335/334	103/280	125 95 320 250 250 M12 100	
	22	273	C1	16	65	40	4x19	4x19	125	279	204/308	243/420	65	241	121	200	250	180	200	206	15	398	398	541/541	213/400	125 95 345 280 350 M12 100	
		30	298	C1	16	65	40	4x19	4x19	125	318	315/-	265/-	65	305	133	200	250	200	206	19	398	398	611/-	197/-	125 95 345 280 400 M12 100	
	2	37	318	C1	16	65	40	4x19	4x19	125	318	315/-	265/-	65	305	133	200	250	200	206	19	398	398	636/-	197/-	125 95 345 280 400 M12 100	
		45	336	C1	16	65	40	4x19	4x19	125	356	338/-	266/-	65	286	149	200	250	225	200	206	19	398	398	708/-	197/-	125 95 345 280 450 M12 100
	45	344	C1	16	65	40	4x19	4x19	125	356	338/-	266/-	65	286	149	200	250	225	200	206	19	398	398	708/-	197/-	125 95 345 280 450 M12 100	
		3	283	A	16	65	40	8x19	4x19	125	-	120/201	162/222	65	-	200	250	-	200	206	-	348	348	335/334	103/280	125 95 345 280 250 M12 100	
65-50-125	4	4	305	A	16	65	40	4x19	4x19	125	-	134/201	202/208	65	-	200	250	-	200	206	-	348	348	372/334	103/280	125 95 345 280 250 M12 100	
		5.5	334	A	16	65	40	4x19	4x19	125	-	159/237	203/227	65	-	200	250	-	200	206	-	368	368	379/389	135/317	125 95 345 280 300 M12 100	
	7.5	344	A	16	65	40	4x19	4x19	125	-	159/237	203/227	65	-	200	250	-										

Pump size Poles P2 [kW]	Actual impeller size	Mounting design	NBG dimensions [mm]												LP CI SS	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾	
			PN	DNS	DND	SS	SD	A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2
65-50-160	4 144	A 16 65 50 4x19 4x19	80 -	134/201	202/208	50 -	-	132 160	-	117 134 -	-	254 273	372/334	103/280	100 70 240 190 250	M12	100		
	5.5 158	A 16 65 50 4x19 4x19	80 -	134/201	202/228	50 -	-	132 160	-	117 134 -	-	293 293	391/365	103/280	100 70 240 190 300	M12	100		
	7.5 172	A 16 65 50 4x19 4x19	80 -	159/237	203/227	50 -	-	132 160	-	117 134 -	-	293 293	379/389	135/317	100 70 240 190 300	M12	100		
	11 177	C1 16 65 50 4x19 4x19	80 254	204/237	243/420	50 210 108	132 160 160 117 134 15	323 323	471/406	213/317	100 70 240 190 350	M12	100						
	0.37 134	A 16 65 50 4x19 4x19	80 -	109/-	82/-	50 -	-	132 160	-	117 134 -	-	201 243	191/-	82/-	100 70 240 190 160	M12	100		
	0.55 151	A 16 65 50 4x19 4x19	80 -	109/158	82/268	50 -	-	132 160	-	117 134 -	-	226 253	231/274	82/232	100 70 240 190 200	M12	100		
	0.75 162	A 16 65 50 4x19 4x19	80 -	106/174	166/261	50 -	-	132 160	-	117 134 -	-	226 253	234/312	131/281	100 70 240 190 200	M12	100		
	1.1 177	A 16 65 50 4x19 4x19	80 -	106/181	166/181	50 -	-	132 160	-	117 134 -	-	226 253	234/274	131/260	100 70 240 190 200	M12	100		
80-50-200	11 181	B 16 80 50 8x19 4x19	100 254	204/237	243/420	- 210 108	- 200 160 142 163 15	343 343	471/406	213/317	- - - -	350 -	-	-	-	-	-	-	100
	15 198	B 16 80 50 8x19 4x19	100 254	204/308	243/420	- 210 108	- 200 160 142 163 15	343 343	471/471	213/400	- - - -	350 -	-	-	-	-	-	-	100
	18.5 210	B 16 80 50 8x19 4x19	100 254	204/308	243/420	- 254 108	- 200 160 142 163 15	343 343	515/515	213/400	- - - -	350 -	-	-	-	-	-	-	100
	22 219	B 16 80 50 8x19 4x19	100 279	204/308	243/420	- 241 121	- 200 180 142 163 15	343 343	541/541	213/400	- - - -	350 -	-	-	-	-	-	-	100
	1.1 171	A 16 80 50 8x19 4x19	100 -	106/181	166/181	50 -	-	160 200	-	142 163 -	-	246 273	234/274	131/260	100 70 265 212 200	M12	100		
	1.5 188	A 16 80 50 8x19 4x19	100 -	110/158	162/177	50 -	-	160 200	-	142 163 -	-	246 273	321/274	103/232	100 70 265 212 200	M12	100		
	2.2 210	A 16 80 50 8x19 4x19	100 -	120/201	162/222	50 -	-	160 200	-	142 163 -	-	274 293	335/334	103/280	100 70 265 212 250	M12	100		
	3 219	A 16 80 50 8x19 4x19	100 -	120/201	162/222	50 -	-	160 200	-	142 163 -	-	274 293	335/334	103/280	100 70 265 212 250	M12	100		
80-50-250	15 205	B 16 80 50 8x19 4x19	125 254	204/308	243/420	- 210 108	- 225 160 164 180 15	368 368	471/471	213/400	- - - -	350 -	-	-	-	-	-	-	100
	18.5 222	B 16 80 50 8x19 4x19	125 254	204/308	243/420	- 254 108	- 225 160 164 180 15	368 368	515/515	213/400	- - - -	350 -	-	-	-	-	-	-	100
	2 22 233	B 16 80 50 8x19 4x19	125 279	204/308	243/420	- 241 121	- 225 180 164 180 15	368 368	541/541	213/400	- - - -	350 -	-	-	-	-	-	-	100
	30 254	B 16 80 50 8x19 4x19	125 318	315/-	265/-	- 305 133	- 225 200 164 180 19	368 368	611/-	197/-	- - - -	400 -	-	-	-	-	-	-	100
	37 263	B 16 80 50 8x19 4x19	125 318	315/-	265/-	- 305 133	- 225 200 164 180 19	368 368	636/-	197/-	- - - -	400 -	-	-	-	-	-	-	100
	2.2 221	A 16 80 50 8x19 4x19	125 -	120/201	162/222	65 -	-	180 225	-	164 180 -	-	318 318	335/334	103/280	125 95 320 250 250	M12	100		
	4 3 241	A 16 80 50 8x19 4x19	125 -	120/201	162/222	65 -	-	180 225	-	164 180 -	-	318 318	335/334	103/280	125 95 320 250 250	M12	100		
	4 263	A 16 80 50 8x19 4x19	125 -	134/201	202/208	65 -	-	180 225	-	164 180 -	-	318 318	372/334	103/280	125 95 320 250 250	M12	100		
80-50-315	30 267	C1 16 80 50 8x19 4x19	125 318	315/-	265/-	65 305 133 225 280	200 203 214 19	398 398	611/-	197/-	125 95 345 280 400	M12	100						
	37 285	C1 16 80 50 8x19 4x19	125 318	315/-	265/-	65 305 133 225 280	200 203 214 19	398 398	636/-	197/-	125 95 345 280 400	M12	100						
	2 45 300	C1 16 80 50 8x19 4x19	125 356	338/-	266/-	65 286 149 225 280	225 203 214 19	428 428	708/-	197/-	125 95 345 280 450	M12	100						
	55 321	C1 16 80 50 8x19 4x19	125 406	410/-	319/-	65 349 168 225 280	250 203 214 24	428 428	747/-	233/-	125 95 345 280 550	M12	100						
	75 344	C1 25 80 50 8x19 8x19	125 457	433/-	319/-	65 368 190 225 280	280 203 214 24	428 428	820/-	233/-	125 95 345 280 550	M12	100						
	4 277	A 16 80 50 8x19 4x19	125 -	134/201	202/208	65 -	-	225 280	-	203 214 -	-	348 348	372/334	103/280	125 95 345 280 250	M12	100		
	5.5 303	A 16 80 50 8x19 4x19	125 -	159/237	203/227	65 -	-	225 280	-	203 214 -	-	368 368	379/389	135/317	125 95 345 280 300	M12	100		
	7.5 331	A 16 80 50 8x19 4x19	125 -	159/237	203/227	65 -	-	225 280	-	203 214 -	-	368 368	429/389	135/317	125 95 345 280 300	M12	100		
80-65-125	11 344	C1 16 80 50 8x19 4x19	125 254	204/308	243/420	65 210 108 225 280	160 203 214 15	398 398	545/471	213/400	125 95 345 280 350	M12	100						
	3 111	A 16 80 65 8x19 4x19	100 -	120/201	162/222	50 -	-	132 160	-	117 131 -	-	274 293	335/334	103/280	100 70 240 190 250	M12	100		
	4 121	A 16 80 65 8x19 4x19	100 -	134/201	202/208	50 -	-	132 160	-	117 131 -	-	274 293	372/334	103/280	100 70 240 190 250	M12	100		
	5.5 135	A 16 80 65 8x19 4x19	100 -	134/201	202/228	50 -	-	132 160	-	117 131 -	-	313 313	391/365	103/280	100 70 240 190 300	M12	100		
	7.5 144	A 16 80 65 8x19 4x19	100 -	159/237	203/227	50 -	-	132 160	-	117 131 -	-	313 313	379/389	135/317	100 70 240 190 300	M12	100		
	0.37 112	A 16 80 65 8x19 4x19	100 -	109/-	82/-	50 -	-	132 160	-	117 131 -	-	221 263	191/-	82/-	100 70 240 190 160	M12	100		
	0.55 125	A 16 80 65 8x19 4x19	100 -	109/158	82/268	50 -	-	132 160	-	117 131 -	-	246 273	231/274	82/232	100 70 240 190 200	M12	100		
	0.75 138	A 16 80 65 8x19 4x19	100 -	106/174	166/261	50 -	-	132 160	-	117 131 -	-	246 273	234/312	131/281	100 70 240 190 200	M12	100		
80-65-160	1.1 144	A 16 80 65 8x19 4x19	100 -	106/181	166/181	50 -	-	132 160	-	117 131 -	-	246 273	234/274	131/260	100 70 240 190 200	M12	100		
	5.5 136	A 16 80 65 8x19 4x19	100 -	134/201	202/228	50 -	-	160 180	-	125 151 -	-	313 313	391/365	103/280	100 70 264 212 300	M12	100		
	7.5 150	A 16 80 65 8x19 4x19	100 -	159/237	203/227	50 -	-	160 180	-	125 151 -	-	313 313	379/389	135/317	100 70 264 212 300	M12	100		
	11 167	B 16 80 65 8x19 4x19	100 254	204/237	243/420	- 210 108	- 180 160 125 151 15	343 343	471/406	213/317	- - - -	350 -	-	-	-	-	-	-	100
	15 177	B 16 80 65 8x19 4x19	100 254	204/308	243/420	- 210 108	- 180 160 125 151 15	343 343	471/471	213/400	- - - -	350 -	-	-	-	-	-	-	100
	0.55 131	A 16 80 65 8x19 4x19	100 -	109/158	82/268	50 -	-	160 180	-	125 151 -	-	246 273	231/274	82/232	100 70 264 212 200	M12	100		
	0.75 139	A 16 80 65 8x19 4x19	100 -	106/174	166/261	50 -	-	160 180	-	125 151 -	-	246 273	234/312	131/281	100 70 264 212 200	M12	100		
	4 1.1 158	A 16 80 65 8x19 4x19	100 -	106/181	166/181	50 -	-	160 180	-	125 151 -	-	246 273	234/274	131/260	100 70 264 212 200	M12	100		
	1.5 175	A 16 80 65 8x19 4x19	100 -	110/158	162/177	50 -	-	160 180	-	125 151 -	-	246 273	321/274	103/232	100 70 264 212 200	M12	100		
	2.2 177	A 16 80 65 8x19 4x19	100 -	120/20															

Pump size	Poles	Actual impeller size	Mounting design	Flanges		NBG dimensions [mm]													LP CI SS	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾
				A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K						
100-65-200	11	162	B	16 100 65 8x19 4x19	100 254	204/237	243/420	- 210 108	- 225 160 149 173 15	343 343	471/406 213/317	- - - - 350 -	140									
	15	177	B	16 100 65 8x19 4x19	100 254	204/308	243/420	- 210 108	- 225 160 149 173 15	343 343	471/471 213/400	- - - - 350 -	140									
	2	18.5 190	B	16 100 65 8x19 4x19	100 254	204/308	243/420	- 254 108	- 225 160 149 173 15	343 343	515/515 213/400	- - - - 350 -	140									
	22	198	B	16 100 65 8x19 4x19	100 279	204/308	243/420	- 241 121	- 225 180 149 173 15	343 343	541/541 213/400	- - - - 350 -	140									
	30	217	B	16 100 65 8x19 4x19	100 318	315/-	265/-	- 305 133	- 225 200 149 173 19	343 343	611/- 197/-	- - - - 400 -	140									
	37	219	B	16 100 65 8x19 4x19	100 318	315/-	265/-	- 305 133	- 225 200 149 173 19	343 343	636/- 197/-	- - - - 400 -	140									
	1.5	170	A	16 100 65 8x19 4x19	100 -	110/158	162/177 65 -	- 180 225	- 149 173 -	273 273	321/274 103/232	125 95 320 250 200 M12	140									
	2.2	189	A	16 100 65 8x19 4x19	100 -	120/201	162/222 65 -	- 180 225	- 149 173 -	293 293	335/334 103/280	125 95 320 250 250 M12	140									
	4	3 205	A	16 100 65 8x19 4x19	100 -	120/201	162/222 65 -	- 180 225	- 149 173 -	293 293	335/334 103/280	125 95 320 250 250 M12	140									
	4	219	A	16 100 65 8x19 4x19	100 -	134/201	202/208 65 -	- 180 225	- 149 173 -	293 293	372/334 103/280	125 95 320 250 250 M12	140									
100-65-250	30	223	C1	16 100 65 8x19 4x19	125 318	315/-	265/-	80 305 133 200 250 200 183 200 19	398 398	611/- 197/-	160 120 360 280 400 M16	140										
	37	238	C1	16 100 65 8x19 4x19	125 318	315/-	265/-	80 305 133 200 250 200 183 200 19	398 398	636/- 197/-	160 120 360 280 400 M16	140										
	2	45 251	C1	16 100 65 8x19 4x19	125 356	338/-	266/-	80 286 149 200 250 225 183 200 19	428 428	708/- 197/-	160 120 360 280 450 M16	140										
	55	269	C1	16 100 65 8x19 4x19	125 406	410/-	319/-	80 349 168 200 250 250 183 200 24	428 428	747/- 233/-	160 120 360 280 550 M16	140										
	75	270	C1	16 100 65 8x19 4x19	125 457	433/-	319/-	80 368 190 200 250 280 183 200 24	428 428	820/- 233/-	160 120 360 280 550 M16	140										
	3	215	A	16 100 65 8x19 4x19	125 -	120/201	162/222 80 -	- 200 250	- 183 200 -	348 348	335/334 103/280	160 120 360 280 250 M16	140									
	4	232	A	16 100 65 8x19 4x19	125 -	134/201	202/208 80 -	- 200 250	- 183 200 -	348 348	372/334 103/280	160 120 360 280 250 M16	140									
	5.5	254	A	16 100 65 8x19 4x19	125 -	159/237	203/227 80 -	- 200 250	- 183 200 -	368 368	379/389 135/317	160 120 360 280 300 M16	140									
	7.5	270	A	16 100 65 8x19 4x19	125 -	159/237	203/227 80 -	- 200 250	- 183 200 -	368 368	429/389 135/317	160 120 360 280 300 M16	140									
	55	272	C1	16 100 65 8x19 4x19	125 406	410/-	319/-	80 349 168 225 280 250 211 219 24	426 426	747/- 233/-	160 120 400 315 550 M16	140										
	75	295	C1	16 100 65 8x19 4x19	125 457	433/-	319/-	80 368 190 225 280 280 211 219 24	426 426	820/- 233/-	160 120 400 315 550 M16	140										
100-65-315	90	308	C1	16 100 65 8x19 4x19	125 457	433/-	319/-	80 368 190 225 280 280 211 219 24	426 426	930/- 233/-	160 120 400 315 550 M16	140										
	110	320	C1	16 100 65 8x19 4x19	125 508	515/-	374/-	80 406 216 225 280 315 211 219 28	456 456	912/- 299/-	160 120 400 315 660 M16	140										
	5.5	261	A	16 100 65 8x19 4x19	125 -	159/237	203/227 80 -	- 225 280	- 211 219 -	366 366	379/389 135/317	160 120 400 315 300 M16	140									
	7.5	282	A	16 100 65 8x19 4x19	125 -	159/237	203/227 80 -	- 225 280	- 211 219 -	366 366	429/389 135/317	160 120 400 315 300 M16	140									
	11	314	C1	16 100 65 8x19 4x19	125 254	204/308	243/420	80 210 108 225 280 160 211 219 15	396 396	545/471 213/400	160 120 400 315 350 M16	140										
	15	320	C1	16 100 65 8x19 4x19	125 254	204/308	243/420	80 254 108 225 280 160 211 219 15	396 396	575/515 213/400	160 120 400 315 350 M16	140										
	4	120-110	A	16 100 80 8x19 8x19	100 -	134/201	202/208 65 -	- 160 180	- 117 146 -	274 293	372/334 103/280	125 95 280 212 250 M12	100									
	5.5	127	A	16 100 80 8x19 8x19	100 -	134/201	202/228 65 -	- 160 180	- 117 146 -	313 313	391/365 103/280	125 95 280 212 300 M12	100									
	2	7.5 137	A	16 100 80 8x19 8x19	100 -	159/237	203/227 65 -	- 160 180	- 117 146 -	313 313	379/389 135/317	125 95 280 212 300 M12	100									
	11	144	C1	16 100 80 8x19 8x19	100 254	204/237	243/420	65 210 108 160 180 160 117 146 15	343 343	471/406 213/317	125 95 280 212 350 M12	100										
100-80-125	0.55	121	A	16 100 80 8x19 8x19	100 -	109/158	82/268 65 -	- 160 180	- 117 146 -	246 273	231/274 82/232	125 95 280 212 200 M12	100									
	4	0.75 130	A	16 100 80 8x19 8x19	100 -	106/174	166/261 65 -	- 160 180	- 117 146 -	246 273	234/312 131/281	125 95 280 212 200 M12	100									
	1.1	144	A	16 100 80 8x19 8x19	100 -	106/181	166/181 65 -	- 160 180	- 117 146 -	246 273	234/274 131/260	125 95 280 212 200 M12	100									
	7.5	143	A	16 100 80 8x19 8x19	100 -	159/237	203/227 65 -	- 160 200	- 127 161 -	313 313	379/389 135/317	125 95 280 212 300 M12	100									
	2	11 157	B	16 100 80 8x19 8x19	100 254	204/237	243/420	- 210 108	- 200 160 127 161 15	343 343	471/406 213/317	- - - - 350 -	100									
	15	173	B	16 100 80 8x19 8x19	100 254	204/308	243/420	- 210 108	- 200 160 127 161 15	343 343	471/471 213/400	- - - - 350 -	100									
	18.5	177	B	16 100 80 8x19 8x19	100 254	204/308	243/420	- 254 108	- 200 160 127 161 15	343 343	515/515 213/400	- - - - 350 -	100									
	0.75	135	A	16 100 80 8x19 8x19	100 -	106/174	166/261 65 -	- 160 200	- 127 161 -	273 273	234/312 131/281	125 95 280 212 200 M12	100									
	4	1.1 149	A	16 100 80 8x19 8x19	100 -	106/181	166/181 65 -	- 160 200	- 127 161 -	273 273	234/274 131/260	125 95 280 212 200 M12	100									
	1.5	165	A	16 100 80 8x19 8x19	100 -	110/158	162/177 65 -	- 160 200	- 127 161 -	273 273	321/274 103/232	125 95 280 212 200 M12	100									
100-80-160	2.2	177	A	16 100 80 8x19 8x19	100 -	120/201	162/222 65 -	- 160 200	- 127 161 -	293 293	335/334 103/280	125 95 280 212 250 M12	100									
	11	147-127	B	16 125 80 8x19 8x19	125 254	204/237	243/420	- 210 108	- 225 160 139 182 15	368 368	471/406 213/317	- - - - 350 -	140									
	15	151	B	16 125 80 8x19 8x19	125 254	204/308	243/420	- 210 108	- 225 160 139 182 15	368 368	471/471 213/400	- - - - 350 -	140									
	2	18.5 161	B	16 125 80 8x19 8x19	125 254	204/308	243/420	- 254 108	- 225 160 139 182 15	368 368	515/515 213/400	- - - - 350 -	140									
	22	167	B	16 125 80 8x19 8x19	125 279	204/308	243/420	- 241 121	- 225 180 139 182 15	368 368	541/541 213/400	- - - - 350 -	140									
	30	177	B	16 125 80 8x19 8x19	125 318	315/-	265/-	- 305 133	- 225 200 139 182 19	368 368	611/- 197/-	- - - - 400 -	140									
	1.5	146	A	16 125 80 8x19 8x19	125 -	110/158	162/177 65 -	- 180 225	- 139 182 -	298 298	321/274 103/232	125 95 320 250 200 M12	140									
	4	2.2 161	A	16 125 80 8x19 8x19	125 -	120/201	162/222 65 -	- 180 225	- 139 182 -	318 318	335/334 103/280	125 95 320 250 250 M12	140									
	3	175	A	16 125 80 8x19 8x19	125 -	120/201	162/222 65 -	- 180 225	- 139 182 -	318 318	335/334 103/280	125 95 320 250 250 M12	140									
	4	177	A	16 125 80 8x19 8x19	125 -	134/201	202/208 65 -	- 180 225	- 139 182 -	318 318	372/334 103/280	125 95 320 250 250 M12	140									

Pump size Poles P2 [kW]	Actual impeller size	Mounting design	Flanges		NBG dimensions [mm]														LP CI	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾				
			PN	DNS DND	SS	SD	A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K							
125-80-200	22	171	C1	16	125	80	8x19	8x19	125 279	204/308	243/420	65	241	121	180	250	180	161	193	15	398	398	541/541	213/400	125 95 345 280 350 M12 140	
	30	188	C1	16	125	80	8x19	8x19	125 318	315/-	265/-	65	305	133	180	250	200	161	193	19	398	398	611/-	197/-	125 95 345 280 400 M12 140	
	2	37	200	C1	16	125	80	8x19	8x19	125 318	315/-	265/-	65	305	133	180	250	200	161	193	19	398	398	636/-	197/-	125 95 345 280 400 M12 140
	45	211	C1	16	125	80	8x19	8x19	125 356	338/-	266/-	65	286	149	180	250	225	161	193	19	428	428	708/-	197/-	125 95 345 280 450 M12 140	
	55	222	C1	16	125	80	8x19	8x19	125 406	410/-	319/-	65	349	168	180	250	250	161	193	24	428	428	747/-	233/-	125 95 345 280 550 M12 140	
	2.2	164	A	16	125	80	8x19	8x19	125 -	120/201	162/222	65 -	-	180	250	-	161	193 -	-	348	348	335/334	103/280	125 95 345 280 250 M12 140		
	3	179	A	16	125	80	8x19	8x19	125 -	120/201	162/222	65 -	-	180	250	-	161	193 -	-	348	348	335/334	103/280	125 95 345 280 250 M12 140		
	4	4	196	A	16	125	80	8x19	8x19	125 -	134/201	202/208	65 -	-	180	250	-	161	193 -	-	348	348	372/334	103/280	125 95 345 280 250 M12 140	
	5.5	214	A	16	125	80	8x19	8x19	125 -	159/237	203/227	65 -	-	180	250	-	161	193 -	-	368	368	379/389	135/317	125 95 345 280 300 M12 140		
	7.5	222	A	16	125	80	8x19	8x19	125 -	159/237	203/227	65 -	-	180	250	-	161	193 -	-	368	368	429/389	135/317	125 95 345 280 300 M12 140		
125-80-250	45	220	C1	16	125	80	8x19	8x19	125 356	338/-	266/-	80	286	149	225	280	225	182	210	19	428	428	708/-	197/-	160 120 400 315 450 M16 140	
	55	234	C1	16	125	80	8x19	8x19	125 406	410/-	319/-	80	349	168	225	280	250	182	210	24	428	428	747/-	233/-	160 120 400 315 550 M16 140	
	75	257	C1	16	125	80	8x19	8x19	125 457	433/-	319/-	80	368	190	225	280	280	182	210	24	428	428	820/-	233/-	160 120 400 315 550 M16 140	
	90	270	C1	16	125	80	8x19	8x19	125 457	433/-	319/-	80	368	190	225	280	280	182	210	24	428	428	930/-	233/-	160 120 400 315 550 M16 140	
	5.5	225	A	16	125	80	8x19	8x19	125 -	159/237	203/227	80 -	-	225	280	-	182	210 -	-	368	368	379/389	135/317	160 120 400 315 300 M16 140		
	4	7.5	247	A	16	125	80	8x19	8x19	125 -	159/237	203/227	80 -	-	225	280	-	182	210 -	-	368	368	429/389	135/317	160 120 400 315 300 M16 140	
	11	270	C1	16	125	80	8x19	8x19	125 254	204/308	243/420	80	210	108	225	280	160	182	210	15	398	398	545/471	213/400	160 120 400 315 350 M16 140	
	90	278	C1	16	125	80	8x19	8x19	125 457	433/-	319/-	80	368	190	250	315	280	217	243	24	426	426	930/-	233/-	160 120 400 315 550 M16 140	
	110	295	C1	16	125	80	8x19	8x19	125 508	515/-	374/-	80	406	216	250	315	315	217	243	28	456	456	912/-	299/-	160 120 400 315 660 M16 140	
	2	132	310	C1	16	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	250	315	315	217	243	28	456	456	1077/-	299/-	160 120 400 315 660 M16 140
125-80-315	160	328	C1	16	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	250	315	315	217	243	28	456	456	1077/-	299/-	160 120 400 315 660 M16 140	
	200	334	C1	25	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	250	315	315	217	243	28	460	460	1232/-	299/-	160 120 400 315 660 M16 140	
	11	280	C1	16	125	80	8x19	8x19	125 254	204/308	243/420	80	210	108	250	315	160	217	243	15	396	396	545/471	213/400	160 120 400 315 350 M16 140	
	4	15	305	C1	16	125	80	8x19	8x19	125 254	204/308	243/420	80	254	108	250	315	160	217	243	15	396	396	575/515	213/400	160 120 400 315 350 M16 140
	18.5	320	C1	16	125	80	8x19	8x19	125 279	286/-	189/-	80	241	121	250	315	180	217	243	15	396	396	558/-	164/-	160 120 400 315 350 M16 140	
	22	334	C1	16	125	80	8x19	8x19	125 279	286/-	189/-	80	241	121	250	315	180	217	243	15	396	396	588/-	164/-	160 120 400 315 350 M16 140	
	132	333	C1	25	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	280	355	315	266	288	28	456	456	1077/-	299/-	160 120 435 355 660 M16 140	
	2	160	349	C1	25	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	280	355	315	266	288	28	456	456	1077/-	299/-	160 120 435 355 660 M16 140
	200	388	C1	25	125	80	8x19	8x19	125 508	515/-	374/-	80	457	216	280	355	315	266	288	28	456	456	1232/-	299/-	160 120 435 355 660 M16 140	
125-80-400	18.5	347	C1	16	125	80	8x19	8x19	125 279	286/-	189/-	80	241	121	280	355	180	266	288	15	396	398	558/-	164/-	160 120 435 355 350 M16 140	
	22	365	C1	16	125	80	8x19	8x19	125 279	286/-	189/-	80	241	121	280	355	180	266	288	15	396	398	588/-	164/-	160 120 435 355 350 M16 140	
	4	30	397	C1	16	125	80	8x19	8x19	125 318	315/-	265/-	80	305	133	280	355	200	266	288	19	396	398	636/-	197/-	160 120 435 355 400 M16 140
	37	419	C1	16	125	80	8x19	8x19	125 356	338/-	266/-	80	286	149	280	355	225	266	288	19	426	428	648/-	197/-	160 120 435 355 450 M16 140	
	45	438	C1	16	125	80	8x19	8x19	125 356	338/-	266/-	80	286	149	280	355	225	266	288	19	426	428	708/-	197/-	160 120 435 355 450 M16 140	
	18.5	160-154	C1	16	125	100	8x19	8x19	125 254	204/308	243/420	80	254	108	200	280	160	146	187	15	368	368	515/515	213/400	160 120 360 280 350 M16 140	
	2	22	167	C1	16	125	100	8x19	8x19	125 279	204/308	243/420	80	241	121	200	280	180	146	187	15	368	368	541/541	213/400	160 120 360 280 350 M16 140
	30	176	C1	16	125	100	8x19	8x19	125 318	315/-	265/-	80	305	133	200	280	200	146	187	19	368	368	611/-	197/-	160 120 360 280 400 M16 140	
	2.2	160-140	A	16	125	100	8x19	8x19	125 -	120/201	162/222	80 -	-	200	280	-	146	187 -	-	318	318	335/334	103/280	160 120 360 280 250 M16 140		
	4	3	169	A	16	125	100	8x19	8x19	125 -	120/201	162/222	80 -	-	200	280	-	146	187 -	-	318	318	335/334	103/280	160 120 360 280 250 M16 140	
125-100-160	4	176	A	16	125	100	8x19	8x19	125 -	134/201	202/208	80 -	-	200	280	-	146	187 -	-	318	318	372/334	103/280	160 120 360 280 250 M16 140		
	0.55	160-140	A	16	125	100	8x19	8x19	125 -	120/-	75/-	80 -	-	200	280	-	146	187 -	-	298	298	234/-	75/-	160 120 360 280 200 M16 140		
	6	0.75	169	A	16	125	100	8x19	8x19	125 -	128/-	75/-	80 -													

Pump size	Poles	PZ [kW]	Actual impeller size	Mounting design	NBG dimensions [mm]															X ⁴⁰⁾												
					A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K	LP	CI	SS	LB ³⁸⁾	LL ³⁸⁾	M1	M2	N1	N2	P	S1 ³⁹⁾				
125-100-250	55	205	C116 125 100 8x19 8x19	140 406 410/- 319/- 80 349 168 225 280 250 200 232 24	441	441	747/-	233/-	160 120 400 315 550	M16	140																					
	75	229	C116 125 100 8x19 8x19	140 457 433/- 319/- 80 368 190 225 280 280 200 232 24	441	441	820/-	233/-	160 120 400 315 550	M16	140																					
	2	90	242	C116 125 100 8x19 8x19	140 457 433/- 319/- 80 368 190 225 280 280 200 232 24	441	441	930/-	233/-	160 120 400 315 550	M16	140																				
		110	258	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 406 216 225 280 315 200 232 28	471	471	912/-	299/-	160 120 400 315 660	M16	140																				
		132	274	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 457 216 225 280 315 200 232 28	471	471	1077/-	299/-	160 120 400 315 660	M16	140																				
		7.5	215	A16 125 100 8x19 8x19	140 - 159/237 203/227 80 - - 225 280 - 200 232 -	381	381	429/389 135/317		160 120 400 315 300	M16	140																				
		4	11	245	C116 125 100 8x19 8x19	140 254 204/308 243/420 80 210 108 225 280 160 200 232 15	411	411	545/471 213/400		160 120 400 315 350	M16	140																			
		15	274	C116 125 100 8x19 8x19	140 254 204/308 243/420 80 254 108 225 280 160 200 232 15	411	411	575/515 213/400		160 120 400 315 350	M16	140																				
		2.2	216	A16 125 100 8x19 8x19	140 - 177/- 135/- 80 - - 225 280 - 200 232 -	363	363	354/-	112/-	160 120 400 315 250	M16	140																				
		6	3	236	A16 125 100 8x19 8x19	140 - 202/- 155/- 80 - - 225 280 - 200 232 -	381	381	385/-	130/-	160 120 400 315 300	M16	140																			
		4	260	A16 125 100 8x19 8x19	140 - 202/- 155/- 80 - - 225 280 - 200 232 -	381	381	385/-	130/-	160 120 400 315 300	M16	140																				
		5.5	274	A16 125 100 8x19 8x19	140 - 202/- 155/- 80 - - 225 280 - 200 232 -	381	381	435/-	130/-	160 120 400 315 300	M16	140																				
		110	269	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 406 216 250 315 315 208 264 28	471	471	912/-	299/-	160 120 400 315 660	M16	140																				
		2	132	284	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 457 216 250 315 315 208 264 28	471	471	1077/-	299/-	160 120 400 315 660	M16	140																			
		160	301	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 457 216 250 315 315 208 264 28	471	471	1077/-	299/-	160 120 400 315 660	M16	140																				
		200	322	C116 125 100 8x19 8x19	140 508 515/- 374/- 80 457 216 250 315 315 208 264 28	471	471	1232/-	299/-	160 120 400 315 660	M16	140																				
		15	279	C116 125 100 8x19 8x19	140 254 204/308 243/420 80 254 108 250 315 160 208 264 15	411	411	575/515 213/400		160 120 400 315 350	M16	140																				
		4	18.5	295	C116 125 100 8x19 8x19	140 279 286/- 189/- 80 241 121 250 315 180 208 264 15	411	411	558/-	164/-	160 120 400 315 350	M16	140																			
		22	312	C116 125 100 8x19 8x19	140 279 286/- 189/- 80 241 121 250 315 180 208 264 15	411	411	588/-	164/-	160 120 400 315 350	M16	140																				
		30	334	C116 125 100 8x19 8x19	140 318 315/- 265/- 80 305 133 250 315 200 208 264 19	411	411	636/-	197/-	160 120 400 315 400	M16	140																				
		4	272	A16 125 100 8x19 8x19	140 - 202/- 155/- 80 - - 250 315 - 208 264 -	381	381	385/-	130/-	160 120 400 315 300	M16	140																				
		6	301	A16 125 100 8x19 8x19	140 - 202/- 155/- 80 - - 250 315 - 208 264 -	381	381	435/-	130/-	160 120 400 315 300	M16	140																				
		7.5	326	C116 125 100 8x19 8x19	140 254 237/- 175/- 80 210 108 250 315 160 208 264 15	411	411	494/-	145/-	160 120 400 315 350	M16	140																				
		11	334	C116 125 100 8x19 8x19	140 254 237/- 175/- 80 254 108 250 315 160 208 264 15	411	411	554/-	145/-	160 120 400 315 350	M16	140																				
		22	334	C116 125 100 8x19 8x19	140 279 286/- 189/- 100 241 121 280 355 180 270 296 15	411	411	588/-	164/-	200 150 500 400 350	M20	140																				
		30	360	C116 125 100 8x19 8x19	140 318 315/- 265/- 100 305 133 280 355 200 270 296 19	411	411	636/-	197/-	200 150 500 400 400	M20	140																				
		4	37	375	C116 125 100 8x19 8x19	140 356 338/- 266/- 100 286 149 280 355 225 270 296 19	441	441	648/-	197/-	200 150 500 400 450	M20	140																			
		45	395	C116 125 100 8x19 8x19	140 356 338/- 266/- 100 286 149 280 355 225 270 296 19	441	441	708/-	197/-	200 150 500 400 450	M20	140																				
		55	415	C116 125 100 8x19 8x19	140 406 410/- 319/- 100 349 168 280 355 250 270 296 24	441	441	747/-	233/-	200 150 500 400 550	M20	140																				
		7.5	340	C116 125 100 8x19 8x19	140 254 237/- 175/- 100 210 108 280 355 160 270 296 15	411	411	494/-	145/-	200 150 500 400 350	M20	140																				
		6	11	380	C116 125 100 8x19 8x19	140 254 237/- 175/- 100 254 121 280 355 160 270 296 15	411	411	554/-	145/-	200 150 500 400 350	M20	140																			
		15	415	C116 125 100 8x19 8x19	140 279 286/- 189/- 100 241 121 280 355 180 270 296 15	411	411	588/-	164/-	200 150 500 400 350	M20	140																				
		45	176-154	C116 150 125 8x23 8x19	140 149 325/- 260/- 80 311 356 250 315 225 200 252 19	443	443	709/-	192/-	160 120 400 315 450	M16	140																				
		55	196-166	C116 150 125 8x23 8x19	140 168 392/- 300/- 80 349 406 250 315 250 200 252 24	443	443	747/-	236/-	160 120 400 315 550	M16	140																				
		2	75	205	C116 150 125 8x23 8x19	140 190 432/- 300/- 80 368 457 250 315 280 200 252 24	443	443	820/-	236/-	160 120 400 315 550	M16	140																			
		90	219	C116 150 125 8x23 8x19	140 190 432/- 300/- 80 419 457 250 315 280 200 252 24	443	443	930/-	236/-	160 120 400 315 550	M16	140																				
		110	224	C116 150 125 8x23 8x19	140 216 495/- 379/- 80 406 508 250 315 315 200 252 28	473	473	932/-	307/-	160 120 400 315 660	M16	140																				
		5.5	176-154	A16 150 125 8x23 8x19	140 - 159/237 203/227 80 - - 250 315 - 200 252 -	383	383	379/389 135/317		160 120 400 315 300	M16	140																				
		7.5	196-180	A16 150 125 8x23 8x19	140 - 159/237 203/227 80 - - 250 315 - 200 252 -	383	383	429/389 135/317		160 120 400 315 300	M16	140																				
		11	219	C116 150 125 8x23 8x19	140 254 204/308 243/420 80 254 108 250 315 160 200 252 15	413	413	545/471 213/400		160 120 400 315 350	M16	140																				
		15	226	C116 150 125 8x23 8x19	140 254 204/308 243/420 80 254 108																											

Pump size Poles	Actual impeller size P2 [kW]	Mounting design	Flanges				NBG dimensions [mm]												LP		LB ³⁸⁾	LL ³⁸⁾	M1	M2	N1	N2	P	S1 ³⁹⁾	X ⁴⁰⁾									
			PN	DNS	DND	SS	SD	A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K	LP																	
																				CI	SS																	
150-125-250	90	221	C1	16	150	125	8x23	8x19	140	190	432/-	300/-	80	419	457	250	355	280	208	264	24	441	441	930/-	236/-	160	120	400	315	550	M16	140						
	110	235	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	80	406	508	250	355	315	208	264	28	471	471	932/-	307/-	160	120	400	315	660	M16	140						
	132	248	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	80	457	508	250	355	315	208	264	28	471	471	1092/-	307/-	160	120	400	315	660	M16	140						
	160	261	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	80	508	508	250	355	315	208	264	28	471	471	1092/-	307/-	160	120	400	315	660	M16	140						
	200	269	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	80	508	508	250	355	315	208	264	28	471	471	1232/-	307/-	160	120	400	315	660	M16	140						
	11	220	C1	16	150	125	8x23	8x19	140	254	204/308	243/420	80	210	108	250	355	160	208	264	15	411	411	545/471	213/400	160	120	400	315	350	M16	140						
	15	236	C1	16	150	125	8x23	8x19	140	254	204/308	243/420	80	254	108	250	355	160	208	264	15	411	411	575/515	213/400	160	120	400	315	350	M16	140						
	18.5	249	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	80	241	121	250	355	180	208	264	15	411	411	558/-	164/-	160	120	400	315	350	M16	140						
	22	262	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	80	241	121	250	355	180	208	264	15	411	411	588/-	164/-	160	120	400	315	350	M16	140						
	30	269	C1	16	150	125	8x23	8x19	140	318	315/-	265/-	80	305	133	250	355	200	208	264	19	411	411	636/-	197/-	160	120	400	315	400	M16	140						
150-125-315	3	216	A	16	150	125	8x23	8x19	140	-	202/-	155/-	80	-	-	250	355	-	208	264	-	381	381	385/-	130/-	160	120	400	315	300	M16	140						
	4	232	A	16	150	125	8x23	8x19	140	-	202/-	155/-	80	-	-	250	355	-	208	264	-	381	381	385/-	130/-	160	120	400	315	300	M16	140						
	5.5	253	A	16	150	125	8x23	8x19	140	-	202/-	155/-	80	-	-	250	355	-	208	264	-	381	381	435/-	130/-	160	120	400	315	300	M16	140						
	7.5	269	C1	16	150	125	8x23	8x19	140	254	237/-	175/-	80	210	108	250	355	160	208	264	15	411	411	494/-	145/-	160	120	400	315	350	M16	140						
	132	262	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	100	457	508	280	355	315	231	268	28	471	471	1092/-	307/-	200	150	500	400	660	M20	140						
	160	277	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	100	508	508	280	355	315	231	268	28	471	471	1092/-	307/-	200	150	500	400	660	M20	140						
	200	297	C1	16	150	125	8x23	8x19	140	216	495/-	379/-	100	508	508	280	355	315	231	268	28	471	471	1232/-	307/-	200	150	500	400	660	M20	140						
	18.5	275	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	100	241	121	280	355	180	231	268	15	411	411	558/-	164/-	200	150	500	400	350	M20	140						
	22	290	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	100	241	121	280	355	180	231	268	15	411	411	588/-	164/-	200	150	500	400	350	M20	140						
	30	317	C1	16	150	125	8x23	8x19	140	318	315/-	265/-	100	305	133	280	355	200	231	268	19	411	411	636/-	197/-	200	150	500	400	400	M20	140						
150-125-400	37	336	C1	16	150	125	8x23	8x19	140	356	338/-	266/-	100	286	149	280	355	225	231	268	19	441	441	648/-	197/-	200	150	500	400	450	M20	140						
	45	338	C1	16	150	125	8x23	8x19	140	356	338/-	266/-	100	286	149	280	355	225	231	268	19	441	441	708/-	197/-	200	150	500	400	450	M20	140						
	5.5	275	A	16	150	125	8x23	8x19	140	-	202/-	155/-	100	-	-	280	355	-	231	268	-	381	381	435/-	130/-	200	150	500	400	300	M20	140						
	7.5	297	C1	16	150	125	8x23	8x19	140	254	237/-	175/-	100	210	108	280	355	160	231	268	15	411	411	494/-	145/-	200	150	500	400	350	M20	140						
	11	335	C1	16	150	125	8x23	8x19	140	254	237/-	175/-	100	254	108	280	355	160	231	268	15	411	411	554/-	145/-	200	150	500	400	350	M20	140						
	15	338	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	100	241	121	280	355	180	231	268	15	411	411	588/-	164/-	200	150	500	400	350	M20	140						
	37	345	C1	16	150	125	8x23	8x19	140	356	338/-	266/-	100	286	149	315	400	225	284	320	19	441	441	648/-	197/-	200	150	500	400	450	M20	140						
	45	368	C1	16	150	125	8x23	8x19	140	356	338/-	266/-	100	286	149	315	400	225	284	320	19	441	441	708/-	197/-	200	150	500	400	450	M20	140						
	55	392	C1	16	150	125	8x23	8x19	140	406	410/-	319/-	100	349	168	315	400	250	284	320	24	441	441	747/-	233/-	200	150	500	400	550	M20	140						
150-125-500	75	433	C1	16	150	125	8x23	8x19	140	457	433/-	319/-	100	368	190	315	400	280	284	320	24	441	441	820/-	233/-	200	150	500	400	550	M20	140						
	90	438	C1	16	150	125	8x23	8x19	140	457	433/-	319/-	100	368	190	315	400	280	284	320	24	441	441	930/-	233/-	200	150	500	400	550	M20	140						
	11	351	C1	16	150	125	8x23	8x19	140	254	237/-	175/-	100	254	108	315	400	160	284	320	15	411	411	554/-	145/-	200	150	500	400	350	M20	140						
	15	384	C1	16	150	125	8x23	8x19	140	279	286/-	189/-	100	241	121	315	400	180	284	320	15	411	411	588/-	164/-	200	150	500	400	350	M20	140						
	18.5	410	C1	16	150	125	8x23	8x19	140	318	315/-	265/-	100	305	133	315	400	200	284	320	19	411	411	611/-	197/-	200	150	500	400	400	M20	140						
	22	434	C1	16	150	125	8x23	8x19	140	318	315/-	265/-	100	305	133	315	400	200	284	320	19	411	411	636/-	197/-	200	150	500	400	400	M20	140						
	30	438	C1	16	150	125	8x23	8x19	140	356	338/-	266/-	100	286	149	315	400	225	284	320	19	441	441	708/-	197/-	200	150	500	400	450	M20	140						
	55	406	C1	16	150	125	8x23	8x19	180	406	410/-	319/-	125	349	168	400	500	250	344	377	24	524	524	747/-	233/-	200	150	625	500	550	M20	180						
	75	447	C1	16	150	125	8x23	8x19	180	457	433/-	319/-	125	368	190	400	500	280	344	377	24	524	524	820/-	233/-	200	150	625	500	550	M20	180						
	90	473	C1	16	150	125	8x23	8x19	180	457	433/-	319/-	125	368	190	400	500	280	344	377	24	524	524	930/-	233/-	200	150	625	500	550	M20	180						
150-125-500	110	500	C1	16	150	125	8x23	8x19	180																													

Pump size Poles P2 [kW]	Actual impeller size Mounting design PN	Flanges		NBG dimensions [mm]															LP CI	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾
		A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K	CI	SS						
200-150-200	75 216-176	C1	16 200 150 12x23	8x23	160 457	433/-	319/-	100 368 190 280 400 280 230 319	24	463	463	820/-	233/-	200 150 550 450	550	M20	180					
	2 90 218-202	C1	16 200 150 12x23	8x23	160 457	433/-	319/-	100 368 190 280 400 280 230 319	24	463	463	930/-	233/-	200 150 550 450	550	M20	180					
	110 224	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 406 216 280 400 315 230 319	28	493	493	912/-	299/-	200 150 550 450	660	M20	180					
	7.5 210-158	A	16 200 150 12x23	8x23	160 -	159/237	203/227	100 -	-	280	400	-	230 319	-	403	403	429/389 135/317	200 150 550 450	300	M20	180	
	4 11 218-208	C1	16 200 150 12x23	8x23	160 254	204/308	243/420	100 210 108 280 400 160 230 319	15	433	433	545/471 213/400	200 150 550 450	350	M20	180						
	15 224	C1	16 200 150 12x23	8x23	160 254	204/308	243/420	100 254 108 280 400 160 230 319	15	433	433	575/515 213/400	200 150 550 450	350	M20	180						
	2.2 210-168	A	16 200 150 12x23	8x23	160 -	177/-	135/-	100 -	-	280	400	-	230 319	-	383	383	354/-	112/-	200 150 550 450	250	M20	180
	6 3 218-200	A	16 200 150 12x23	8x23	160 -	202/-	155/-	100 -	-	280	400	-	230 319	-	403	403	385/-	130/-	200 150 550 450	300	M20	180
	4 224	A	16 200 150 12x23	8x23	160 -	202/-	155/-	100 -	-	280	400	-	230 319	-	403	403	385/-	130/-	200 150 550 450	300	M20	180
	132 226-220	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 457 216 280 375 315 221 287	28	491	491	1077/-	299/-	200 150 500 400	660	M20	180					
200-150-250	2 160 235	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 457 216 280 375 315 221 287	28	491	491	1077/-	299/-	200 150 500 400	660	M20	180					
	200 250	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 457 216 280 375 315 221 287	28	491	491	1232/-	299/-	200 150 500 400	660	M20	180					
	15 226-214	C1	16 200 150 12x23	8x23	160 254	204/308	243/420	100 254 108 280 375 160 250 297	15	431	431	575/515 213/400	200 150 500 400	350	M20	180						
	18.5 230	C1	16 200 150 12x23	8x23	160 279	286/-	189/-	100 241 121 280 375 180 250 297	15	431	431	558/-	164/-	200 150 500 400	350	M20	180					
	22 242	C1	16 200 150 12x23	8x23	160 279	286/-	189/-	100 241 121 280 375 180 250 297	15	431	431	588/-	164/-	200 150 500 400	350	M20	180					
	4 30 262	C1	16 200 150 12x23	8x23	160 318	315/-	265/-	100 305 133 280 375 200 250 297	19	431	431	636/-	197/-	200 150 500 400	400	M20	180					
	37 275	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 280 375 225 250 297	19	461	461	648/-	197/-	200 150 500 400	450	M20	180					
	45 282	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 280 375 225 250 297	19	461	461	708/-	197/-	200 150 500 400	450	M20	180					
	5.5 235	A	16 200 150 12x23	8x23	160 -	202/-	155/-	100 -	-	280	375	-	250 297	-	401	401	435/-	130/-	200 150 500 400	300	M20	180
	6 7.5 252	C1	16 200 150 12x23	8x23	160 254	237/-	175/-	100 210 108 280 375 160 250 297	15	431	431	494/-	145/-	200 150 500 400	350	M20	180					
200-150-315	11 282	C1	16 200 150 12x23	8x23	160 254	237/-	175/-	100 254 108 280 375 160 250 297	15	431	431	554/-	145/-	200 150 500 400	350	M20	180					
	37 275	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 315 400 225 264 331	19	474	474	648/-	197/-	200 150 550 450	450	M20	180					
	45 291	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 315 400 225 264 331	19	474	474	708/-	197/-	200 150 550 450	450	M20	180					
	4 55 310	C1	16 200 150 12x23	8x23	160 406	410/-	319/-	100 349 168 315 400 250 264 331	24	474	474	747/-	233/-	200 150 550 450	550	M20	180					
	75 336	C1	16 200 150 12x23	8x23	160 457	433/-	319/-	100 368 190 315 400 280 264 331	24	474	474	820/-	233/-	200 150 550 450	550	M20	180					
	90 338	C1	16 200 150 12x23	8x23	160 457	433/-	319/-	100 368 190 315 400 280 264 331	24	474	474	930/-	233/-	200 150 550 450	550	M20	180					
	11 280	C1	16 200 150 12x23	8x23	160 254	237/-	175/-	100 254 108 315 400 160 264 331	15	444	444	554/-	145/-	200 150 550 450	350	M20	180					
	15 305	C1	16 200 150 12x23	8x23	160 279	286/-	189/-	100 241 121 315 400 180 264 331	15	444	444	588/-	164/-	200 150 550 450	350	M20	180					
	6 18.5 322	C1	16 200 150 12x23	8x23	160 318	315/-	265/-	100 305 133 315 400 200 264 331	19	444	444	611/-	197/-	200 150 550 450	400	M20	180					
	22 337	C1	16 200 150 12x23	8x23	160 318	315/-	265/-	100 305 133 315 400 200 264 331	19	444	444	636/-	197/-	200 150 550 450	400	M20	180					
200-150-315.2	30 338	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 315 400 225 264 331	19	474	474	708/-	197/-	200 150 550 450	450	M20	180					
	160 244	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 457 216 315 400 315 264 331	28	504	504	1077/-	299/-	200 150 550 450	660	M20	180					
	2 200 262	C1	16 200 150 12x23	8x23	160 508	515/-	374/-	100 457 216 315 400 315 264 331	28	504	504	1232/-	299/-	200 150 550 450	660	M20	180					
	22 250	C1	16 200 150 12x23	8x23	160 279	286/-	189/-	100 241 121 315 400 180 264 331	15	444	444	588/-	164/-	200 150 550 450	350	M20	180					
	30 275	C1	16 200 150 12x23	8x23	160 318	315/-	265/-	100 305 133 315 400 200 264 331	19	444	444	636/-	197/-	200 150 550 450	400	M20	180					
	37 294	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 315 400 225 264 331	19	474	474	648/-	197/-	200 150 550 450	450	M20	180					
	45 314	C1	16 200 150 12x23	8x23	160 356	338/-	266/-	100 286 149 315 400 225 264 331	19	474	474	708/-	197/-	200 150 550 450	450	M20	180					
	55 334	C1	16 200 150 12x23	8x23	160 406	410/-	319/-	100 349 168 315 400 250 264 331	24	474	474	747/-	233/-	200 150 550 450	550	M20	180					
	75 342	C1	16 200 150 12x23	8x23	160 457	433/-	319/-	100 368 190 315 400 280 264 331	24	474	474	820/-	233/-	200 150 550 450	550	M20	180					
	7.5 259	C1	16 200 150 12x23	8x23	160 254	237/-	175/-	100 210 108 315 400 160 264 331	15	444	444	494/-	145/-	200 150 550 450	350	M20	180					
200-150-400	11 293	C1	16 200 150 12x23	8x23	160 254	237/-	175/-	100 254 108 315 400 160 264 331	15	444	444	554/-	145/-	200 150 550 450	350	M20	180					
	15 328	C1	16 200 150 12x23	8x23	160 279	286/-	189/-	100 241 121 315 400 180 264 331	15	444	444	588/-	164/-	200 150 550 450	350	M20	180					
	18.5 342	C1	16 200 150 12x23	8x23	160 318	315/-	265/-	100 305 133 315 400 200 264 331	19	444	444	611/-	197/-	200 150 550 450	400	M20	180					
	55 343	C1	16 200 150 12x23	8x23	160 406	410/-	319/-	100 349 168 315 450 250 291 339	24	474	474	747/-	233/-	200 150 550 450	550	M20	180					
	75 375	C1	16 200 150 12x23	8x23</td																		

Pump size Poles P2 [kW]	Actual impeller size	Mounting design PN	Flanges		NBG dimensions [mm]														LP CI	LB ³⁸⁾ LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾					
			DNS	DND	SS	SD	A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K								
200-150-500	132	459	C1	16	200	150	12x23	8x23	180	508	515/-	374/-	125	457	216	400	500	315	353	396	28	554	554	1077/-	299/-	200 150 625 500 660 M20 180	
	4	160	489	C1	16	200	150	12x23	8x23	180	508	515/-	374/-	125	457	216	400	500	315	353	396	28	554	554	1077/-	299/-	200 150 625 500 660 M20 180
	200	521	C1	16	200	150	12x23	8x23	180	508	515/-	374/-	125	457	216	400	500	315	353	396	28	554	554	1232/-	299/-	200 150 625 500 660 M20 180	
	37	457	C1	16	200	150	12x23	8x23	180	406	410/-	319/-	125	349	168	400	500	250	353	396	24	524	524	747/-	233/-	200 150 625 500 550 M20 180	
	6	45	C1	16	200	150	12x23	8x23	180	457	433/-	319/-	125	368	190	400	500	280	353	396	24	524	524	820/-	233/-	200 150 625 500 550 M20 180	
	55	513	C1	16	200	150	12x23	8x23	180	457	433/-	319/-	125	368	190	400	500	280	353	396	24	524	524	820/-	233/-	200 150 625 500 550 M20 180	
	75	548	C1	16	200	150	12x23	8x23	180	508	515/-	374/-	125	406	216	400	500	315	353	396	28	554	554	912/-	299/-	200 150 625 500 660 M20 180	
	37	280	C2	16	250	200	12x28	12x23	170	356	338/-	266/-	125	286	149	400	400	225	331	485	19	512	-	648/-	197/-	200 150 625 500 450 M20 180	
	45	296	C2	16	250	200	12x28	12x23	170	356	338/-	266/-	125	286	149	400	400	225	331	485	19	512	-	708/-	197/-	200 150 625 500 450 M20 180	
	55	312	C2	16	250	200	12x28	12x23	170	406	410/-	319/-	125	349	168	400	400	250	331	485	24	512	-	747/-	233/-	200 150 625 500 550 M20 180	
250-200-400	4	75	344	C2	16	250	200	12x28	12x23	170	457	433/-	319/-	125	368	190	400	400	280	331	485	24	512	-	820/-	233/-	200 150 625 500 550 M20 180
	90	364	C2	16	250	200	12x28	12x23	170	457	433/-	319/-	125	368	190	400	400	280	331	485	24	512	-	930/-	233/-	200 150 625 500 550 M20 180	
	110	392	C2	16	250	200	12x28	12x23	170	508	515/-	374/-	125	406	216	400	400	315	331	485	28	542	-	912/-	299/-	200 150 625 500 660 M20 180	
	132	404	C2	16	250	200	12x28	12x23	170	508	515/-	374/-	125	457	216	400	400	315	331	485	28	542	-	1077/-	299/-	200 150 625 500 660 M20 180	
	15	308	C2	16	250	200	12x28	12x23	170	279	286/-	189/-	125	241	121	400	400	180	331	485	15	482	-	588/-	164/-	200 150 625 500 350 M20 180	
	18.5	328	C2	16	250	200	12x28	12x23	170	318	315/-	265/-	125	305	133	400	400	200	331	485	19	482	-	611/-	197/-	200 150 625 500 400 M20 180	
	6	22	348	C2	16	250	200	12x28	12x23	170	318	315/-	265/-	125	305	133	400	400	200	331	485	19	482	-	636/-	197/-	200 150 625 500 400 M20 180
	30	384	C2	16	250	200	12x28	12x23	170	356	338/-	266/-	125	286	149	400	400	225	331	485	19	512	-	708/-	197/-	200 150 625 500 450 M20 180	
	37	404	C2	16	250	200	12x28	12x23	170	406	410/-	319/-	125	349	168	400	400	250	331	485	24	512	-	747/-	233/-	200 150 625 500 550 M20 180	
	75	367	C2	16	250	200	12x28	12x23	150	457	433/-	319/-	125	368	190	400	450	280	355	525	24	487	-	820/-	233/-	200 150 625 500 550 M20 180	
250-200-450	90	391	C2	16	250	200	12x28	12x23	150	457	433/-	319/-	125	368	190	400	450	280	355	525	24	487	-	930/-	233/-	200 150 625 500 550 M20 180	
	4	110	415	C2	16	250	200	12x28	12x23	150	508	515/-	374/-	125	406	216	400	450	315	355	525	28	517	-	912/-	299/-	200 150 625 500 660 M20 180
	132	435	C2	16	250	200	12x28	12x23	150	508	515/-	374/-	125	457	216	400	450	315	355	525	28	517	-	1077/-	299/-	200 150 625 500 660 M20 180	
	160	455	C2	16	250	200	12x28	12x23	150	508	515/-	374/-	125	457	216	400	450	315	355	525	28	517	-	1077/-	299/-	200 150 625 500 660 M20 180	
	18.5	355	C2	16	250	200	12x28	12x23	150	318	315/-	265/-	125	305	133	400	450	200	355	525	19	457	-	611/-	197/-	200 150 625 500 400 M20 180	
	22	371	C2	16	250	200	12x28	12x23	150	318	315/-	265/-	125	305	133	400	450	200	355	525	19	457	-	636/-	197/-	200 150 625 500 400 M20 180	
	6	30	407	C2	16	250	200	12x28	12x23	150	356	338/-	266/-	125	286	149	400	450	225	355	525	19	487	-	708/-	197/-	200 150 625 500 450 M20 180
	37	431	C2	16	250	200	12x28	12x23	150	406	410/-	319/-	125	349	168	400	450	250	355	525	24	487	-	747/-	233/-	200 150 625 500 550 M20 180	
	45	451	C2	16	250	200	12x28	12x23	150	457	433/-	319/-	125	368	190	400	450	280	355	525	24	487	-	820/-	233/-	200 150 625 500 550 M20 180	
	37	266	C2	16	300	250	12x28	12x28	180	356	338/-	266/-	125	286	149	450	400	225	379	523	19	566	-	648/-	197/-	200 150 625 500 450 M20 ⁴¹⁾ 180	
300-250-350	45	294	C2	16	300	250	12x28	12x28	180	356	338/-	266/-	125	286	149	450	400	225	379	523	19	566	-	708/-	197/-	200 150 625 500 450 M20 ⁴¹⁾ 180	
	4	55	318	C2	16	300	250	12x28	12x28	180	406	410/-	319/-	125	349	168	450	400	250	379	523	24	566	-	747/-	233/-	200 150 625 500 550 M20 ⁴¹⁾ 180
	75	362	C2	16	300	250	12x28	12x28	180	457	433/-	319/-	125	368	190	450	400	280	379	523	24	566	-	820/-	233/-	200 150 625 500 550 M20 ⁴¹⁾ 180	
	90	370	C2	16	300	250	12x28	12x28	180	457	433/-	319/-	125	368	190	450	400	280	379	523	24	566	-	930/-	233/-	200 150 625 500 550 M20 ⁴¹⁾ 180	
	11	277	C2	16	300	250	12x28	12x28	180	254	237/-	175/-	125	254	108	450	400	160	379	523	15	536	-	554/-	145/-	200 150 625 500 350 M20 ⁴¹⁾ 180	
	15	306	C2	16	300	250	12x28	12x28	180	279	286/-	189/-	125	241	121	450	400	180	379	523	15	536	-	588/-	164/-	200 150 625 500 350 M20 ⁴¹⁾ 180	
	6	18.5	330	C2	16	300	250	12x28	12x28	180	318	315/-	265/-	125	305	133	450	400	200	379	523	19	536	-	611/-	197/-	200 150 625 500 400 M20 ⁴¹⁾ 180
	22	366	C2	16	300	250	12x28	12x28	180	318	315/-	265/-	125	305	133	450	400	200	379	523	19	536	-	636/-	197/-	200 150 625 500 400 M20 ⁴¹⁾ 180	
	45	281	C2	16	300	250	12x28	12x28	160	356	338/-	266/-	125	286	149	450	500	225	350	498	19	518	-	708/-	197/-	200 150 625 500 450 M20 ⁴¹⁾ 180	
300-250-400	55	301	C2	16	300	250	12x28	12x28	160	406	410/-	319/-	125	349	168	450	500	250	350	498	24	518	-	747/-	233/-	200 150 625 500 550 M20 ⁴¹⁾ 180	
	75	329	C2	16	300	250	12x28	12x28	160	457	433/-																

Pump size Poles	Actual impeller size P2 [kW]	Mounting design PN	Flanges		NBG dimensions [mm]													LP CI	LB ³⁸⁾ SS	LL ³⁸⁾	M1 M2 N1 N2 P S1 ³⁹⁾	X ⁴⁰⁾
			A	A*	AD ³⁸⁾	AG ³⁸⁾	B1	B	C	H1	H2	H	G1	G2	K							
300-250-450	75	325	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 374 563	24	521	-	820/-	233/-	200 150 625 500 550	M20	180						
	90	341	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 374 563	24	521	-	930/-	233/-	200 150 625 500 550	M20	180						
	110	361	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 406 216 450 500 315 374 563	28	551	-	912/-	299/-	200 150 625 500 660	M20	180						
	132	381	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 374 563	28	551	-	1077/-	299/-	200 150 625 500 660	M20	180						
	160	401	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 374 563	28	551	-	1077/-	299/-	200 150 625 500 660	M20	180						
	200	445	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 374 563	28	551	-	1232/-	299/-	200 150 625 500 660	M20	180						
	18.5	313	C2	16 300 250 12x28 12x28	165 318	315/-	265/-	125 305 133 450 500 200 374 563	19	491	-	611/-	197/-	200 150 625 500 400	M20	180						
	22	325	C2	16 300 250 12x28 12x28	165 318	315/-	265/-	125 305 133 450 500 200 374 563	19	491	-	636/-	197/-	200 150 625 500 400	M20	180						
	30	357	C2	16 300 250 12x28 12x28	165 356	338/-	266/-	125 286 149 450 500 225 374 563	19	521	-	708/-	197/-	200 150 625 500 450	M20	180						
	37	377	C2	16 300 250 12x28 12x28	165 406	410/-	319/-	125 349 168 450 500 250 374 563	24	521	-	747/-	233/-	200 150 625 500 550	M20	180						
300-250-500	45	397	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 374 563	24	521	-	820/-	233/-	200 150 625 500 550	M20	180						
	55	433	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 374 563	24	521	-	820/-	233/-	200 150 625 500 550	M20	180						
	160	417	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 441 598	28	574	-	1077/-	299/-	200 150 725 600 660	M20 ⁴¹⁾	180						
	200	445	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 441 598	28	574	-	1232/-	299/-	200 150 725 600 660	M20 ⁴¹⁾	180						
	45	409	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 441 598	24	549	-	820/-	233/-	200 150 725 600 550	M20 ⁴¹⁾	180						
	55	437	C2	16 300 250 12x28 12x28	165 457	433/-	319/-	125 368 190 450 500 280 441 598	24	549	-	820/-	233/-	200 150 725 600 550	M20 ⁴¹⁾	180						
	75	485	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 406 216 450 500 315 441 598	28	574	-	912/-	299/-	200 150 725 600 660	M20 ⁴¹⁾	180						
	90	525	C2	16 300 250 12x28 12x28	165 508	515/-	374/-	125 457 216 450 500 315 441 598	28	574	-	1077/-	299/-	200 150 725 600 660	M20 ⁴¹⁾	180						
	75	328-212	C2	16 350 300 16x28 12x28	280 457	433/-	319/-	140 368 190 480 400 280 416 560	24	623	-	820/-	233/-	215 180 640 500 550	M24	280						
	90	340-240	C2	16 350 300 16x28 12x28	280 457	433/-	319/-	140 368 190 480 400 280 416 560	24	623	-	930/-	233/-	215 180 640 500 550	M24	280						
410-350-294	4	110	C2	16 350 300 16x28 12x28	280 508	515/-	374/-	140 406 216 480 400 315 416 560	28	653	-	912/-	299/-	215 180 640 500 660	M24	280						
	132	346	C2	16 350 300 16x28 12x28	280 508	515/-	374/-	140 457 216 480 400 315 416 560	28	653	-	1077/-	299/-	215 180 640 500 660	M24	280						
	160	350	C2	16 350 300 16x28 12x28	280 508	515/-	374/-	140 457 216 480 400 315 416 560	28	653	-	1077/-	299/-	215 180 640 500 660	M24	280						
	18.5	310-194	C2	16 350 300 16x28 12x28	280 318	315/-	265/-	140 305 133 480 400 200 416 560	19	593	-	611/-	197/-	215 180 640 500 400	M24	280						
	22	328-212	C2	16 350 300 16x28 12x28	280 318	315/-	265/-	140 305 133 480 400 200 416 560	19	593	-	636/-	197/-	215 180 640 500 400	M24	280						
	6	30	C2	16 350 300 16x28 12x28	280 356	338/-	266/-	140 286 149 480 400 225 416 560	19	623	-	708/-	197/-	215 180 640 500 450	M24	280						
	37	342	C2	16 350 300 16x28 12x28	280 406	410/-	319/-	140 349 168 480 400 250 416 560	24	623	-	747/-	233/-	215 180 640 500 550	M24	280						
	45	350	C2	16 350 300 16x28 12x28	280 457	433/-	319/-	140 368 190 480 400 280 416 560	24	623	-	820/-	233/-	215 180 640 500 550	M24	280						
	11	336-236	C2	16 350 300 16x28 12x28	280 279	286/-	190/-	140 241 121 480 400 180 416 560	15	593	-	588/-	165/-	215 180 640 500 350	M24	280						
	8	15	C2	16 350 300 16x28 12x28	280 318	315/-	266/-	140 305 133 480 400 200 416 560	19	593	-	636/-	197/-	215 180 640 500 400	M24	280						
	18.5	350	C2	16 350 300 16x28 12x28	280 356	338/-	266/-	140 286 149 480 400 225 416 560	19	623	-	648/-	197/-	215 180 640 500 450	M24	280						

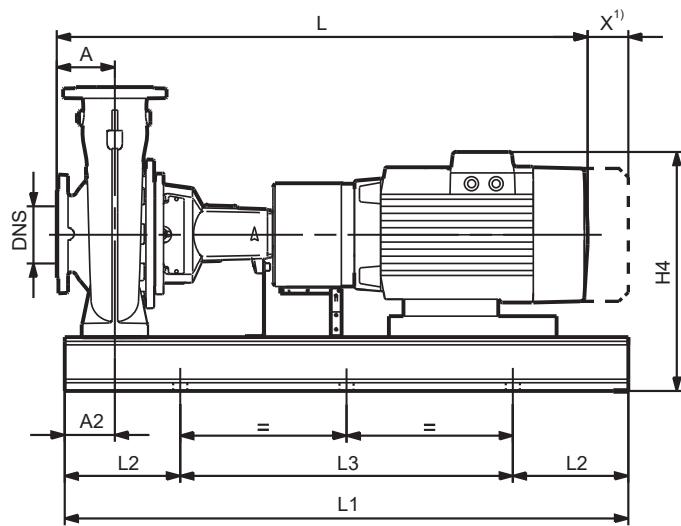
Note: NBG 350-300-305 is available with PN 10 pump flanges, the PN 10 flange dimensions of Ss is 16x23, Sd is 12x23.

38) Pump with standard motor / pump with E-motor.

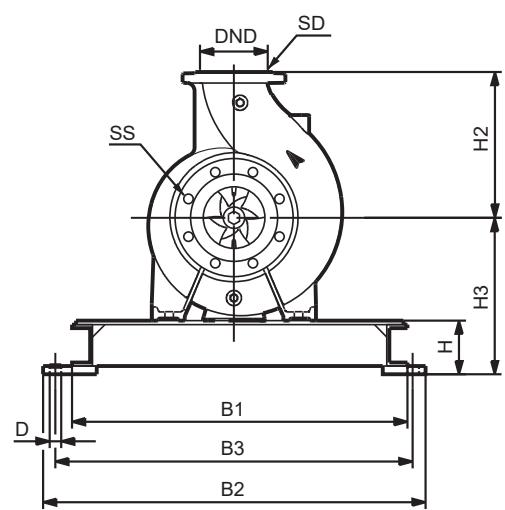
39) S1 is the size of bolt thread for mounting.

40) X: Service dimension.

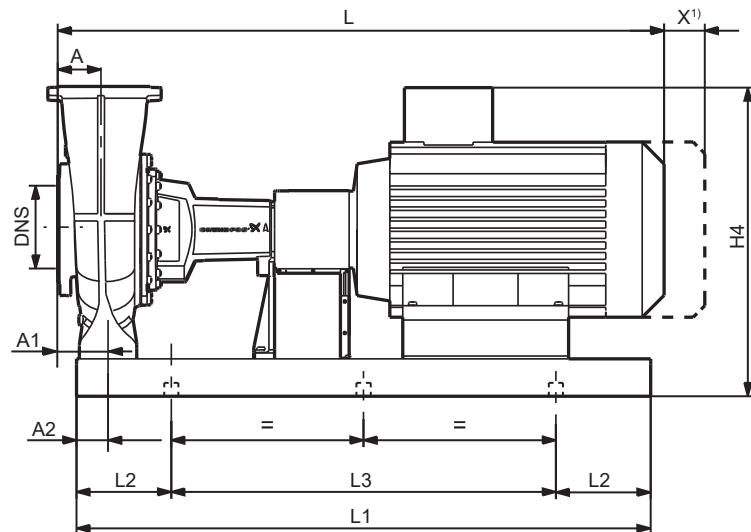
41) For stainless steel and duplex steel versions, s1 is M24.

NKG, dimensional drawings

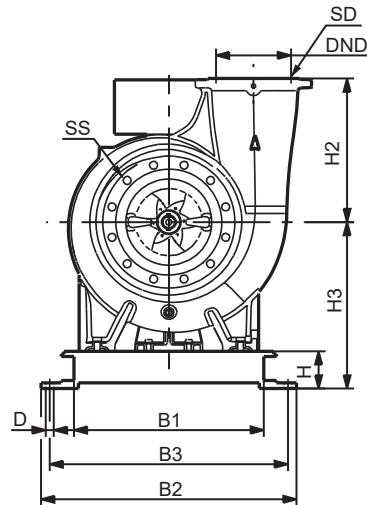
C-channel base frame, center outlet



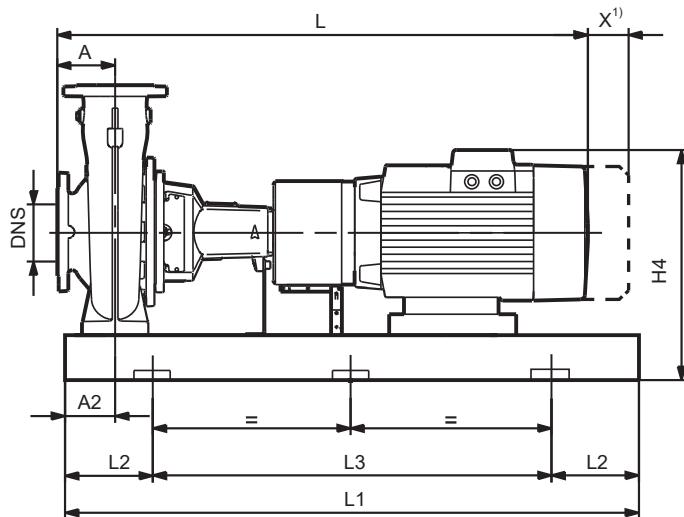
TM034051



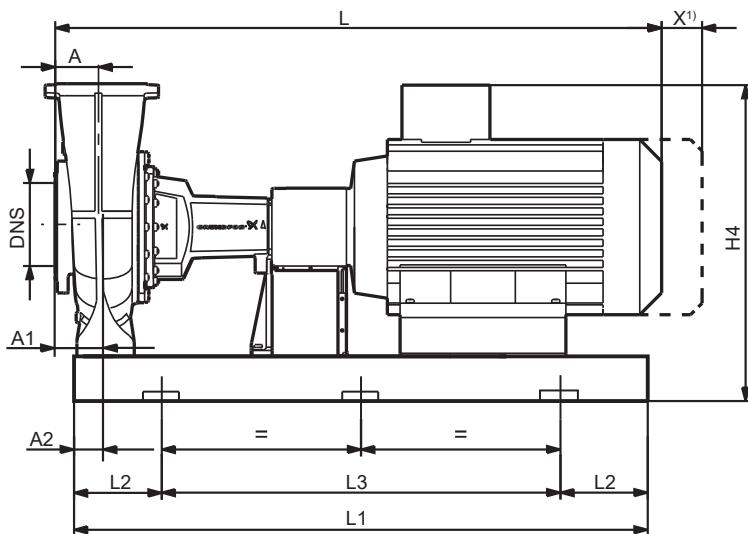
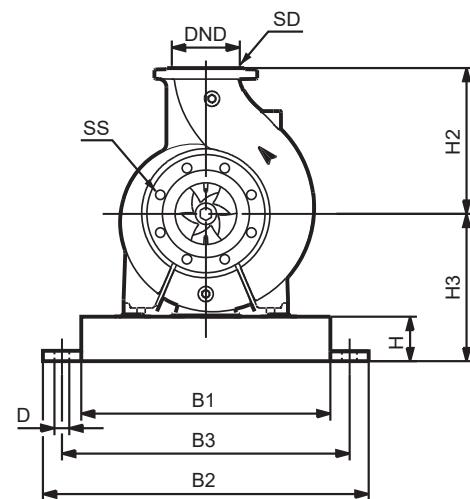
C-channel base frame, tangential outlet



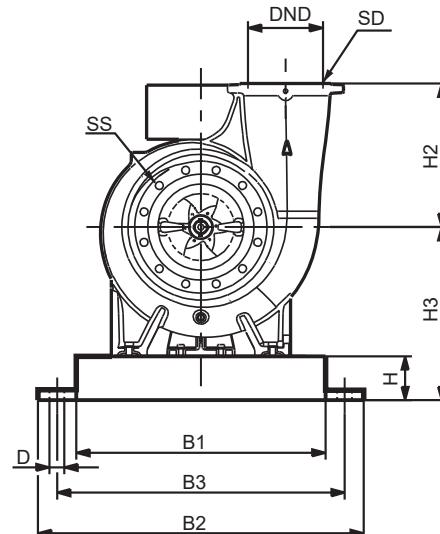
TM046113




EN/ISO base frame, center outlet



EN/ISO base frame, tangential outlet



¹ X: Service dimension. This dimension can be found in section NKG bare-shaft pumps, it equals to the length of the spacer coupling.



NKG dimensions

Standard motors in this table are IE3 motors:

- 2-pole: P2 less than or equal to 22 kW, pump with MG motor; P2 greater than or equal to 30 kW, pump with Siemens motor.
- 4-pole: P2 less than or equal to 15 kW, pump with MG motor; P2 greater than or equal to 18.5 kW, pump with Siemens motor.
- 6-pole: Pump with Siemens motor.

E-motors in this table:

- 2-pole: P2 less than or equal to 22 kW, pump with MGE motor.
- 4-pole: P2 less than or equal to 18.5 kW, pump with MGE motor.

Pump size Poles	Actual impeller size P2 [kW]	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾						
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	NKG	NKGE	EN/ISO		C- channel		
50-32-125,1	0.75	100	16	50	32	4x19	4x19	80	60	140	177	286/-	740/836	-/-	2 ST	2	2	2s
	1.1	110	16	50	32	4x19	4x19	80	60	140	177	286/335	760/856	783/879	2 ST	2	2	2s
	1.5	121	16	50	32	4x19	4x19	80	60	140	180	286/361	800/896	793/889	3B ST	3	5	5s
	2.2	140	16	50	32	4x19	4x19	80	60	140	180	286/361	840/936	793/889	3B ST	3	5	5s
	0.25	121	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
	0.25	139	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
50-32-125	0.37	140	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
	1.1	106	16	50	32	4x19	4x19	80	60	140	177	286/335	760/856	783/879	2 ST	2	2	2s
	1.5	115	16	50	32	4x19	4x19	80	60	140	180	286/361	800/896	793/889	3B ST	3	5	5s
	2.2	130	16	50	32	4x19	4x19	80	60	140	180	286/361	840/936	793/889	3B ST	3	5	5s
	3	142	16	50	32	4x19	4x19	80	60	140	177	297/378	864/960	795/891	3 ST	3	9	9s
	0.25	115	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
50-32-160,1	0.25	130	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
	0.37	142	16	50	32	4x19	4x19	80	60	140	177	286/-	700/786	-/-	2 ST	2	1	1s
	1.5	139	16	50	32	4x19	4x19	80	60	160	212	318/393	800/896	793/889	4B ST	4	5	5s
	2.2	155	16	50	32	4x19	4x19	80	60	160	212	318/393	840/936	793/889	4B ST	4	5	5s
	3	169	16	50	32	4x19	4x19	80	60	160	212	332/413	864/960	795/891	4B ST	4	9	9s
	4	177	16	50	32	4x19	4x19	80	60	160	212	346/413	901/997	795/891	4B ST	4	14	14s
50-32-160	0.25	137	16	50	32	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	0.25	155	16	50	32	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	0.37	172	16	50	32	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	0.55	177	16	50	32	4x19	4x19	80	60	160	212	321/370	740/836	783/879	4B ST	4	2	2s
	2.2	139	16	50	32	4x19	4x19	80	60	160	212	318/393	840/936	793/889	4B ST	4	5	5s
	3	151	16	50	32	4x19	4x19	80	60	160	212	332/413	864/960	795/891	4B ST	4	9	9s
50-32-160	4	163	16	50	32	4x19	4x19	80	60	160	212	346/413	901/997	795/891	4B ST	4	14	14s
	5.5	177	16	50	32	4x19	4x19	80	60	160	215	349/416	946/1036	832/922	5 ST	5	19	19s
	0.25	134	16	50	32	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	0.37	154	16	50	32	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	0.55	170	16	50	32	4x19	4x19	80	60	160	212	321/370	740/836	783/879	4B ST	4	2	2s
	0.75	173	16	50	32	4x19	4x19	80	60	160	212	318/386	790/886	743/839	4B ST	4	5	5s
50-32-200,1	3	172	16	50	32	4x19	4x19	80	60	180	240	360/441	864/960	795/891	4B ST	4	9	9s
	4	188	16	50	32	4x19	4x19	80	60	180	240	374/441	901/997	795/891	4B ST	4	14	14s
	5.5	205	16	50	32	4x19	4x19	80	60	180	240	374/441	946/1036	832/922	5 ST	5	19	19s
	7.5	207	16	50	32	4x19	4x19	80	60	180	240	399/477	934/1024	856/946	5 ST	5	19	19s
	0.37	175	16	50	32	4x19	4x19	80	60	180	240	349/-	700/786	-/-	4B ST	4	1	1s
	0.55	196	16	50	32	4x19	4x19	80	60	180	240	349/398	740/836	783/879	4B ST	4	3	3s
50-32-200,1	0.75	207	16	50	32	4x19	4x19	80	60	180	240	346/414	790/886	743/839	4B ST	4	6	6s

Pump size	Actual impeller size	Flanges					NKG dimensions [mm]						Base frame code ⁴²⁾							
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel				
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling			
50-32-200	4	176	16	50	32	4x19	4x19	80	60	180	240	374/441	901/997	795/891	4B ST	4	14	14s		
	2	5.5	190	16	50	32	4x19	4x19	80	60	180	240	374/441	946/1036	832/922	5 ST	5	19	19s	
	4	7.5	206	16	50	32	4x19	4x19	80	60	180	240	399/477	934/1024	856/946	5 ST	5	19	19s	
	2	11	219	16	50	32	4x19	4x19	80	60	180	245	449/482	1063/1146	880/963	6B ST	6	32	32s	
	4	0.55	184	16	50	32	4x19	4x19	80	60	180	240	349/398	740/836	783/879	4B ST	4	3	3s	
	2	0.75	197	16	50	32	4x19	4x19	80	60	180	240	346/414	790/886	743/839	4B ST	4	6	6s	
50-32-250	4	1.1	216	16	50	32	4x19	4x19	80	60	180	240	346/421	800/896	793/889	4B ST	4	6	6s	
	2	1.5	219	16	50	32	4x19	4x19	80	60	180	240	350/398	840/936	735/831	4B ST	4	6	6s	
	4	5.5	199	16	50	32	4x19	4x19	100	75	225	260	394/461	1075/1171	961/1057	5B ST	5	21	21s	
	2	7.5	219	16	50	32	4x19	4x19	100	75	225	260	419/497	1063/1159	985/1081	5B ST	5	21	21s	
	4	11	244	16	50	32	4x19	4x19	100	75	225	260	464/497	1185/1281	1002/1098	6 ST	6	27	27s	
	2	15	262	16	50	32	4x19	4x19	100	75	225	260	464/561	1185/1281	1185/1281	6 ST	6	27	27s	
65-40-200	4	0.75	206	16	50	32	4x19	4x19	100	75	225	260	366/434	925/1021	878/974	5 ST	5	7	7s	
	2	1.1	236	16	50	32	4x19	4x19	100	75	225	260	366/441	935/1031	928/1024	5 ST	5	7	7s	
	4	1.5	257	16	50	32	4x19	4x19	100	75	225	260	370/418	975/1071	870/966	5 ST	5	7	7s	
	2	2.2	262	16	50	32	4x19	4x19	100	75	225	260	380/461	999/1095	930/1026	5 ST	5	11	11s	
	4	5.5	172	16	65	40	4x19	4x19	100	60	180	240	374/441	966/1056	852/942	5 ST	5	19	19s	
	2	7.5	188	16	65	40	4x19	4x19	100	60	180	240	399/477	954/1044	876/966	5 ST	5	19	19s	
65-40-250	2	11	206	16	65	40	4x19	4x19	100	60	180	245	449/482	1083/1166	900/983	6 ST	6	32	32s	
	4	15	219	16	65	40	4x19	4x19	100	60	180	245	449/546	1083/1166	1083/1166	6 ST	6	32	32s	
	2	0.75	177	16	65	40	4x19	4x19	100	60	180	240	346/414	810/906	763/859	4B ST	4	6	6s	
	4	1.1	198	16	65	40	4x19	4x19	100	60	180	240	346/421	820/916	813/909	4B ST	4	6	6s	
	2	1.5	217	16	65	40	4x19	4x19	100	60	180	240	350/398	860/956	755/851	4B ST	4	6	6s	
	4	2.2	219	16	65	40	4x19	4x19	100	60	180	240	360/441	884/980	815/911	4B ST	4	9	9s	
65-40-315	2	11	211	16	65	40	4x19	4x19	100	75	225	260	464/497	1185/1281	1002/1098	6 ST	6	27	27s	
	4	15	230	16	65	40	4x19	4x19	100	75	225	260	464/561	1185/1281	1185/1281	6 ST	6	27	27s	
	2	18.5	245	16	65	40	4x19	4x19	100	75	225	260	464/561	1229/1325	1229/1325	6 ST	6	27	27s	
	4	22	255	16	65	40	4x19	4x19	100	75	225	265	469/627	1258/1354	1255/1351	6 ST	6	34	34s	
	2	30	260	16	65	40	4x19	4x19	100	75	225	305	620/-	1325/1421	-/-	8 ST	8	111	111s	
	4	1.5	219	16	65	40	4x19	4x19	100	75	225	260	370/418	975/1071	870/966	5 ST	5	7	7s	
65-40-315	4	2.2	242	16	65	40	4x19	4x19	100	75	225	260	380/461	999/1095	930/1026	5 ST	5	11	11s	
	2	3	260	16	65	40	4x19	4x19	100	75	225	260	380/461	999/1095	930/1026	5 ST	5	11	11s	
	4	22	273	16	65	40	4x19	4x19	125	75	250	280	484/642	1283/1379	1280/1376	6 ST	6	34	34s	
	2	30	298	16	65	40	4x19	4x19	125	75	250	305	620/-	1350/1446	-/-	8 ST	8	111	111s	
	4	2	37	318	16	65	40	4x19	4x19	125	75	250	305	620/-	1375/1471	-/-	8 ST	8	111	111s
	4	45	336	16	65	40	4x19	4x19	125	75	250	330	668/-	1447/1543	-/-	8B ST	8	52	52s	
65-50-125	4	45	344	16	65	40	4x19	4x19	125	75	250	330	668/-	1447/1543	-/-	8B ST	8	52	52s	
	2	3	283	16	65	40	8x19	4x19	125	75	250	280	400/481	1024/1120	954/1050	6 ST	6	11	11s	
	4	4	305	16	65	40	4x19	4x19	125	75	250	280	414/481	1061/1157	954/1050	6 ST	6	16	16s	
	2	5.5	334	16	65	40	4x19	4x19	125	75	250	280	439/517	1088/1184	1009/1105	6 ST	6	21	21s	
	4	7.5	344	16	65	40	4x19	4x19	125	75	250	280	439/517	1138/1234	1009/1105	6 ST	6	21	21s	
	2	1.5	105	16	65	50	4x19	4x19	80	60	140	180	286/361	800/896	793/889	3B ST	3	5	5s	
65-50-125	2	2.2	116	16	65	50	4x19	4x19	80	60	140	180	286/361	840/936	793/889	3B ST	3	5	5s	
	2	3	127	16	65	50	4x19	4x19	80	60	140	177	297/378	864/960	797/893	3 ST	3	9	9s	
	4	4	139	16	65	50	4x19	4x19	80	60	140	195	329/396	901/997	797/893	4B ST	4	14	14s	
	2	5.5	142	16	65	50	4x19	4x19	80	60	140	217	351/418	946/1036	834/924	5 ST	5	19	19s	
	4	0.25	116	16	65	50	4x19	4x19	80	60	140	177	286/-	700/786	-/-	3B ST	3	1	1s	
	4	0.37	130	16	65	50	4x19	4x19	80	60	140	177	286/-	700/786	-/-	3B ST	3	1	1s	
	0.55	142	16	65	50	4x19	4x19	80	60	140	177	286/335	740/836	783/879	3B ST	3	2	2s		

Pump size Poles	Actual impeller size P2 [kW]	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾							
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel			
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling		
65-50-160	4	144	16	65	50	4x19	4x19	80	60	160	212	346/413	901/997	797/893	4B ST	4	14	14s	
	2	5.5	158	16	65	50	4x19	4x19	80	60	160	215	349/416	946/1036	834/924	5 ST	5	19	19s
	4	7.5	172	16	65	50	4x19	4x19	80	60	160	215	374/452	934/1024	858/948	5 ST	5	19	19s
	4	11	177	16	65	50	4x19	4x19	80	60	160	245	449/482	1063/1146	882/965	6B ST	6	31	31s
	4	0.37	134	16	65	50	4x19	4x19	80	60	160	212	321/-	700/786	-/-	4B ST	4	1	1s
	4	0.55	151	16	65	50	4x19	4x19	80	60	160	212	321/370	740/836	783/879	4B ST	4	2	2s
	4	0.75	162	16	65	50	4x19	4x19	80	60	160	212	318/386	790/886	743/839	4B ST	4	5	5s
80-50-200	1.1	177	16	65	50	4x19	4x19	80	60	160	212	318/393	800/896	793/889	4B ST	4	5	5s	
	2	11	181	16	80	50	8x19	4x19	100	60	200	245	449/482	1083/1166	900/983	6 ST	6	32	32s
	2	15	198	16	80	50	8x19	4x19	100	60	200	245	449/546	1083/1166	1083/1166	6 ST	6	32	32s
	4	18.5	210	16	80	50	8x19	4x19	100	60	200	245	449/546	1127/1210	1127/1210	6 ST	6	32	32s
	4	22	219	16	80	50	8x19	4x19	100	60	200	265	469/627	1164/1239	1161/1236	6 ST	6	33	33s
	4	1.1	171	16	80	50	8x19	4x19	100	60	200	240	346/421	820/916	813/909	4B ST	4	6	6s
	4	1.5	188	16	80	50	8x19	4x19	100	60	200	240	350/398	860/956	755/851	4B ST	4	6	6s
80-50-250	2	2.2	210	16	80	50	8x19	4x19	100	60	200	240	360/441	884/980	815/911	4B ST	4	9	9s
	3	219	16	80	50	8x19	4x19	100	60	200	240	360/441	884/980	815/911	4B ST	4	9	9s	
	2	15	205	16	80	50	8x19	4x19	125	75	225	260	464/561	1210/1306	1210/1306	6 ST	6	27	27s
	2	18.5	222	16	80	50	8x19	4x19	125	75	225	260	464/561	1254/1350	1254/1350	6 ST	6	27	27s
	4	22	233	16	80	50	8x19	4x19	125	75	225	265	469/627	1283/1379	1280/1376	6 ST	6	34	34s
	4	30	254	16	80	50	8x19	4x19	125	75	225	305	620/-	1350/1446	-/-	8 ST	8	111	111s
	4	37	263	16	80	50	8x19	4x19	125	75	225	305	620/-	1375/1471	-/-	8 ST	8	111	111s
80-50-315	2	2.2	221	16	80	50	8x19	4x19	125	75	225	260	380/461	1024/1120	955/1051	5 ST	5	11	11s
	4	3	241	16	80	50	8x19	4x19	125	75	225	260	380/461	1024/1120	955/1051	5 ST	5	11	11s
	4	4	263	16	80	50	8x19	4x19	125	75	225	260	394/461	1061/1157	955/1051	5B ST	5	16	16s
	4	30	267	16	80	50	8x19	4x19	125	75	280	325	640/-	1350/1446	-/-	8 ST	8	42	42s
	2	37	285	16	80	50	8x19	4x19	125	75	280	325	640/-	1375/1471	-/-	8 ST	8	42	42s
	2	45	300	16	80	50	8x19	4x19	125	75	280	330	668/-	1447/1543	-/-	8B ST	8	52	52s
	4	55	321	16	80	50	8x19	4x19	125	75	280	355	765/-	1516/1612	-/-	9C ST	9	60	60s
80-65-125	4	75	344	25	80	50	8x19	8x19	125	75	280	415	848/-	1589/1685	-/-	10C ST	10	73	73s
	4	4	277	16	80	50	8x19	4x19	125	75	280	305	439/506	1061/1157	954/1050	6 ST	6	17	17s
	4	5.5	303	16	80	50	8x19	4x19	125	75	280	305	464/542	1088/1184	1009/1105	6 ST	6	22	22s
	4	7.5	331	16	80	50	8x19	4x19	125	75	280	305	464/542	1138/1234	1009/1105	6 ST	6	22	22s
	4	11	344	16	80	50	8x19	4x19	125	75	280	305	509/606	1284/1380	1210/1306	6 ST	6	28	28s
	2	3	111	16	80	65	8x19	4x19	100	60	160	212	332/413	884/980	815/911	4B ST	4	9	9s
	2	4	121	16	80	65	8x19	4x19	100	60	160	212	346/413	921/1017	815/911	4B ST	4	14	14s
80-65-160	2	5.5	135	16	80	65	8x19	4x19	100	60	160	215	349/416	966/1056	852/942	5 ST	5	19	19s
	2	7.5	144	16	80	65	8x19	4x19	100	60	160	215	374/452	954/1044	876/966	5 ST	5	19	19s
	4	0.37	112	16	80	65	8x19	4x19	100	60	160	212	321/-	720/806	-/-	4B ST	4	1	1s
	4	0.55	125	16	80	65	8x19	4x19	100	60	160	212	321/370	760/856	803/899	4B ST	4	2	2s
	4	0.75	138	16	80	65	8x19	4x19	100	60	160	212	318/386	810/906	763/859	4B ST	4	5	5s
	4	1.1	144	16	80	65	8x19	4x19	100	60	160	212	318/393	820/916	813/909	4B ST	4	5	5s
	2	5.5	136	16	80	65	8x19	4x19	100	60	180	240	374/441	966/1056	852/942	5 ST	5	19	19s
80-65-160	2	7.5	150	16	80	65	8x19	4x19	100	60	180	240	399/477	954/1044	876/966	5 ST	5	19	19s
	2	11	167	16	80	65	8x19	4x19	100	60	180	245	449/482	1083/1166	900/983	6 ST	6	32	32s
	2	15	177	16	80	65	8x19	4x19	100	60	180	245	449/546	1083/1166	1083/1166	6 ST	6	32	32s
	4	0.55	131	16	80	65	8x19	4x19	100	60	180	240	349/398	760/856	803/899	4B ST	4	3	3s
	4	0.75	139	16	80	65	8x19	4x19	100	60	180	240	346/414	810/906	763/859	4B ST	4	6	6s
	4	1.1	158	16	80	65	8x19	4x19	100	60	180	240	346/421	820/916	813/909	4B ST	4	6	6s
	2	1.5	175	16	80	65	8x19	4x19	100	60	180	240	350/398	860/956	755/851	4B ST	4	6	6s
	2	2.2	177	16	80	65	8x19	4x19	100	60	180	240	360/441	884/980	815/911	4B ST	4	9	9s

Pump size Actual impeller size	PN DNS DND SS SD	Flanges						NKG dimensions [mm]				Base frame code ⁴²⁾			
		A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel				
							NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling			
100-65-200	11 162	16 100 65 8x19 4x19	100 75 225 260 464/497	1185/1321	1002/1138	6 ST	6	27	27s						
	15 177	16 100 65 8x19 4x19	100 75 225 260 464/561	1185/1321	1185/1321	6 ST	6	27	27s						
	18.5 190	16 100 65 8x19 4x19	100 75 225 280 484/581	1229/1365	1229/1365	7B ST	7	27	27s						
	22 198	16 100 65 8x19 4x19	100 75 225 285 489/647	1258/1394	1255/1391	7B ST	7	34	34s						
	30 217	16 100 65 8x19 4x19	100 75 225 305 620/-	1325/1461	-/-	8 ST	8	111	111s						
	37 219	16 100 65 8x19 4x19	100 75 225 305 620/-	1350/1486	-/-	8 ST	8	111	111s						
	1.5 170	16 100 65 8x19 4x19	100 75 225 260 370/418	975/1111	870/1006	5 ST	5	7	7s						
	2.2 189	16 100 65 8x19 4x19	100 75 225 260 380/461	999/1135	930/1066	5 ST	5	11	11s						
	3 205	16 100 65 8x19 4x19	100 75 225 260 380/461	999/1135	930/1066	5 ST	5	11	11s						
	4 219	16 100 65 8x19 4x19	100 75 225 260 394/461	1036/1172	930/1066	5B ST	5	16	16s						
100-65-250	30 223	16 100 65 8x19 4x19	125 90 250 305 620/-	1350/1486	-/-	8 ST	8	111	111s						
	37 238	16 100 65 8x19 4x19	125 90 250 305 620/-	1375/1511	-/-	8 ST	8	111	111s						
	2 45 251	16 100 65 8x19 4x19	125 90 250 330 668/-	1447/1583	-/-	8 ST	8	52	52s						
	55 269	16 100 65 8x19 4x19	125 90 250 360 770/-	1516/1652	-/-	9C ST	9	60	60s						
	75 270	16 100 65 8x19 4x19	125 90 250 415 848/-	1589/1725	-/-	10C ST	10	73	73s						
	3 215	16 100 65 8x19 4x19	125 90 250 280 400/481	1024/1160	954/1090	6 ST	6	11	11s						
	4 232	16 100 65 8x19 4x19	125 90 250 280 414/481	1061/1197	954/1090	6 ST	6	16	16s						
	5.5 254	16 100 65 8x19 4x19	125 90 250 280 439/517	1088/1224	1009/1145	6 ST	6	21	21s						
	7.5 270	16 100 65 8x19 4x19	125 90 250 280 439/517	1138/1274	1009/1145	6 ST	6	21	21s						
	55 272	16 100 65 8x19 4x19	125 90 280 355 765/-	1546/1682	-/-	9C ST	9	60	60s						
100-65-315	75 295	16 100 65 8x19 4x19	125 90 280 415 848/-	1619/1755	-/-	10C ST	10	69	69s						
	90 308	16 100 65 8x19 4x19	125 90 280 415 848/-	1729/1865	-/-	10C ST	10	69	69s						
	110 320	16 100 65 8x19 4x19	125 90 280 455 970/-	1711/1847	-/-	10C ST	10	76	76s						
	5.5 261	16 100 65 8x19 4x19	125 90 280 325 484/562	1118/1254	1039/1175	7 ST	7	22	22As						
	7.5 282	16 100 65 8x19 4x19	125 90 280 325 484/562	1168/1304	1039/1175	7 ST	7	22	22As						
	11 314	16 100 65 8x19 4x19	125 90 280 325 529/626	1314/1450	1240/1376	7B ST	7	28	28As						
	15 320	16 100 65 8x19 4x19	125 90 280 325 529/626	1344/1480	1284/1420	7B ST	7	28	28As						
	4 120-110	16 100 80 8x19 8x19	100 75 180 240 374/441	921/1017	815/911	4B ST	4	14	14s						
	5.5 127	16 100 80 8x19 8x19	100 75 180 240 374/441	966/1056	852/942	5 ST	5	19	19s						
	7.5 137	16 100 80 8x19 8x19	100 75 180 240 399/477	954/1044	876/966	5 ST	5	19	19s						
100-80-125	11 144	16 100 80 8x19 8x19	100 75 180 245 449/482	1083/1166	900/983	6 ST	6	32	32s						
	0.55 121	16 100 80 8x19 8x19	100 75 180 240 349/398	760/856	803/899	4B ST	4	3	3s						
	0.75 130	16 100 80 8x19 8x19	100 75 180 240 346/414	810/906	763/859	4B ST	4	6	6s						
	1.1 144	16 100 80 8x19 8x19	100 75 180 240 346/421	820/916	813/909	4B ST	4	6	6s						
	7.5 143	16 100 80 8x19 8x19	100 75 200 240 399/477	1063/1159	985/1081	5B ST	5	21	21s						
	2 1157	16 100 80 8x19 8x19	100 75 200 245 449/482	1185/1281	1002/1098	6 ST	6	27	27s						
	15 173	16 100 80 8x19 8x19	100 75 200 245 449/546	1185/1281	1185/1281	6 ST	6	27	27s						
	18.5 177	16 100 80 8x19 8x19	100 75 200 245 449/546	1229/1325	1229/1325	6 ST	6	27	27s						
	0.75 135	16 100 80 8x19 8x19	100 75 200 240 346/414	925/1021	878/974	4B ST	4	7	7s						
	1.1 149	16 100 80 8x19 8x19	100 75 200 240 346/421	935/1031	928/1024	4B ST	4	7	7s						
100-80-160	1.5 165	16 100 80 8x19 8x19	100 75 200 240 350/398	975/1071	870/966	4B ST	4	7	7s						
	2.2 177	16 100 80 8x19 8x19	100 75 200 240 360/441	999/1095	930/1026	5 ST	5	11	11s						

Pump size Poles	Actual impeller size P2 [kW]	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾							
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel			
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling		
125-80-160	11	147-127	16	125	80	8x19	8x19	125	75	225	260	464/497	1210/1346	1027/1163	6 ST	6	27	27s	
	15	151	16	125	80	8x19	8x19	125	75	225	260	464/561	1210/1346	1210/1346	6 ST	6	27	27s	
	2	18.5	161	16	125	80	8x19	8x19	125	75	225	280	484/581	1254/1390	1254/1390	7B ST	7	27	27s
	22	167	16	125	80	8x19	8x19	125	75	225	285	489/647	1283/1419	1280/1416	7B ST	7	34	34s	
	30	177	16	125	80	8x19	8x19	125	75	225	305	620/-	1350/1486	-/-	8 ST	8	111	111s	
	1.5	146	16	125	80	8x19	8x19	125	75	225	260	370/418	1000/1136	895/1031	5 ST	5	7	7s	
	4	2.2	161	16	125	80	8x19	8x19	125	75	225	260	380/461	1024/1160	955/1091	5 ST	5	11	11s
	3	175	16	125	80	8x19	8x19	125	75	225	260	380/461	1024/1160	955/1091	5 ST	5	11	11s	
	4	177	16	125	80	8x19	8x19	125	75	225	260	394/461	1061/1197	955/1091	5B ST	5	16	16s	
	22	171	16	125	80	8x19	8x19	125	75	250	285	489/647	1283/1419	1280/1416	7B ST	7	34	34s	
125-80-200	30	188	16	125	80	8x19	8x19	125	75	250	305	620/-	1350/1486	-/-	8 ST	8	111	111s	
	2	37	200	16	125	80	8x19	8x19	125	75	250	305	620/-	1375/1511	-/-	8 ST	8	111	111s
	45	211	16	125	80	8x19	8x19	125	75	250	330	668/-	1447/1583	-/-	8B ST	8	51	51s	
	55	222	16	125	80	8x19	8x19	125	75	250	355	765/-	1516/1652	-/-	9C ST	9	59	59s	
	2.2	164	16	125	80	8x19	8x19	125	75	250	260	380/461	1024/1160	954/1090	6 ST	6	11	11s	
	3	179	16	125	80	8x19	8x19	125	75	250	260	380/461	1024/1160	954/1090	6 ST	6	11	11s	
	4	4	196	16	125	80	8x19	8x19	125	75	250	260	394/461	1061/1197	954/1090	6 ST	6	16	16s
	5.5	214	16	125	80	8x19	8x19	125	75	250	260	419/497	1088/1224	1009/1145	6 ST	6	21	21s	
	7.5	222	16	125	80	8x19	8x19	125	75	250	260	419/497	1138/1274	1009/1145	6 ST	6	21	21s	
	45	220	16	125	80	8x19	8x19	125	90	280	330	668/-	1447/1583	-/-	8 ST	8	52	52s	
125-80-250	55	234	16	125	80	8x19	8x19	125	90	280	355	765/-	1516/1652	-/-	9C ST	9	60	60s	
	2	75	257	16	125	80	8x19	8x19	125	90	280	415	848/-	1589/1725	-/-	10C ST	10	73	73s
	90	270	16	125	80	8x19	8x19	125	90	280	415	848/-	1699/1835	-/-	10C ST	10	69	69s	
	5.5	225	16	125	80	8x19	8x19	125	90	280	325	484/562	1088/1224	1009/1145	7 ST	7	22	22As	
	4	7.5	247	16	125	80	8x19	8x19	125	90	280	325	484/562	1138/1274	1009/1145	7 ST	7	22	22As
	11	270	16	125	80	8x19	8x19	125	90	280	325	529/626	1284/1420	1210/1346	7B ST	7	28	28s	
	90	278	16	125	80	8x19	8x19	125	90	315	415	848/-	1729/1865	-/-	10C ST	10	69	69s	
	110	295	16	125	80	8x19	8x19	125	90	315	450	965/-	1711/1847	-/-	10C ST	10	76	76s	
	2	132	310	16	125	80	8x19	8x19	125	90	315	450	965/-	1876/2012	-/-	10C ST	10	76	76s
	160	328	16	125	80	8x19	8x19	125	90	315	450	965/-	1876/2012	-/-	10C ST	10	82	82s	
125-80-315	200	334	25	125	80	8x19	8x19	125	90	315	450	965/-	2031/2167	-/-	10C ST	10	82	82s	
	11	280	16	125	80	8x19	8x19	125	90	315	350	554/651	1314/1450	1240/1376	7B ST	7	28	28As	
	15	305	16	125	80	8x19	8x19	125	90	315	350	554/651	1344/1480	1284/1420	7B ST	7	28	28As	
	18.5	320	16	125	80	8x19	8x19	125	90	315	350	636/- ⁴⁵⁾	1327/1463	-/- ⁴⁵⁾	7B ST	7	35	35As	
	22	334	16	125	80	8x19	8x19	125	90	315	350	636/- ⁴⁵⁾	1357/1493	-/- ⁴⁵⁾	7B ST	7	35	35s	
	132	333	25	125	80	8x19	8x19	125	90	355	450	965/-	1876/2012	-/-	10C ST	10	75	75s	
	160	349	25	125	80	8x19	8x19	125	90	355	450	965/-	1876/2012	-/-	10C ST	10	81	81s	
	200	388	25	125	80	8x19	8x19	125	90	355	450	965/-	2031/2167	-/-	10C ST	10	81	81s	
	250	400	25	125	80	8x19	8x19	125	90	355	450	950/-	2031/2167	-/-	10C ST	10	96	96s	
	200	372	25	125	80	8x19	8x19	125	90	355	460	975/-	2161/2345	-/-	10C ST	-	115	115s	
125-80-400.1	2	250	398	25	125	80	8x19	8x19	125	90	355	460	960/-	2161/2337	-/-	10C ST	-	96	96s
	315	410	25	125	80	8x19	8x19	125	90	355	460	960/-	2161/2337	-/-	10C ST	-	96	96s	
	18.5	347	16	125	80	8x19	8x19	125	90	355	380	669/- ⁴⁵⁾	1327/1463	-/- ⁴⁵⁾	8 ST	8	36	36s	
	22	365	16	125	80	8x19	8x19	125	90	355	380	669/- ⁴⁵⁾	1357/1493	-/- ⁴⁵⁾	8 ST	8	36	36s	
	4	30	397	16	125	80	8x19	8x19	125	90	355	380	695/-	1405/1541	-/-	8 ST	8	43	43s
	37	419	16	125	80	8x19	8x19	125	90	355	380	718/-	1447/1583	-/-	8B ST	8	53	53s	
	45	438	16	125	80	8x19	8x19	125	90	355	380	718/-	1507/1643	-/-	8B ST	8	53	53s	

Pump size	Actual impeller size	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾							
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel			
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling		
125-100-160	18.5	160-154	16	125	100	8x19	8x19	125	90	280	280	484/642	1127/1250	1127/1250	7B ST	6	27	27s	
	2	22	167	16	125	100	8x19	8x19	125	90	280	300	504/662	1283/1419	1280/1416	7B ST	7	34	34s
	30	176	16	125	100	8x19	8x19	125	90	280	305	620/-	1231/1346	-/-	8 ST	8	111	111s	
	2.2	160-140	16	125	100	8x19	8x19	125	90	280	280	400/481	1024/1160	955/1091	6 ST	6	11	11s	
	4	3	169	16	125	100	8x19	8x19	125	90	280	280	400/481	1024/1160	955/1091	6 ST	6	11	11s
	4	176	16	125	100	8x19	8x19	125	90	280	280	414/481	1061/1197	955/1091	6 ST	6	16	16s	
	0.55	160-140	16	125	100	8x19	8x19	125	90	280	280	400/-	903/1039	-/-	6 ST	6	4	4s	
	6	0.75	169	16	125	100	8x19	8x19	125	90	280	280	408/-	960/1096	-/-	6 ST	6	110	110s
	1.1	176	16	125	100	8x19	8x19	125	90	280	280	408/-	1005/1141	-/-	6 ST	6	110	110s	
	30	170	16	125	100	8x19	8x19	125	90	280	305	620/-	1350/1486	-/-	8 ST	8	111	111s	
125-100-200	37	181	16	125	100	8x19	8x19	125	90	280	305	620/-	1375/1511	-/-	8 ST	8	111	111s	
	2	45	192	16	125	100	8x19	8x19	125	90	280	330	668/-	1447/1583	-/-	8 ST	8	52	52s
	55	203	16	125	100	8x19	8x19	125	90	280	360	770/-	1516/1652	-/-	9C ST	9	60	60s	
	75	219	16	125	100	8x19	8x19	125	90	280	415	848/-	1589/1725	-/-	10C ST	10	73	73s	
	4	178	16	125	100	8x19	8x19	125	90	280	280	414/481	1061/1197	954/1090	6 ST	6	16	16s	
	4	5.5	195	16	125	100	8x19	8x19	125	90	280	280	439/517	1088/1224	1009/1145	6 ST	6	21	21s
	7.5	211	16	125	100	8x19	8x19	125	90	280	280	439/517	1138/1274	1009/1145	6 ST	6	21	21s	
	11	219	16	125	100	8x19	8x19	125	90	280	280	484/581	1284/1420	1210/1346	7B ST	6	27	27s	
	1.1	182	16	125	100	8x19	8x19	125	90	280	280	408/-	1005/1141	-/-	6 ST	6	110	110s	
	6	1.5	193	16	125	100	8x19	8x19	125	90	280	280	446/-	1025/1161	-/-	6 ST	6	11	11s
125-100-250	2.2	214	16	125	100	8x19	8x19	125	90	280	280	457/-	1043/1179	-/-	6 ST	6	16	16s	
	3	219	16	125	100	8x19	8x19	125	90	280	280	482/-	1094/1230	-/-	6 ST	6	21	21s	
	55	205	16	125	100	8x19	8x19	140	90	280	355	765/-	1561/1697	-/-	9C ST	9	60	60s	
	75	229	16	125	100	8x19	8x19	140	90	280	415	848/-	1634/1770	-/-	10C ST	10	69	69s	
	2	90	242	16	125	100	8x19	8x19	140	90	280	415	848/-	1744/1880	-/-	10C ST	10	69	69s
	110	258	16	125	100	8x19	8x19	140	90	280	455	970/-	1726/1862	-/-	10C ST	10	76	76s	
	132	274	16	125	100	8x19	8x19	140	90	280	455	970/-	1891/2027	-/-	10C ST	10	76	76s	
	7.5	215	16	125	100	8x19	8x19	140	90	280	325	484/562	1183/1319	1054/1190	7 ST	7	22	22As	
	4	11	245	16	125	100	8x19	8x19	140	90	280	325	529/626	1329/1465	1255/1391	7B ST	7	28	28As
	15	274	16	125	100	8x19	8x19	140	90	280	325	529/626	1359/1495	1299/1435	7B ST	7	28	28As	
125-100-315	2.2	216	16	125	100	8x19	8x19	140	90	280	325	502/-	1088/1224	-/-	7 ST	7	17	17As	
	6	3	236	16	125	100	8x19	8x19	140	90	280	325	527/-	1139/1275	-/-	7 ST	7	22	22As
	4	260	16	125	100	8x19	8x19	140	90	280	325	527/-	1139/1275	-/-	7 ST	7	22	22As	
	5.5	274	16	125	100	8x19	8x19	140	90	280	325	527/-	1189/1325	-/-	7 ST	7	22	22As	
	110	269	16	125	100	8x19	8x19	140	90	315	450	965/-	1726/1862	-/-	10C ST	10	76	76s	
	2	132	284	16	125	100	8x19	8x19	140	90	315	450	965/-	1891/2027	-/-	10C ST	10	76	76s
	160	301	16	125	100	8x19	8x19	140	90	315	450	965/-	1891/2027	-/-	10C ST	10	82	82s	
	200	322	16	125	100	8x19	8x19	140	90	315	450	965/-	2046/2182	-/-	10C ST	10	82	82s	
	15	279	16	125	100	8x19	8x19	140	90	315	350	554/651	1359/1495	1299/1435	7B ST	7	28	28As	
	4	18.5	295	16	125	100	8x19	8x19	140	90	315	350	636/- ⁴⁵⁾	1342/1478	-/- ⁴⁵⁾	7B ST	7	35	35As
125-100-315	22	312	16	125	100	8x19	8x19	140	90	315	350	636/- ⁴⁵⁾	1372/1508	-/- ⁴⁵⁾	7B ST	7	35	35As	
	30	334	16	125	100	8x19	8x19	140	90	315	355	670/-	1420/1556	-/-	8 ST	8	42	42As	
	4	272	16	125	100	8x19	8x19	140	90	315	350	552/-	1139/1275	-/-	7 ST	7	22	22As	
	6	5.5	301	16	125	100	8x19	8x19	140	90	315	350	552/-	1189/1325	-/-	7 ST	7	22	22As
	7.5	326	16	125	100	8x19	8x19	140	90	315	350	587/-	1278/1414	-/-	7B ST	7	28	28As	
	11	334	16	125	100	8x19	8x19	140	90	315	350	587/-	1338/1474	-/-	7B ST	7	28	28As	

Pump size Poles	Actual impeller size P2 [kW]	Flanges					NKG dimensions [mm]						Base frame code ⁴²⁾						
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel			
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling		
125-100-400	22	334	16	125	100	8x19	8x19	140	110	355	380	669/- ⁴⁵⁾	1372/1508	-/- ⁴⁵⁾	9 ST	9	36	36s	
	30	360	16	125	100	8x19	8x19	140	110	355	380	695/-	1420/1556	-/-	9 ST	9	43	43s	
	4	37	375	16	125	100	8x19	8x19	140	110	355	380	718/-	1462/1598	-/-	9B ST	9	53	53s
	45	395	16	125	100	8x19	8x19	140	110	355	380	718/-	1522/1658	-/-	9B ST	9	53	53s	
	55	415	16	125	100	8x19	8x19	140	110	355	380	790/-	1561/1697	-/-	9B ST	9	61	61s	
	7.5	340	16	125	100	8x19	8x19	140	110	355	380	617/-	1278/1414	-/-	9 ST	9	29	29s	
	6	11	380	16	125	100	8x19	8x19	140	110	355	380	617/-	1338/1474	-/-	9 ST	9	29	29s
150-125-200	15	415	16	125	100	8x19	8x19	140	110	355	380	669/-	1372/1508	-/-	9 ST	9	36	36s	
	45	176-154	16	150	125	8x23	8x19	140	90	315	350	675/-	1463/1599	-/-	8 ST	8	52	52s	
	55	196-166	16	150	125	8x23	8x19	140	90	315	355	747/-	1531/1667	-/-	9C ST	9	60	60s	
	2	75	205	16	150	125	8x23	8x19	140	90	315	415	847/-	1604/1740	-/-	10C ST	10	73	73s
	90	219	16	150	125	8x23	8x19	140	90	315	415	847/-	1714/1850	-/-	10C ST	10	69	69s	
	110	224	16	150	125	8x23	8x19	140	90	315	450	945/-	1716/1852	-/-	10C ST	10	76	76s	
	5.5	176-154	16	150	125	8x23	8x19	140	90	315	350	509/587	1103/1239	1024/1160	7 ST	7	22	22As	
150-125-250	7.5	196-180	16	150	125	8x23	8x19	140	90	315	350	509/587	1153/1289	1024/1160	7 ST	7	22	22As	
	11	219	16	150	125	8x23	8x19	140	90	315	350	554/651	1299/1435	1225/1361	7B ST	7	28	28s	
	15	226	16	150	125	8x23	8x19	140	90	315	350	554/651	1329/1465	1269/1405	7B ST	7	28	28s	
	1.5	176-150	16	150	125	8x23	8x19	140	90	315	350	516/-	1040/1176	-/-	7 ST	7	12	12s	
	2.2	196-182	16	150	125	8x23	8x19	140	90	315	350	527/-	1058/1194	-/-	7 ST	7	17	17s	
	3	215	16	150	125	8x23	8x19	140	90	315	350	552/-	1109/1245	-/-	7 ST	7	22	22As	
	4	226	16	150	125	8x23	8x19	140	90	315	350	552/-	1109/1245	-/-	7 ST	7	22	22As	
150-125-315	90	221	16	150	125	8x23	8x19	140	90	355	415	847/-	1744/1880	-/-	10C ST	10	69	69s	
	110	235	16	150	125	8x23	8x19	140	90	355	450	945/-	1746/1882	-/-	10C ST	10	76	76s	
	2	132	248	16	150	125	8x23	8x19	140	90	355	450	945/-	1906/2042	-/-	10C ST	10	76	76s
	160	261	16	150	125	8x23	8x19	140	90	355	450	945/-	1906/2042	-/-	10C ST	10	82	82s	
	200	269	16	150	125	8x23	8x19	140	90	355	450	945/-	2046/2182	-/-	10C ST	10	82	82s	
	11	220	16	150	125	8x23	8x19	140	90	355	350	554/651	1329/1465	1255/1391	7B ST	7	28	28As	
	15	236	16	150	125	8x23	8x19	140	90	355	350	554/651	1359/1495	1299/1435	7B ST	7	28	28As	
150-125-250	4	18.5	249	16	150	125	8x23	8x19	140	90	355	350	636/- ⁴⁵⁾	1342/1478	-/- ⁴⁵⁾	7B ST	7	35	35As
	22	262	16	150	125	8x23	8x19	140	90	355	350	636/- ⁴⁵⁾	1372/1508	-/- ⁴⁵⁾	7B ST	7	35	35As	
	30	269	16	150	125	8x23	8x19	140	90	355	355	670/-	1420/1556	-/-	8 ST	8	42	42As	
	3	216	16	150	125	8x23	8x19	140	90	355	350	552/-	1139/1275	-/-	7 ST	7	22	22As	
	6	4	232	16	150	125	8x23	8x19	140	90	355	350	552/-	1139/1275	-/-	7 ST	7	22	22As
	5.5	253	16	150	125	8x23	8x19	140	90	355	350	552/-	1189/1325	-/-	7 ST	7	22	22As	
	7.5	269	16	150	125	8x23	8x19	140	90	355	350	587/-	1278/1414	-/-	7B ST	7	28	28As	
150-125-315	132	262	16	150	125	8x23	8x19	140	110	355	450	945/-	1906/2042	-/-	10C ST	10	75	75s	
	160	277	16	150	125	8x23	8x19	140	110	355	450	945/-	1906/2042	-/-	10C ST	10	81	81s	
	2	200	297	16	150	125	8x23	8x19	140	110	355	450	945/-	2046/2182	-/-	10C ST	10	81	81s
	250	317	16	150	125	8x23	8x19	140	110	355	450	950/-	2054/2190	-/-	10C ST	10	96	96s	
	18.5	275	16	150	125	8x23	8x19	140	110	355	380	669/- ⁴⁵⁾	1342/1478	-/- ⁴⁵⁾	9 ST	9	36	36s	
	22	290	16	150	125	8x23	8x19	140	110	355	380	669/- ⁴⁵⁾	1372/1508	-/- ⁴⁵⁾	9 ST	9	36	36s	
	4	30	317	16	150	125	8x23	8x19	140	110	355	380	695/-	1420/1556	-/-	9 ST	9	43	43s
150-125-315	37	336	16	150	125	8x23	8x19	140	110	355	380	718/-	1462/1598	-/-	9B ST	9	53	53s	
	45	338	16	150	125	8x23	8x19	140	110	355	380	718/-	1522/1658	-/-	9B ST	9	53	53s	
	5.5	275	16	150	125	8x23	8x19	140	110	355	385	587/-	1189/1325	-/-	9 ST	9	23	23s	
	6	7.5	297	16	150	125	8x23	8x19	140	110	355	380	617/-	1278/1414	-/-	9 ST	9	29	29s
	11	335	16	150	125	8x23	8x19	140	110	355	380	617/-	1338/1474	-/-	9 ST	9	29	29s	
	15	338	16	150	125	8x23	8x19	140	110	355	380	669/-	1372/1508	-/-	9 ST	9	36	36s	

Pump size Actual impeller size	PN	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾							
		DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel				
		NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling												
150-125-400	37	345	16	150	125	8x23	8x19	140	110	400	415	753/-	1462/1598	-/-	9B ST	9	54	54s	
	45	368	16	150	125	8x23	8x19	140	110	400	415	753/-	1522/1658	-/-	9B ST	9	54	54s	
	4	55	392	16	150	125	8x23	8x19	140	110	400	415	825/-	1561/1697	-/-	9B ST	9	62	62s
	75	433	16	150	125	8x23	8x19	140	110	400	445	878/-	1634/1770	-/-	10A ST	10	67	67s	
	90	438	16	150	125	8x23	8x19	140	110	400	445	878/-	1744/1880	-/-	10A ST	10	67	67s	
	11	351	16	150	125	8x23	8x19	140	110	400	415	652/-	1338/1474	-/-	9 ST	9	30	30s	
	15	384	16	150	125	8x23	8x19	140	110	400	415	701/-	1372/1508	-/-	9 ST	9	37	37s	
	6	18.5	410	16	150	125	8x23	8x19	140	110	400	415	730/-	1395/1531	-/-	9 ST	9	44	44s
	22	434	16	150	125	8x23	8x19	140	110	400	415	730/-	1420/1556	-/-	9 ST	9	44	44s	
	30	438	16	150	125	8x23	8x19	140	110	400	415	753/-	1522/1658	-/-	9B ST	9	54	54s	
150-125-500	55	406	16	150	125	8x23	8x19	180	110	500	530	940/-	1741/1917	-/-	10B ST	10	57	57s	
	75	447	16	150	125	8x23	8x19	180	110	500	530	963/-	1814/1990	-/-	10A ST	10	65	65s	
	4	90	473	16	150	125	8x23	8x19	180	110	500	530	963/-	1924/2100	-/-	10A ST	10	65	65s
	110	500	16	150	125	8x23	8x19	180	110	500	530	1045/-	1936/2112	-/-	10A ST	10	79	79s	
	132	526	16	150	125	8x23	8x19	180	110	500	530	1045/-	2101/2277	-/-	10A ST	10	84	84s	
	160	548	16	150	125	8x23	8x19	180	110	500	530	1045/-	2101/2277	-/-	10A ST	10	84	84s	
	18.5	421	16	150	125	8x23	8x19	180	110	500	530	845/-	1575/1751	-/-	10B ST	10	46	46s	
	22	445	16	150	125	8x23	8x19	180	110	500	530	845/-	1600/1776	-/-	10B ST	10	46	46s	
	6	30	493	16	150	125	8x23	8x19	180	110	500	530	868/-	1702/1878	-/-	10B ST	10	49	49s
	37	524	16	150	125	8x23	8x19	180	110	500	530	940/-	1741/1917	-/-	10B ST	10	57	57s	
200-150-200	45	546	16	150	125	8x23	8x19	180	110	500	530	963/-	1814/1990	-/-	10A ST	10	65	65s	
	55	548	16	150	125	8x23	8x19	180	110	500	530	963/-	1814/1990	-/-	10A ST	10	65	65s	
	75	216-176	16	200	150	12x23	8x23	160	110	400	415	848/-	1624/1800	-/-	10C ST	10	68	68s	
	2	90	218-202	16	200	150	12x23	8x23	160	110	400	415	848/-	1734/1910	-/-	10C ST	10	68	68s
	110	224	16	200	150	12x23	8x23	160	110	400	450	965/-	1716/1892	-/-	10C ST	10	75	75s	
	7.5	210-158	16	200	150	12x23	8x23	160	110	400	385	544/622	1173/1349	1044/1220	9 ST	9	23	23s	
	4	11	218-208	16	200	150	12x23	8x23	160	110	400	380	584/681	1319/1495	1245/1421	9 ST	9	29	29s
	15	224	16	200	150	12x23	8x23	160	110	400	380	584/681	1349/1525	1289/1465	9 ST	9	29	29s	
	2.2	210-168	16	200	150	12x23	8x23	160	110	400	380	557/-	1078/1254	-/-	9 ST	9	18	18s	
	6	3	218-200	16	200	150	12x23	8x23	160	110	400	385	587/-	1129/1305	-/-	9 ST	9	23	23s
200-150-250	4	224	16	200	150	12x23	8x23	160	110	400	385	587/-	1129/1305	-/-	9 ST	9	23	23s	
	132	226-220	16	200	150	12x23	8x23	160	110	375	450	965/-	1911/2087	-/-	10C ST	10	75	75s	
	2	160	235	16	200	150	12x23	8x23	160	110	375	450	965/-	1911/2087	-/-	10C ST	10	81	81s
	200	250	16	200	150	12x23	8x23	160	110	375	450	965/-	2066/2242	-/-	10C ST	10	81	81s	
	250	265	16	200	150	12x23	8x23	160	110	375	450	950/-	2066/2242	-/-	10C ST	10	96	96s	
	15	226-214	16	200	150	12x23	8x23	160	110	375	380	584/681	1379/1555	1319/1495	9 ST	9	29	29s	
	18.5	230	16	200	150	12x23	8x23	160	110	375	380	669/- ⁴⁵⁾	1362/1538	-/- ⁴⁵⁾	9 ST	9	36	36s	
	22	242	16	200	150	12x23	8x23	160	110	375	380	669/- ⁴⁵⁾	1392/1568	-/- ⁴⁵⁾	9 ST	9	36	36s	
	30	262	16	200	150	12x23	8x23	160	110	375	380	695/-	1440/1616	-/-	9 ST	9	43	43s	
	37	275	16	200	150	12x23	8x23	160	110	375	380	718/-	1482/1658	-/-	9B ST	9	53	53s	
200-150-350	45	282	16	200	150	12x23	8x23	160	110	375	380	718/-	1542/1718	-/-	9B ST	9	53	53s	
	5.5	235	16	200	150	12x23	8x23	160	110	375	385	587/-	1209/1385	-/-	9 ST	9	23	23As	
	6	7.5	252	16	200	150	12x23	8x23	160	110	375	380	617/-	1298/1474	-/-	9 ST	9	29	29s
	11	282	16	200	150	12x23	8x23	160	110	375	380	617/-	1358/1534	-/-	9 ST	9	29	29s	

Pump size Poles	Actual impeller size P2 [kW]	Flanges					NKG dimensions [mm]					Base frame code ⁴²⁾							
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel			
												NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling		
200-150-315	250	266	16	200	150	12x23	8x23	160	110	400	450	950/-	2206/2382	-/-	10C ST	10	100	100s	
	2	315	286	16	200	150	12x23	8x23	160	110	400	450	950/-	2206/2382	-/-	10C ST	10	100	100s
	355	291	16	200	150	12x23	8x23	160	110	400	500	1190/-	2431/2607	-/-	10C ST	-	108	108s	
	4	37	275	16	200	150	12x23	8x23	160	110	400	415	753/-	1622/1798	-/-	9B ST	9	54	54s
	45	291	16	200	150	12x23	8x23	160	110	400	415	753/-	1682/1858	-/-	9B ST	9	54	54s	
	55	310	16	200	150	12x23	8x23	160	110	400	415	825/-	1721/1897	-/-	9B ST	9	62	62s	
	75	336	16	200	150	12x23	8x23	160	110	400	445	878/-	1794/1970	-/-	10A ST	10	67	67s	
	90	338	16	200	150	12x23	8x23	160	110	400	445	878/-	1904/2080	-/-	10A ST	10	67	67s	
	11	280	16	200	150	12x23	8x23	160	110	400	415	652/-	1498/1674	-/-	9 ST	9	30	30s	
	15	305	16	200	150	12x23	8x23	160	110	400	415	701/-	1532/1708	-/-	9 ST	9	37	37s	
200-150-315.2	6	18.5	322	16	200	150	12x23	8x23	160	110	400	415	730/-	1555/1731	-/-	9 ST	9	44	44s
	22	337	16	200	150	12x23	8x23	160	110	400	415	730/-	1580/1756	-/-	9 ST	9	44	44s	
	30	338	16	200	150	12x23	8x23	160	110	400	415	753/-	1682/1858	-/-	9B ST	9	54	54s	
	160	244	16	200	150	12x23	8x23	160	110	400	450	970/-	2191/2367	-/-	10C ST	10	85	85s	
	200	262	16	200	150	12x23	8x23	160	110	400	450	970/-	2206/2382	-/-	10C ST	10	85	85s	
	2	250	280	16	200	150	12x23	8x23	160	110	400	450	950/-	2198/2374	-/-	10C ST	10	100	100s
	315	303	16	200	150	12x23	8x23	160	110	400	450	950/-	2198/2374	-/-	10C ST	10	100	100s	
	355	317	16	200	150	12x23	8x23	160	110	400	500	1190/-	2198/2374	-/-	10C ST	-	108	108s	
	22	250	16	200	150	12x23	8x23	160	110	400	415	701/- ⁴⁵⁾	1532/1708	-/- ⁴⁵⁾	9 ST	9	38	38s	
	30	275	16	200	150	12x23	8x23	160	110	400	415	730/-	1580/1756	-/-	9 ST	9	45	45s	
200-150-400	4	37	294	16	200	150	12x23	8x23	160	110	400	415	753/-	1622/1798	-/-	9B ST	9	48	48s
	45	314	16	200	150	12x23	8x23	160	110	400	415	753/-	1682/1858	-/-	9B ST	9	48	48s	
	55	334	16	200	150	12x23	8x23	160	110	400	415	825/-	1721/1897	-/-	9B ST	9	56	56s	
	75	342	16	200	150	12x23	8x23	160	110	400	445	878/-	1794/1970	-/-	10A ST	10	67	67s	
	7.5	259	16	200	150	12x23	8x23	160	110	400	415	652/-	1438/1614	-/-	9 ST	9	24	24s	
	6	11	293	16	200	150	12x23	8x23	160	110	400	415	652/-	1498/1674	-/-	9 ST	9	24	24s
	15	328	16	200	150	12x23	8x23	160	110	400	415	701/-	1532/1708	-/-	9 ST	9	38	38s	
	18.5	342	16	200	150	12x23	8x23	160	110	400	415	730/-	1555/1731	-/-	9 ST	9	44	44s	
	55	343	16	200	150	12x23	8x23	160	110	450	415	825/-	1721/1897	-/-	9B ST	9	56	56s	
	75	375	16	200	150	12x23	8x23	160	110	450	445	878/-	1794/1970	-/-	10A ST	10	64	64s	
200-150-500	4	90	394	16	200	150	12x23	8x23	160	110	450	445	878/-	1904/2080	-/-	10A ST	10	64	64s
	110	412	16	200	150	12x23	8x23	160	110	450	450	965/-	1916/2092	-/-	10A ST	10	80	80s	
	132	431	16	200	150	12x23	8x23	160	110	450	450	965/-	2081/2257	-/-	10A ST	10	85	85s	
	160	438	16	200	150	12x23	8x23	160	110	450	450	965/-	2081/2257	-/-	10A ST	10	85	85s	
	18.5	357	16	200	150	12x23	8x23	160	110	450	415	730/-	1555/1731	-/-	9 ST	9	45	45s	
	22	375	16	200	150	12x23	8x23	160	110	450	415	730/-	1580/1756	-/-	9 ST	9	45	45s	
	6	30	408	16	200	150	12x23	8x23	160	110	450	415	753/-	1682/1858	-/-	9B ST	9	48	48s
	37	430	16	200	150	12x23	8x23	160	110	450	415	825/-	1721/1897	-/-	9B ST	9	56	56s	
	45	438	16	200	150	12x23	8x23	160	110	450	445	878/-	1794/1970	-/-	10A ST	10	64	64s	
	132	459	16	200	150	12x23	8x23	180	110	500	530	1045/-	2101/2277	-/-	10A ST	10	84	84s	
4	160	489	16	200	150	12x23	8x23	180	110	500	530	1045/-	2101/2277	-/-	10A ST	10	84	84s	
	200	521	16	200	150	12x23	8x23	180	110	500	530	1045/-	2256/2432	-/-	10A ST	10	84	84s	
	250	548	16	200	150	12x23	8x23	180	110	500	530	1030/-	2256/2432	-/-	10A ST	10	99	99s	
	37	457	16	200	150	12x23	8x23	180	110	500	530	940/-	1741/1917	-/-	10B ST	10	57	57s	
	45	483	16	200	150	12x23	8x23	180	110	500	530	963/-	1814/1990	-/-	10A ST	10	65	65s	
	55	513	16	200	150	12x23	8x23	180	110	500	530	963/-	1814/1990	-/-	10A ST	10	65	65s	
	75	548	16	200	150	12x23	8x23	180	110	500	530	1045/-	1936/2112	-/-	10A ST	10	79	79s	

Pump size Actual impeller size	PN DNS DND SS SD	Flanges						NKG dimensions [mm]				Base frame code ⁴²⁾			
		A	A2	H2	H3	H4 ⁴³⁾	L ⁴⁴⁾		EN/ISO		C-channel				
							NKG	NKGE	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling			
250-200-400	37 280	16 250 200 12x28 12x23	170 110 400 530	868/-	1660/1836	-/-	10E	10F	49	49s					
	45 296	16 250 200 12x28 12x23	170 110 400 530	868/-	1720/1896	-/-	10E	10F	49	49s					
	55 312	16 250 200 12x28 12x23	170 110 400 530	940/-	1759/1935	-/-	10E	10F	57	57s					
	4 75 344	16 250 200 12x28 12x23	170 110 400 530	963/-	1832/2008	-/-	10E	10D	65	65s					
	90 364	16 250 200 12x28 12x23	170 110 400 530	963/-	1942/2118	-/-	10F	10D	65	65s					
	110 392	16 250 200 12x28 12x23	170 110 400 530	1050/-	1954/2130	-/-	10F	10D	79	79s					
	132 404	16 250 200 12x28 12x23	170 110 400 530	1050/-	2119/2295	-/-	10D	10D	84	84s					
	15 308	16 250 200 12x28 12x23	170 110 400 530	816/-	1570/1746	-/-	10E	10E	39	39s					
	18.5 328	16 250 200 12x28 12x23	170 110 400 530	845/-	1593/1769	-/-	10E	10F	46	46s					
	6 22 348	16 250 200 12x28 12x23	170 110 400 530	845/-	1618/1794	-/-	10E	10F	46	46s					
250-200-450	30 384	16 250 200 12x28 12x23	170 110 400 530	868/-	1720/1896	-/-	10E	10F	49	49s					
	37 404	16 250 200 12x28 12x23	170 110 400 530	940/-	1759/1935	-/-	10E	10F	57	57s					
	75 367	16 250 200 12x28 12x23	150 110 450 530	963/-	1805/1981	-/-	10E	10D	65	65s					
	90 391	16 250 200 12x28 12x23	150 110 450 530	963/-	1915/2091	-/-	10F	10D	65	65s					
	4 110 415	16 250 200 12x28 12x23	150 110 450 530	1050/-	1927/2103	-/-	10F	10D	79	79s					
	132 435	16 250 200 12x28 12x23	150 110 450 530	1050/-	2092/2268	-/-	10D	10D	84	84s					
	160 455	16 250 200 12x28 12x23	150 110 450 530	1050/-	2092/2268	-/-	10D	10D	84	84s					
	18.5 355	16 250 200 12x28 12x23	150 110 450 530	845/-	1566/1742	-/-	10E	10F	46	46s					
	22 371	16 250 200 12x28 12x23	150 110 450 530	845/-	1591/1767	-/-	10E	10F	46	46s					
	6 30 407	16 250 200 12x28 12x23	150 110 450 530	868/-	1693/1869	-/-	10E	10F	49	49s					
300-250-350	37 431	16 250 200 12x28 12x23	150 110 450 530	940/-	1732/1908	-/-	10E	10F	57	57s					
	45 451	16 250 200 12x28 12x23	150 110 450 530	963/-	1805/1981	-/-	10E	10D	65	65s					
	37 266	16 300 250 12x28 12x28	180 110 400 580	918/-	1711/1887	-/-	10E	10F	50	50s					
	45 294	16 300 250 12x28 12x28	180 110 400 580	918/-	1771/1947	-/-	10E	10F	50	50s					
	4 55 318	16 300 250 12x28 12x28	180 110 400 580	990/-	1810/1986	-/-	10E	10F	58	58s					
	75 362	16 300 250 12x28 12x28	180 110 400 580	1013/-	1883/2059	-/-	10F	10D	66	66s					
	90 370	16 300 250 12x28 12x28	180 110 400 580	1013/-	1993/2169	-/-	10F	10D	66	66s					
	11 277	16 300 250 12x28 12x28	180 110 400 580	817/-	1587/1763	-/-	10E	10E	26	26s					
	15 306	16 300 250 12x28 12x28	180 110 400 580	866/-	1621/1797	-/-	10E	10E	40	40s					
	18.5 330	16 300 250 12x28 12x28	180 110 400 580	895/-	1644/1820	-/-	10E	10F	47	47s					
300-250-400	22 366	16 300 250 12x28 12x28	180 110 400 580	895/-	1669/1845	-/-	10E	10F	47	47s					
	45 281	16 300 250 12x28 12x28	160 110 500 580	918/-	1726/1902	-/-	10E	10F	50	50s					
	55 301	16 300 250 12x28 12x28	160 110 500 580	990/-	1765/1941	-/-	10E	10F	58	58s					
	75 329	16 300 250 12x28 12x28	160 110 500 580	1013/-	1838/2014	-/-	10F	10D	66	66s					
	4 90 349	16 300 250 12x28 12x28	160 110 500 580	1013/-	1948/2124	-/-	10F	10D	66	66s					
	110 365	16 300 250 12x28 12x28	160 110 500 580	1100/-	1960/2136	-/-	10F	10D	78	78s					
	132 385	16 300 250 12x28 12x28	160 110 500 580	1100/-	2125/2301	-/-	10F	10D	83	83s					
	160 405	16 300 250 12x28 12x28	160 110 500 580	1100/-	2125/2301	-/-	10F	10D	83	83s					
	15 289	16 300 250 12x28 12x28	160 110 500 580	866/-	1576/1752	-/-	10E	10E	40	40s					
	18.5 313	16 300 250 12x28 12x28	160 110 500 580	895/-	1599/1775	-/-	10E	10F	47	47s					
6	22 329	16 300 250 12x28 12x28	160 110 500 580	895/-	1624/1800	-/-	10E	10F	47	47s					
	30 361	16 300 250 12x28 12x28	160 110 500 580	918/-	1726/1902	-/-	10E	10F	50	50s					
	37 381	16 300 250 12x28 12x28	160 110 500 580	990/-	1765/1941	-/-	10E	10F	58	58s					
	45 401	16 300 250 12x28 12x28	160 110 500 580	1013/-	1838/2014	-/-	10F	10D	66	66s					

Pump size Poles	Actual impeller size P2 [kW]	Flanges		NKG dimensions [mm]							Base frame code ⁴²⁾								
		PN	DNS	DND	SS	SD	A	A2	H2	H3	H4 ⁴³⁾	NKG	NKGE	EN/ISO	C-channel				
							L ⁴⁴⁾	Standard coupling	Spacer coupling	Standard coupling	Spacer coupling			Standard coupling	Spacer coupling				
300-250-450	75	325	16	300	250	12x28	12x28	165	110	500	580	1013/-	1833/2009	-/-	10F	10D	66	66s	
	90	341	16	300	250	12x28	12x28	165	110	500	580	1013/-	1943/2119	-/-	10F	10D	66	66s	
	4	110	361	16	300	250	12x28	12x28	165	110	500	580	1100/-	1955/2131	-/-	10F	10D	78	78s
	132	381	16	300	250	12x28	12x28	165	110	500	580	1100/-	2120/2296	-/-	10F	10D	83	83s	
	160	401	16	300	250	12x28	12x28	165	110	500	580	1100/-	2120/2296	-/-	10F	10D	83	83s	
	200	445	16	300	250	12x28	12x28	165	110	500	580	1100/-	2275/2451	-/-	10F	10D	83	83s	
	18.5	313	16	300	250	12x28	12x28	165	110	500	580	895/-	1594/1770	-/-	10E	10F	47	47s	
	22	325	16	300	250	12x28	12x28	165	110	500	580	895/-	1619/1795	-/-	10E	10F	47	47s	
	6	30	357	16	300	250	12x28	12x28	165	110	500	580	918/-	1721/1897	-/-	10E	10F	50	50s
	37	377	16	300	250	12x28	12x28	165	110	500	580	990/-	1760/1936	-/-	10E	10F	58	58s	
300-250-500	45	397	16	300	250	12x28	12x28	165	110	500	580	1013/-	1833/2009	-/-	10F	10D	66	66s	
	55	433	16	300	250	12x28	12x28	165	110	500	580	1013/-	1723/1899	-/-	10F	10D	66	66s	
	160	417	16	300	250	12x28	12x28	165	110	500	580	1100/-	2125/2301	-/-	10F	10D	83	83s	
	200	445	16	300	250	12x28	12x28	165	110	500	580	1100/-	2280/2456	-/-	10F	10D	83	83s	
	4	250	485	16	300	250	12x28	12x28	165	110	500	580	1080/-	2280/2456	-/-	10F	10D	98	98s
	315	525	16	300	250	12x28	12x28	165	110	500	580	1080/-	2400/2525	-/-	10F	10D	98	98s	
	45	409	16	300	250	12x28	12x28	165	110	500	580	1013/-	1838/2014	-/-	10E	10D	66	66s	
	6	55	437	16	300	250	12x28	12x28	165	110	500	580	1013/-	1728/1904	-/-	10F	10D	66	66s
350-300-305	75	485	16	300	250	12x28	12x28	165	110	500	580	1100/-	1960/2136	-/-	10F	10D	78	78s	
	90	525	16	300	250	12x28	12x28	165	110	500	580	1100/-	2125/2301	-/-	10F	10D	83	83s	
	75	328-212	16	350	300	16x28	12x28												
	90	340-240	16	350	300	16x28	12x28												
	4	110	350-294	16	350	300	16x28	12x28											
	132	346	16	350	300	16x28	12x28												
	160	350	16	350	300	16x28	12x28												
	18.5	310-194	16	350	300	16x28	12x28												
	22	328-212	16	350	300	16x28	12x28												
	6	30	350-246	16	350	300	16x28	12x28											
350-300-305	37	342	16	350	300	16x28	12x28												
	45	350	16	350	300	16x28	12x28												
	11	336-236	16	350	300	16x28	12x28												
	8	15	338	16	350	300	16x28	12x28											
	18.5	350	16	350	300	16x28	12x28												

Note: NKG 350-300-305 is available with PN 10 pump flanges, the PN 10 flange dimensions of Ss is 16x23, Sd is 12x23.

This model is only available as bare shaft pump.

⁴²⁾ EN/ISO base frame, see section NKG with EN/ISO base frames, dimensional sketches, C-channel base frame, see section NKG with C-channel base frames, dimensional sketches.

⁴³⁾ Pump with standard motor / pump with E-motor.

⁴⁴⁾ Pump with standard coupling / pump with spacer coupling.

⁴⁵⁾ Pump with Siemens motor with integrated CUE, see section NKGE (Siemens motor with integrated CUE), dimensional drawings.

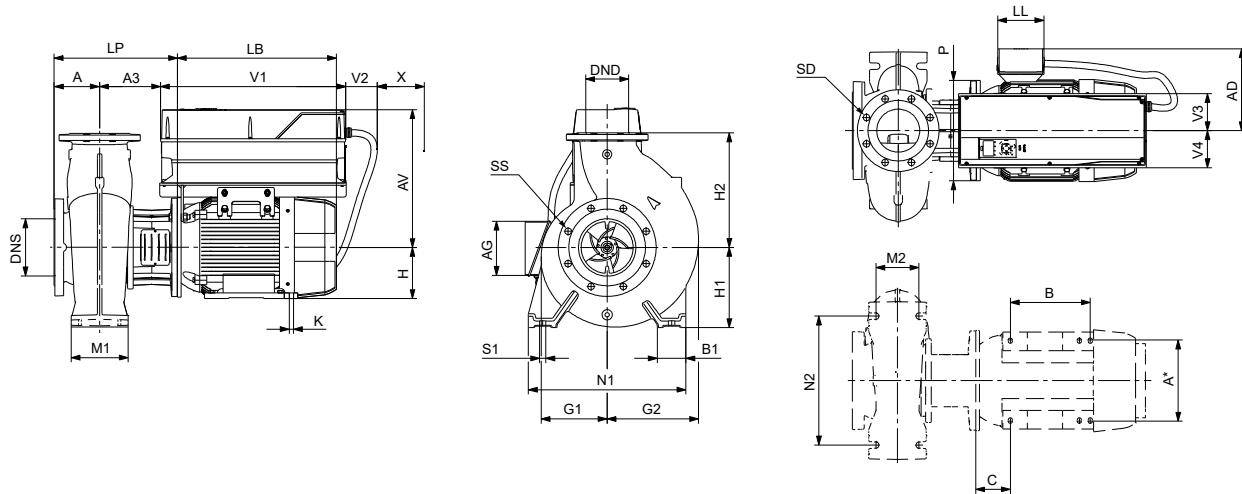
Related information

[NKG \(Siemens motor with integrated CUE\), dimensional drawings](#)

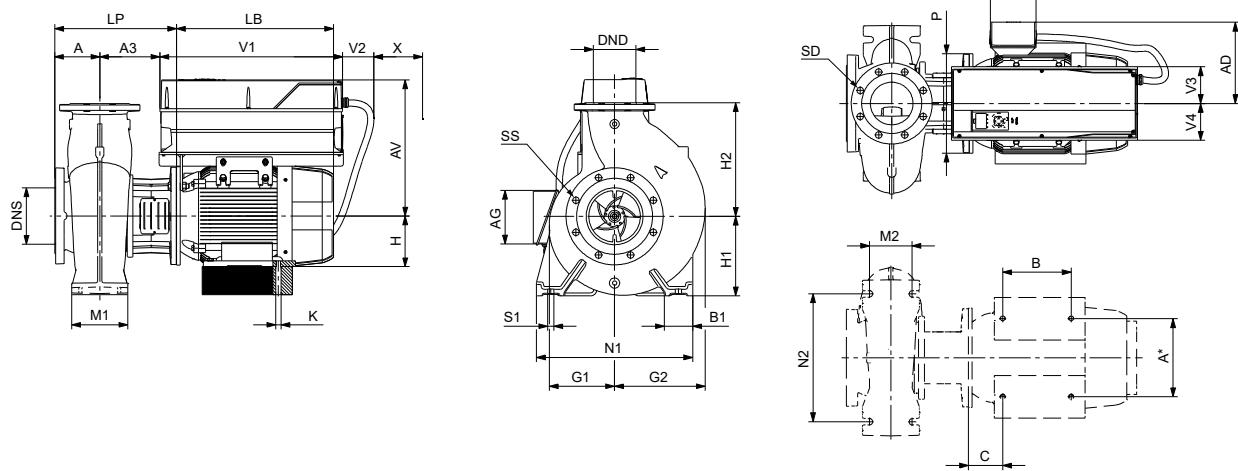
[NKG with EN/ISO base frames, dimensional sketches](#)

[NKG with C-channel base frames, dimensional sketches](#)

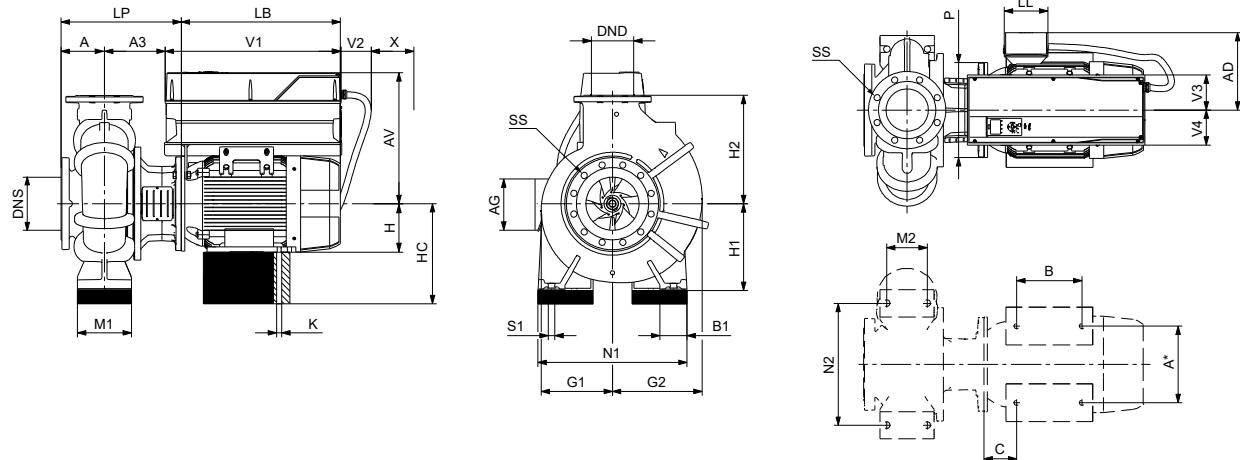
NBGE (Siemens motor with integrated CUE), dimensional drawings



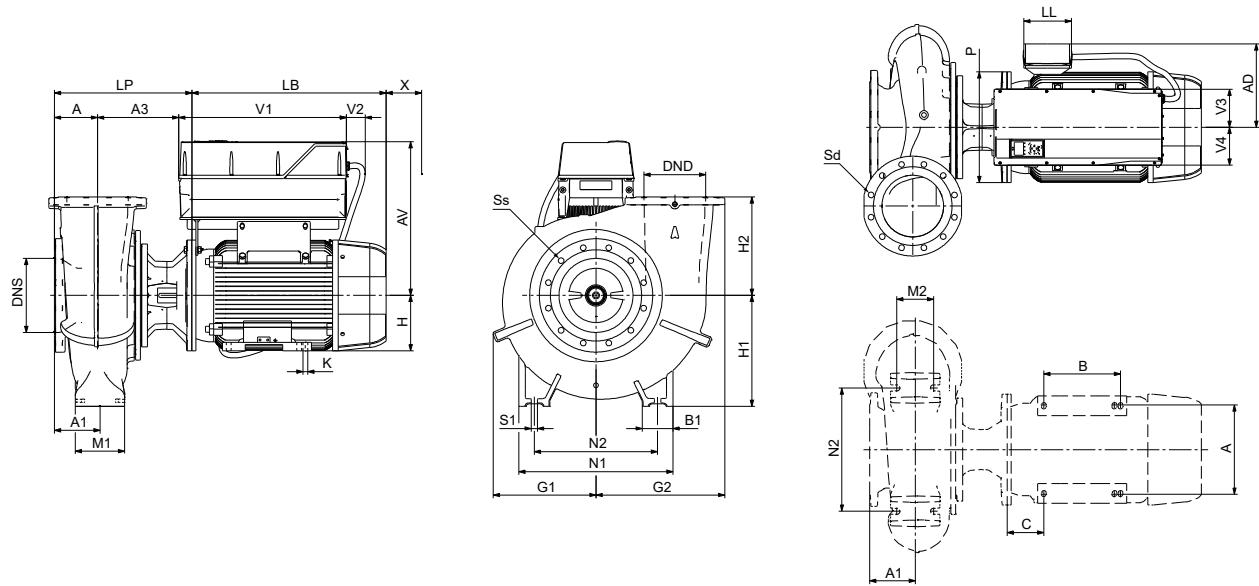
Mounting design C1



Mounting design C1 with support blocks under the motor (Variant 1b in section Support blocks)



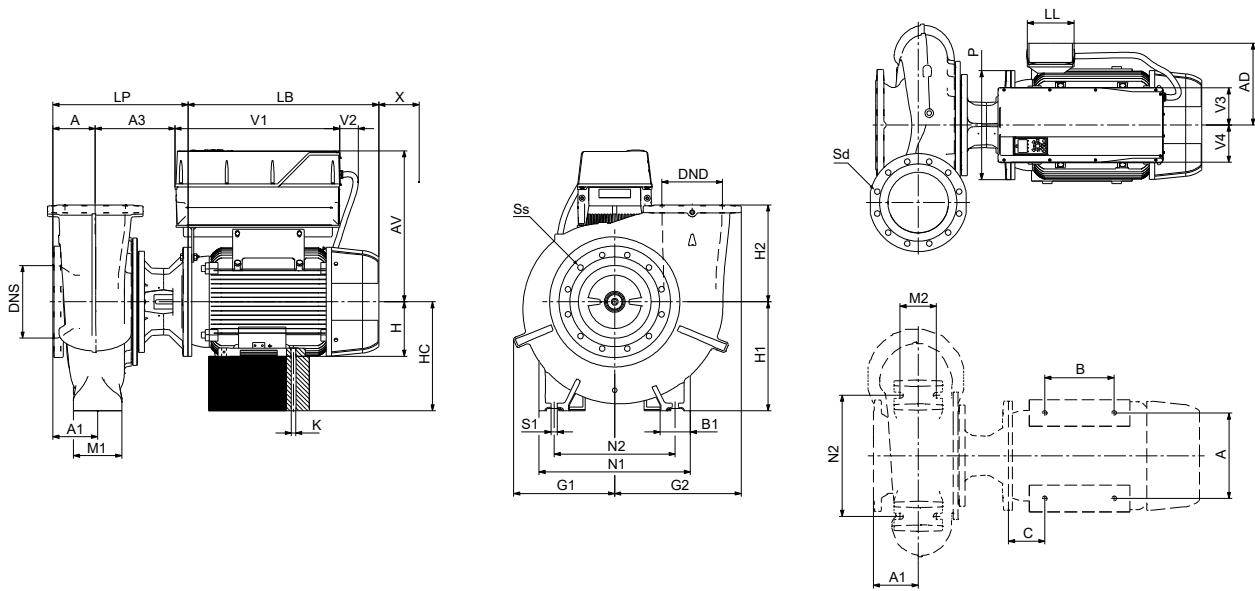
TM080773

Mounting design C1 with support blocks under the motor and pump housing (Variant 3 in section Support blocks)

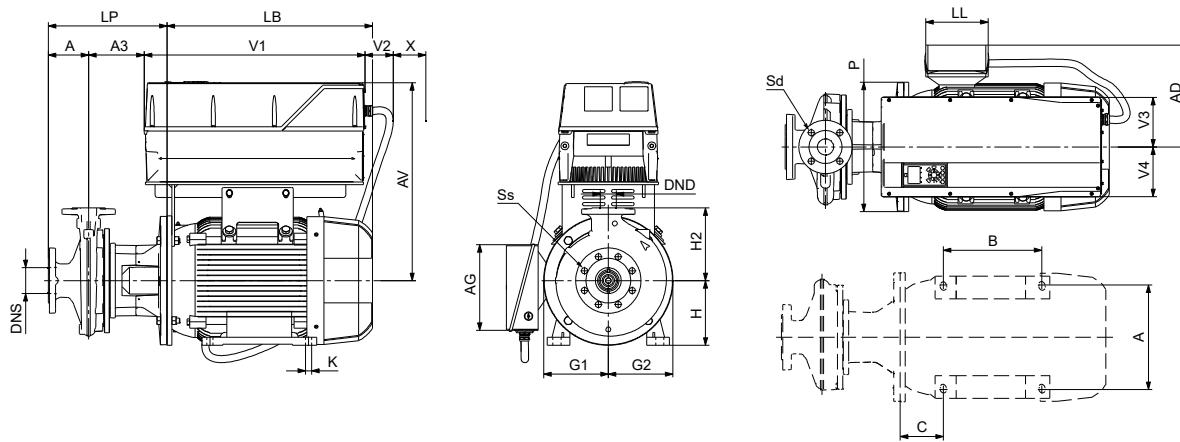
TM082361

Mounting design C2

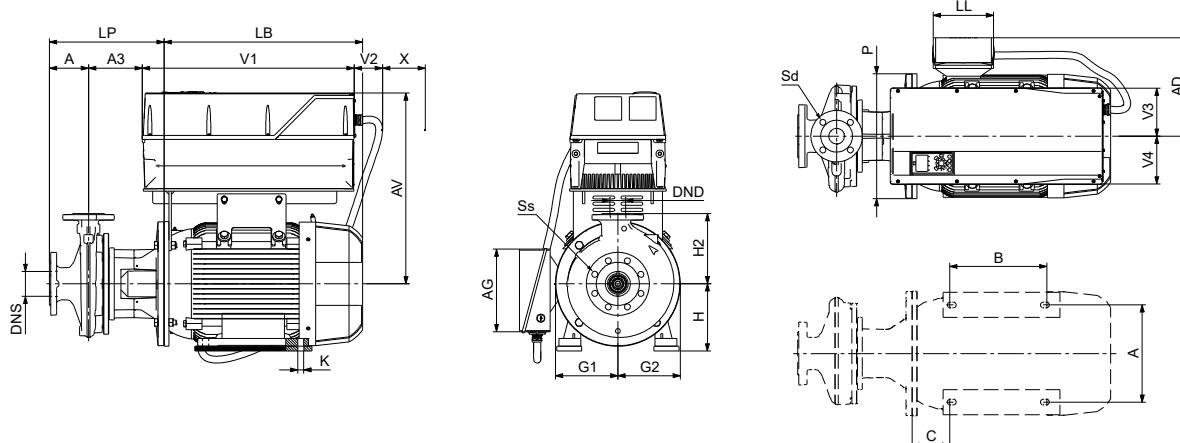
Dimensional drawings and dimensions



Mounting design C2, with support blocks under the motor (Variant 1b in section Support blocks)



Mounting design B



Mounting design B, with support blocks under the motor (Variant 1a in section Support blocks)

NBGE (Siemens IE4 motor with integrated CUE) dimensions, in mm

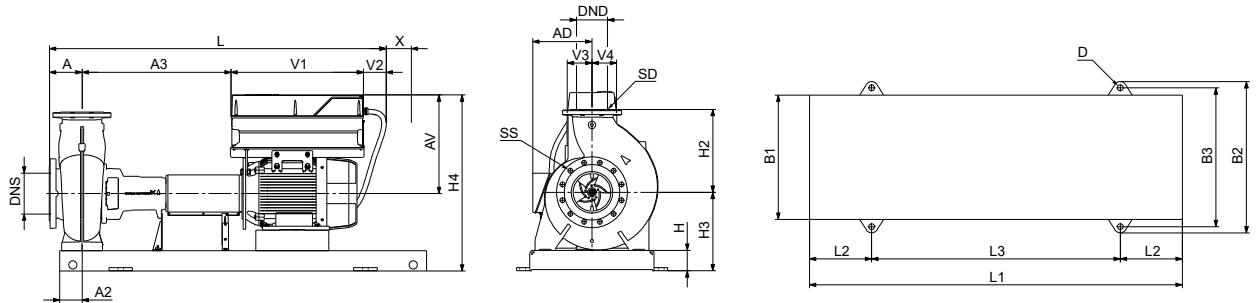
NBGE with Nidec IE5 motor has slight different dimensions and need to refer to GPC [NBGE](#) for details.

Pump size	Poles	P2 [kW]	Actual impeller size	Mounting design	AD	HC	LB	LL	V1	V2	V3	V4	AV	A3
65-40-250	2	30	260	B	315	200	611	197	650	200	126	126	565	169.5
		30	260	B	315	205	611	197	650	200	126	126	565	169.5
		30	298	C1	315	200	611	197	650	200	126	126	565	200
		30	298	C1	315	205	611	197	650	200	126	126	565	200
		37	318	C1	315	200	636	197	680	200	159	159	610	188
		37	318	C1	315	205	636	197	680	200	159	159	610	188
65-40-315	2	45	344	C1	338	225	708	197	680	200	159	159	625	239
		45	336	C1	338	230	708	197	680	200	159	159	625	239
		30	254	B	315	200	611	197	650	200	126	126	565	169.5
		30	254	B	315	205	611	197	650	200	126	126	565	169.5
		37	263	B	315	200	636	197	680	200	159	159	610	157.5
		37	263	B	315	205	636	197	680	200	159	159	610	157.5
80-50-250	2	30	267	C1	315	225	611	197	650	200	126	126	565	200
		37	285	C1	315	225	636	197	680	200	159	159	610	188
		45	300	C1	338	225	708	197	680	200	159	159	625	239
		45	300	C1	338	230	708	197	680	200	159	159	625	239
		55	321	C1	410	275	762	233	680	200	159	159	640	239
		55	321	C1	410	285	762	233	680	200	159	159	640	239
80-50-315	2	30	217	B	315	200	611	197	650	200	126	126	565	169.5
		30	217	B	315	205	611	197	650	200	126	126	565	169.5
		37	219	B	315	200	636	197	680	200	159	159	610	157.5
		37	219	B	315	205	636	197	680	200	159	159	610	157.5
		30	223	C1	315	200	611	197	650	200	126	126	565	200
		30	223	C1	315	205	611	197	650	200	126	126	565	200
100-65-200	2	37	238	C1	315	200	636	197	680	200	159	159	610	188
		37	238	C1	315	205	636	197	680	200	159	159	610	188
		37	238	C1	315	205	636	197	680	200	159	159	610	188
		45	251	C1	338	225	708	197	680	200	159	159	625	239
		45	251	C1	338	235	708	197	680	200	159	159	625	239
		55	269	C1	410	275	762	233	680	200	159	159	640	239
100-65-250	2	55	269	C1	410	300	762	233	680	200	159	159	640	239
		55	272	C1	410	275	762	233	680	200	159	159	640	237
		55	272	C1	410	285	762	233	680	200	159	159	640	237
		30	176	C1	315	200	611	197	650	200	126	126	565	170
		30	176	C1	315	205	611	197	650	200	126	126	565	170
		30	170	C1	315	200	611	197	650	200	126	126	565	200
125-100-200	2	30	170	C1	315	205	611	197	650	200	126	126	565	200
		37	181	C1	315	200	636	197	680	200	159	159	610	188
		37	181	C1	315	205	636	197	680	200	159	159	610	188
		45	192	C1	338	225	708	197	680	200	159	159	625	239
		45	192	C1	338	235	708	197	680	200	159	159	625	239
		55	203	C1	410	275	762	233	680	200	159	159	640	239
125-100-250	2	55	203	C1	410	300	762	233	680	200	159	159	640	239
		30	255	C1	315	225	611	197	650	200	126	126	565	198
		37	275	C1	315	225	636	197	680	200	159	159	610	186
		55	205	C1	410	275	762	233	680	200	159	159	640	237
		55	205	C1	410	285	762	233	680	200	159	159	640	237
		18.5	295	C1	190	260	558	165	650	200	126	126	486	198
125-100-315	4	22	312	C1	286	260	588	165	650	s	126	126	486	198
		30	334	C1	315	250	636	165	650	200	126	126	565	198
		30	334	C1	315	260	636	165	650	200	126	126	565	198

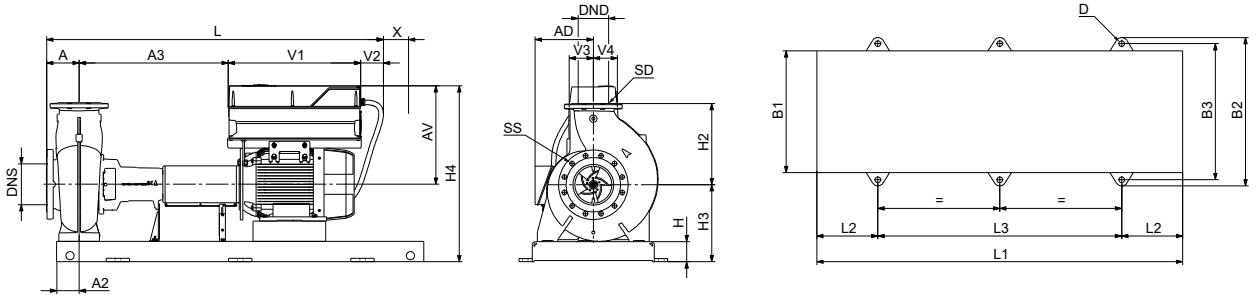
Pump size	Poles	P2 [kW]	Actual impeller size	Mounting design	AD	HC	LB	LL	V1	V2	V3	V4	AV	A3
125-100-400	4	22	334	C1	286	280	588	165	650	200	126	126	486	198
		30	360	C1	315	280	636	165	650	200	126	126	565	198
		30	360	C1	315	300	636	165	650	200	126	126	565	198
		37	375	C1	338	280	710	197	680	200	159	159	625	237
		37	375	C1	338	285	710	197	680	200	159	159	625	237
		45	395	C1	338	280	790	197	680	200	159	159	625	237
125-80-160	2	55	415	C1	410	280	817	197	680	200	159	159	640	237
		30	177	B	315	200	611	197	650	200	126	126	565	170
		30	177	B	315	205	611	197	650	200	126	126	565	170
125-80-200	2	30	188	C1	315	200	611	197	650	200	126	126	565	200
		30	188	C1	315	205	611	197	650	200	126	126	565	200
		37	200	C1	315	200	636	197	680	200	159	159	610	188
		37	200	C1	315	205	636	197	680	200	159	159	610	188
		45	211	C1	338	225	708	197	680	200	159	159	625	239
		45	211	C1	338	230	708	197	680	200	159	159	625	239
		55	222	C1	410	275	762	233	680	200	159	159	640	239
		55	222	C1	410	280	762	233	680	200	159	159	640	239
125-80-250	2	45	220	C1	338	225	708	197	680	200	159	159	625	239
		45	220	C1	338	230	708	197	680	200	159	159	625	239
		55	234	C1	410	275	762	233	680	200	159	159	640	239
		55	234	C1	410	285	762	233	680	200	159	159	640	239
125-80-315	4	18.5	320	C1	190	260	558	165	650	200	126	126	486	198
		22	334	C1	286	260	588	165	650	200	126	126	486	198
		18.5	347	C1	190	280	558	165	650	200	126	126	486	198
		22	365	C1	286	280	588	165	650	200	126	126	486	198
125-80-400	4	30	397	C1	315	280	636	165	650	200	126	126	565	198
		30	397	C1	315	300	636	165	650	200	126	126	565	198
		37	419	C1	338	280	710	197	680	200	159	159	625	237
		37	419	C1	338	285	710	197	680	200	159	159	625	237
150-125-200	2	45	438	C1	338	280	790	197	680	200	159	159	625	237
		45	176-154	C1	338	250	708	197	680	200	159	159	625	239
		55	196-166	C1	410	275	762	233	680	200	159	159	640	239
		55	196-166	C1	410	285	762	233	680	200	159	159	640	239
150-125-250	4	18.5	249	C1	190	260	558	165	650	200	126	126	486	198
		22	262	C1	286	260	588	165	650	200	126	126	486	198
		30	269	C1	315	250	636	165	650	200	126	126	565	198
		30	269	C1	315	260	636	165	650	200	126	126	565	198
150-125-315	4	18.5	275	C1	190	280	558	165	650	200	126	126	486	198
		22	290	C1	286	280	588	165	650	200	126	126	486	198
		30	317	C1	315	280	636	165	650	200	126	126	565	198
		30	317	C1	315	300	636	165	650	200	126	126	565	198
150-125-400	4	37	336	C1	338	280	710	197	680	200	159	159	625	237
		37	336	C1	338	285	710	197	680	200	159	159	625	237
		45	338	C1	338	280	790	197	680	200	159	159	625	237
		37	345	C1	338	315	710	197	680	200	159	159	625	237
150-125-500	4	37	345	C1	338	325	710	197	680	200	159	159	625	237
		45	368	C1	338	315	790	197	680	200	159	159	625	237
		45	368	C1	338	325	790	197	680	200	159	159	625	237
150-125-500	4	55	406	C1	410	400	817	197	680	200	159	159	640	275

Pump size	Poles	P2 [kW]	Actual impeller size	Mounting design	AD	HC	LB	LL	V1	V2	V3	V4	AV	A3
200-150-250	4	18.5	230	C1	190	280	558	165	650	200	126	126	486	198
		22	242	C1	286	280	588	165	650	200	126	126	486	198
		30	262	C1	315	280	636	165	650	200	126	126	565	198
		30	262	C1	315	300	636	165	650	200	126	126	565	198
		37	275	C1	338	280	710	197	680	200	159	159	625	237
		37	275	C1	338	285	710	197	680	200	159	159	625	237
		45	282	C1	338	280	790	197	680	200	159	159	625	237
		37	275	C1	338	315	710	197	680	200	159	159	625	250
200-150-315	4	37	275	C1	338	325	710	197	680	200	159	159	625	250
		45	291	C1	338	315	790	197	680	200	159	159	625	250
		45	291	C1	338	325	790	197	680	200	159	159	625	250
		55	310	C1	410	315	817	197	680	200	159	159	640	250
200-150-315.2	4	22	250	C1	286	320	588	165	650	200	126	126	486	211
		30	275	C1	315	315	636	165	650	200	126	126	565	211
		30	275	C1	315	320	636	165	650	200	126	126	565	211
		37	294	C1	338	315	710	197	680	200	159	159	625	250
		37	294	C1	338	325	710	197	680	200	159	159	625	250
		45	314	C1	338	315	790	197	680	200	159	159	625	250
		45	314	C1	338	325	790	197	680	200	159	159	625	250
		55	334	C1	410	315	817	197	680	200	159	159	640	250
200-150-400	4	55	343	C1	410	315	817	197	680	200	159	159	640	250
250-200-400	4	37	280	C2	338	400	710	197	680	200	159	159	625	270
		45	296	C2	338	400	790	197	680	200	159	159	625	270
		55	312	C2	410	400	817	197	680	200	159	159	640	270
300-250-350	4	37	266	C2	338	450	710	197	680	200	159	159	625	309
		45	294	C2	338	450	790	197	680	200	159	159	625	309
		55	318	C2	410	450	817	197	680	200	159	159	640	309
300-250-400	4	45	281	C2	338	450	790	197	680	200	159	159	625	284
		55	301	C2	410	450	817	197	680	200	159	159	640	284

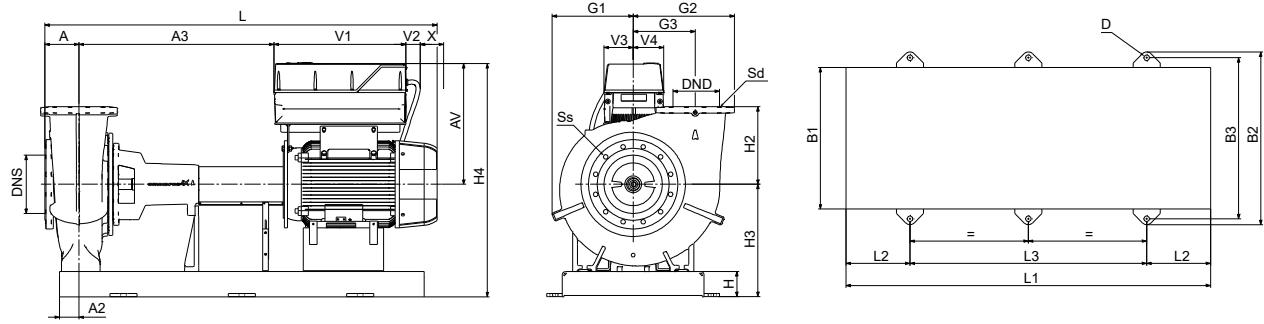
NKGE (Siemens motor with integrated CUE), dimensional drawings



EN/ISO base frame with 4 mounting holes



EN/ISO base frame with 6 mounting holes



EN/ISO base frame with 6 mounting holes, tangential outlet

NKGE (Siemens IE4 motor with integrated CUE) dimensions, in mm

NKGE with Nidec IE5 motor has slight different dimensions and need to refer to GPC [NKGE](#) for details.

Pump size	Poles	P2 [kW]	Actual impeller size	H4	L ⁽⁴⁶⁾	AD	V1	V2	V3	V4	AV	A3
65-40-250	2	30	260	870	1387.5/1483.5	315	650	200	126	126	565	437.5/533.5
		30	298	870	1412/1508	315	650	200	126	126	565	437/533
		37	318	915	1430/1526	315	680	200	159	159	610	425/521
		45	336	955	1452/1548	338	680	200	159	159	625	447/543
80-50-250	2	45	344	955	1452/1548	338	680	200	159	159	625	447/543
		30	254	870	1412.5/1508.5	315	650	200	126	126	565	437.5/533.5
		37	263	915	1430.5/1526.5	315	680	200	159	159	610	425.5/521.5
		30	267	890	1412/1508	315	650	200	126	126	565	437/533
80-50-315	2	37	285	935	1430/1526	315	680	200	159	159	610	425/521
		45	300	955	1452/1548	338	680	200	159	159	625	447/543
		55	321	995	1454/1550	410	680	200	159	159	640	449/545
		30	217	870	1387.5/1523.5	315	650	200	126	126	565	437.5/573.5
100-65-200	2	37	219	915	1405.5/1541.5	315	680	200	159	159	610	425.5/561.5
		30	223	870	1412/1548	315	650	200	126	126	565	437/573
		37	238	915	1430/1566	315	680	200	159	159	610	425/561
		45	251	955	1452/1588	338	680	200	159	159	625	447/583
100-65-250	2	55	269	1000	1454/1590	410	680	200	159	159	640	449/585
		30	217	870	1387.5/1523.5	315	650	200	126	126	565	437.5/573.5
		37	219	915	1405.5/1541.5	315	680	200	159	159	610	425.5/561.5
		30	223	870	1412/1548	315	650	200	126	126	565	437/573
125-80-200	2	37	238	915	1430/1566	315	680	200	159	159	610	425/561
		45	251	955	1452/1588	338	680	200	159	159	625	447/583
		55	269	1000	1454/1590	410	680	200	159	159	640	449/585
		55	272	995	1484/1620	410	680	200	159	159	640	479/615
125-80-160	2	30	177	870	1413/1549	315	650	200	126	126	565	438/574
		30	188	870	1412/1548	315	650	200	126	126	565	437/573
		37	200	915	1430/1566	315	680	200	159	159	610	425/561
		45	211	955	1452/1588	338	680	200	159	159	625	447/583
125-80-250	2	45	222	995	1454/1590	410	680	200	159	159	640	449/585
		45	220	955	1452/1588	338	680	200	159	159	625	447/583
		55	234	995	1454/1590	410	680	200	159	159	640	449/585
		55	234	836	1537/1673	286	650	200	126	126	486	562/698
125-80-315	4	18.5	320	836	1537/1673	190	650	200	126	126	486	562/698
		22	334	836	1537/1673	286	650	200	126	126	486	562/698
		18.5	347	869	1537/1673	190	650	200	126	126	486	562/698
		22	365	869	1537/1673	286	650	200	126	126	486	562/698
125-80-400	4	30	397	945	1442/1578	315	650	200	126	126	565	467/603
		37	419	1005	1482/1618	338	680	200	159	159	625	477/613
		45	438	1005	1482/1618	338	680	200	159	159	625	477/613
		45	438	945	1482/1618	338	680	200	159	159	625	477/613
125-100-160	2	30	176	870	1413/1549	315	650	200	126	126	565	438/574
		30	170	870	1412/1548	315	650	200	126	126	565	437/573
		37	181	915	1430/1566	315	680	200	159	159	610	425/561
		45	192	955	1452/1588	338	680	200	159	159	625	447/583
125-100-200	2	55	203	1000	1454/1590	410	680	200	159	159	640	449/585
		30	255	890	1457/1593	315	650	200	126	126	565	467/603
		37	275	935	1475/1611	315	680	200	159	159	610	455/591
		55	205	995	1499/1635	410	680	200	159	159	640	479/615
125-100-250	2	18.5	295	836	1552/1688	190	650	200	126	126	486	562/698
		22	312	836	1552/1688	286	650	200	126	126	486	562/698
		30	334	920	1457/1593	315	650	200	126	126	565	467/603
		22	334	869	1552/1688	286	650	200	126	126	486	562/698
125-100-315	4	30	360	945	1457/1593	315	650	200	126	126	565	467/603
		37	375	1005	1497/1633	338	680	200	159	159	625	477/613
		45	395	1005	1497/1633	338	680	200	159	159	625	477/613
		55	415	1020	1499/1635	410	680	200	159	159	640	479/615
150-125-200	2	45	176-154	975	1467/1603	338	680	200	159	159	625	447/583
		55	196-166	995	1469/1605	410	680	200	159	159	640	449/585

Pump size	Poles	P2 [kW]	Actual impeller size	H4	L ⁴⁶⁾	AD	V1	V2	V3	V4	AV	A3
150-125-250	4	18.5	249	836	1552/1688	190	650	200	126	126	486	562/698
		22	262	836	1552/1688	286	650	200	126	126	486	562/698
		30	269	920	1457/1593	315	650	200	126	126	565	467/603
150-125-315	4	18.5	275	869	1552/1688	190	650	200	126	126	486	562/698
		22	290	869	1552/1688	286	650	200	126	126	486	562/698
		30	317	945	1457/1593	315	650	200	126	126	565	467/603
150-125-400	4	37	336	1005	1497/1633	338	680	200	159	159	625	477/613
		45	338	1005	1497/1633	338	680	200	159	159	625	477/613
		37	345	1040	1497/1633	338	680	200	159	159	625	477/613
150-125-500	4	45	368	1040	1497/1633	338	680	200	159	159	625	477/613
		55	392	1055	1499/1635	410	680	200	159	159	640	479/615
150-125-500	4	55	406	1170	1679/1855	410	680	200	159	159	640	619/795
		18.5	230	869	1572/1708	190	650	200	126	126	486	562/698
		22	242	869	1572/1748	286	650	200	126	126	486	562/738
200-150-250	4	30	262	945	1477/1653	315	650	200	126	126	565	467/643
		37	275	1005	1517/1693	338	680	200	159	159	625	477/653
		45	282	1005	1517/1693	338	680	200	159	159	625	477/653
200-150-315	4	37	275	1040	1654/1830	338	680	200	159	159	625	614/790
		45	291	1040	1654/1830	338	680	200	159	159	625	614/790
		55	310	1055	1656/1832	410	680	200	159	159	640	616/792
200-150-315.2	4	22	250	901	1709/1885	286	650	200	126	126	486	699/875
		30	275	980	1614/1790	315	650	200	126	126	565	604/780
		37	294	1040	1654/1830	338	680	200	159	159	625	614/790
200-150-400	4	45	314	1040	1654/1830	338	680	200	159	159	625	614/790
		55	334	1055	1656/1832	410	680	200	159	159	640	616/792
		55	343	1055	1656/1832	410	680	200	159	159	640	616/792
250-200-400	4	37	280	1155	1694/1870	338	680	200	159	159	625	644/820
		45	296	1155	1694/1870	338	680	200	159	159	625	644/820
		55	312	1170	1696/1872	410	680	200	159	159	640	646/82
300-250-350	4	37	266	1205	1761/1937	338	680	200	159	159	625	706/882
		45	294	1205	1761/1937	338	680	200	159	159	625	706/882
		55	318	1220	1763/1939	410	680	200	159	159	640	708/884
300-250-400	4	45	281	1205	1736/1912	338	680	200	159	159	625	696/872
		55	301	1220	1738/1914	410	680	200	159	159	640	698/874

⁴⁶⁾Pump with standard coupling / pump with spacer coupling.

Related information

[Support blocks](#)

[Key to support block number](#)

18. Minimum efficiency index

Minimum efficiency index (MEI) means the dimensionless scale unit for hydraulic pump efficiency at best efficiency point (BEP), part load (PL) and overload (OL). The Commission Regulation (EU) sets efficiency requirements to MEI greater than or equal to 0.10 as from 1 January 2013 and MEI greater than or equal to 0.40 as from 1 January 2015. An indicative benchmark for best-performing water pump available on the market as from 1 January 2013 is determined in the Regulation.

- The benchmark for most efficient water pumps is MEI greater than or equal to 0.70.
- The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller adapts the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter.
- The operation of this water pump with variable duty points may be more efficient and economic when controlled, for example by using a variable-speed drive that matches the pump duty to the system.

Information on benchmark efficiency is available at <http://europump.eu/efficiencycharts>.

2-pole		
Pump size	NBG MEI	NKG MEI
50-32-125.1/140	0.70	0.70
50-32-125/142	0.70	0.70
50-32-160.1/177	0.70	0.70
50-32-160/177	0.59	0.52
50-32-200.1/207	0.58	0.52
50-32-200/219	0.62	0.55
50-32-250/262	0.70	0.65
65-40-200/219	0.65	0.59
65-40-250/260	0.70	0.70
65-40-315/344	0.70	0.70
65-50-125/142	0.70	0.70
65-50-160/177	0.70	0.70
80-50-200/219	0.70	0.70
80-50-250/263	0.67	0.61
80-50-315/344	0.49	0.43
80-65-125/144	0.64	0.58
80-65-160/177	0.70	0.70
100-65-200/219	0.70	0.70
100-65-250/270	0.57	0.51
100-65-315/320	0.70	0.65
100-80-125/144	0.70	0.66
100-80-160/177	0.70	0.70
125-80-160/177	0.70	0.70
125-80-200/222	0.70	0.65
125-80-250/270	0.70	0.70
125-80-315/334	0.69	0.63
125-80-400/410	0.56	0.49
125-80-400.1/400	0.45	0.39
125-100-160/176	0.70	0.70
125-100-200/219	0.68	0.62
125-100-250/274	0.70	0.70
125-100-315/322	0.63	0.56
150-125-200/224	0.70	0.70
150-125-250/269	0.70	0.69
150-125-315/317	0.69	0.62
200-150-200/224	0.70	0.70
200-150-250/265	0.70	0.70
200-150-315.2/317	0.70	0.70
200-150-315/291	-	-

4-pole		
Pump size	NBG MEI	NKG MEI
50-32-125.1/140	0.70	0.70
50-32-125/142	0.70	0.70
50-32-160.1/177	0.60	0.55
50-32-160/173	0.65	0.60
50-32-200.1/207	0.70	0.70
50-32-200/219	0.69	0.64
50-32-250/262	0.70	0.70
65-40-200/219	0.70	0.70
65-40-250/260	0.70	0.70
65-40-315/344	0.64	0.60
65-50-125/142	0.70	0.70
65-50-160/177	0.70	0.70
80-50-200/219	0.70	0.70
80-50-250/263	0.70	0.70
80-50-315/344	0.70	0.70
80-65-125/144	0.66	0.62
80-65-160/177	0.70	0.70
100-65-200/219	0.70	0.70
100-65-250/270	0.70	0.67
100-65-315/320	0.70	0.70
100-80-125/144	0.70	0.70
100-80-160/177	0.70	0.70
125-80-160/177	0.70	0.70
125-80-200/222	0.70	0.70
125-80-250/270	0.70	0.70
125-80-315/334	0.70	0.70
125-80-400/438	0.44	0.41
125-100-160/176	0.70	0.70
125-100-200/219	0.65	0.61
125-100-250/274	0.70	0.70
125-100-315/334	0.70	0.70
125-100-400/415	0.70	0.70
150-125-200/226	0.70	0.70
150-125-250/269	0.62	0.57
150-125-315/338	0.68	0.63
150-125-400/438	0.55	0.50
150-125-500/548	0.50	0.46
200-150-200/224	0.70	0.70
200-150-250/282	0.67	0.62
200-150-315.2/342	0.68	0.63
200-150-315/338	0.53	0.48
200-150-400/438	0.70	0.70
200-150-500/548	0.62	0.58
250-200-400/404	0.58	0.52
250-200-450/455	0.44	0.40
300-250-350/370	0.70	0.70
300-250-400/405	0.50	0.46
300-250-450/445	0.70	0.68
300-250-500/525	0.48	0.45
350-300-305/350	0.70	0.70

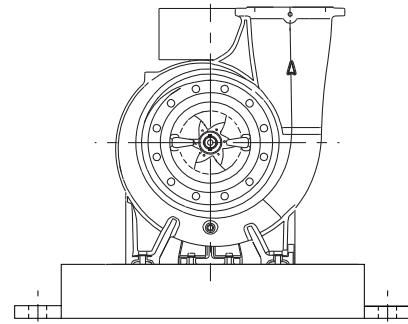
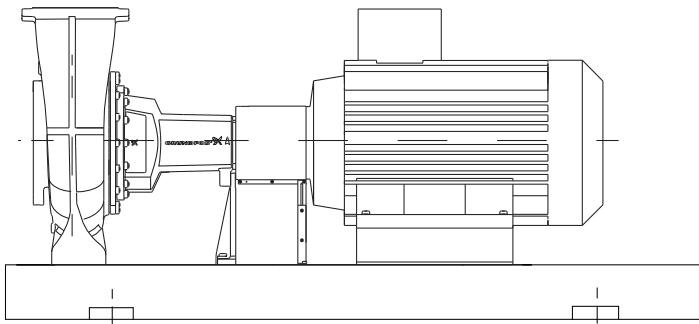
6-pole		
Pump size	NBG MEI	NKG MEI
125-100-160/176	0.70	0.70
125-100-200/219	0.70	0.65
125-100-250/274	0.70	0.70
125-100-315/334	0.70	0.70
125-100-400/415	0.70	0.70
150-125-200/226	0.70	0.70
150-125-250/269	0.70	0.68
150-125-315/338	0.70	0.70
150-125-400/438	0.56	0.51
150-125-500/548	0.50	0.46
200-150-200/224	0.70	0.70
200-150-250/282	0.70	0.67
200-150-315.2/342	0.70	0.65
200-150-315/338	0.60	0.54
200-150-400/438	0.70	0.70
200-150-500/548	0.66	0.61
250-200-400/404	0.70	0.69
250-200-450/451	0.45	0.42
300-250-350/366	0.70	0.70
300-250-400/401	0.46	0.42
300-250-450/433	0.69	0.64
300-250-500/525	0.48	0.45
350-300-305/350	0.70	0.70

8-pole		
Pump size	NBG MEI	NKG MEI
350-300-305/350	0.70	0.70

19. Base frames

NKG base frames


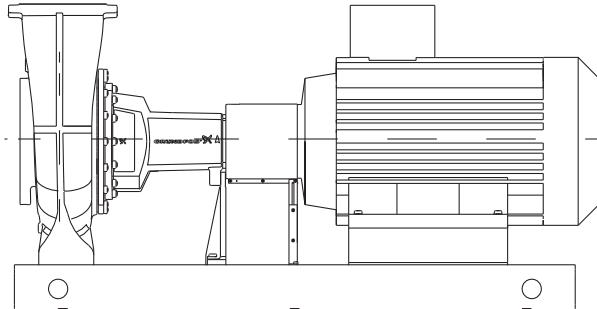
The EN/ISO base frame code is stated for each pump mentioned in section Dimension drawings and dimensions.



TM051513

NKG pump with EN/ISO base frame

The C-channel base frame code is stated for each pump mentioned in section NKG with C-channel base frames, dimensional sketches.



TM059293

NKG pump with C-channel base frame

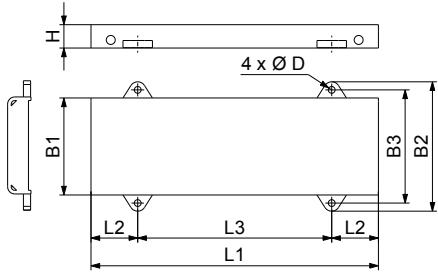
Related information

[NKG with C-channel base frames, dimensional sketches](#)

NKG with EN/ISO base frames, dimensional sketches

The EN/ISO base frame number is stated for each pump mentioned in section NKG, dimensional drawings.

EN/ISO base frame with 4 mounting holes

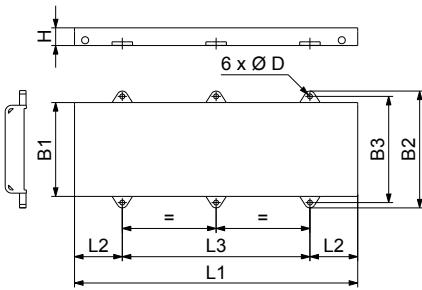


TM070506

EN/ISO base frame with 4 mounting holes

Base frame code	Dimensions [mm]							
	L1	L2	L3	B1	B2	B3	D	H
2	800	130	540	270	360	315	19	65
2 ST	704	130	444	270	360	315	19	65
3	900	150	600	300	390	345	19	65
3 ST	804	150	504	300	390	345	19	65
3B ST	804	150	504	300	390	345	19	65
4	1000	170	660	340	450	400	24	80
4B ST	929	170	589	340	450	400	24	80
5	1120	190	740	380	490	440	24	80
5 ST	978	190	598	380	490	440	24	80
5B ST	978	190	598	380	490	440	24	80
6	1250	205	840	430	540	490	24	80
6 ST	1143	205	733	430	540	490	24	80
6B ST	1175	205	765	430	540	490	24	80
7	1400	230	940	480	610	560	28	100
7 ST	1101	230	641	480	610	560	28	100
7B ST	1294	230	834	480	610	560	28	100

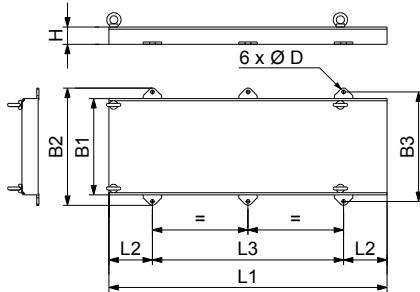
EN/ISO base frame with 6 mounting holes



TM070504

EN/ISO base frame with 6 mounting holes

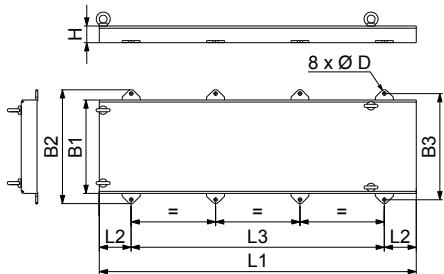
Base frame code	Dimensions [mm]							
	L1	L2	L3	B1	B2	B3	D	H
8	1600	270	1060	530	660	600	28	100
8 ST	1464	270	924	530	660	600	28	100
8B ST	1464	270	924	530	660	600	28	100
9	1800	300	1200	600	730	670	28	100
9 ST	1624	300	1024	600	730	670	28	100
9B ST	1624	300	1024	600	730	670	28	100
9C ST	1634	300	1024	600	730	670	28	100
10	2000	330	1340	730	890	830	28	130
10A ST	1824	330	1164	730	890	830	28	130
10B ST	1824	330	1164	730	890	830	28	130
10C ST	1824	330	1164	730	890	830	28	130



TM070505

EN/ISO base frame with lifting eyes and 6 mounting holes

Base frame code	Dimensions [mm]							
	L1	L2	L3	B1	B2	B3	D	H
10D	2110	330	1450	730	890	830	28	130
10E	1690	330	1030	730	890	830	28	130
10F	1880	330	1220	730	890	830	28	130
10G	2290	330	1630	730	890	830	28	130

EN/ISO base frame with 8 mounting holes

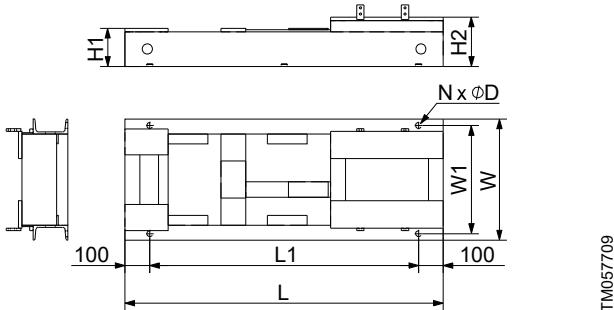
TM070507

EN/ISO base frame with 8 mounting holes

Base frame code	Dimensions [mm]							
	L1	L2	L3	B1	B2	B3	D	H
10H	2480	250	1980	730	890	830	28	130

NKG with C-channel base frames, dimensional sketches

Base frame code	Dimensions [mm]							
	L1	L2	L3	B1	B2	B3	D	H
10H	2480	250	1980	730	890	830	28	130

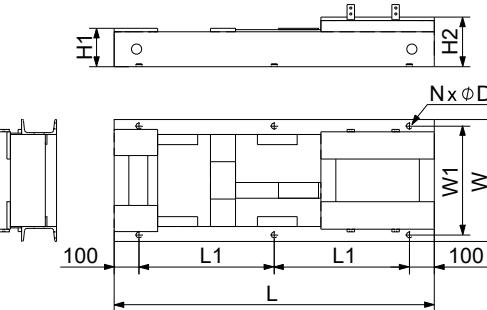
C-channel base frame with 4 mounting holes

TM057709

C-channel base frame with 4 mounting holes

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
1	645	445	330	295	73	134	4	14
1s	731	531	330	295	73	134	4	14
2	700	500	300	265	73	105	4	14
2s	796	596	300	265	73	105	4	14
3	685	485	400	365	77	177	4	14
3s	781	581	400	365	77	177	4	14
3As	800	600	400	365	77	197	4	14
4	805	605	400	365	77	177	4	14
4s	941	741	400	365	77	177	4	14
5	710	510	312	277	73	105	4	14
5s	806	606	312	277	73	105	4	14
6	730	530	400	365	77	167	4	14
6s	826	626	360	325	77	167	4	14
6As	850	650	400	365	77	167	4	14
7	840	640	400	365	77	167	4	14

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
7s	976	776	400	365	77	167	4	14
8	860	660	430	395	77	237	4	14
8s	996	796	430	395	77	237	4	14
9	750	550	346	303	110	142	4	19
9s	846	646	346	303	110	142	4	19
10	740	540	416	373	114	194	4	19
10s	876	676	416	373	114	194	4	19
11	900	700	416	373	114	194	4	19
12	920	720	446	403	114	239	4	19
13	910	710	596	553	116	296	4	19
14	765	565	346	303	114	134	4	19
14s	855	655	346	303	114	134	4	19
15	755	555	416	373	114	182	4	19
15s	885	685	416	373	114	182	4	19
16	900	700	446	403	114	182	4	19
17	930	730	456	413	114	227	4	19
18	920	720	596	553	116	284	4	19
19	850	650	341	298	114	114	4	19
19s	940	740	341	298	114	114	4	19
20	850	650	416	373	114	162	4	19
20s	980	780	416	373	114	162	4	19
21	980	780	447	404	114	162	4	19
31	970	770	386	343	138	110	4	19
32	990	790	416	373	114	134	4	19
110	860	660	400	365	77	187	4	14

C-channel base frame with 6 mounting holes

TM057710

C-channel base frame with 6 mounting holes

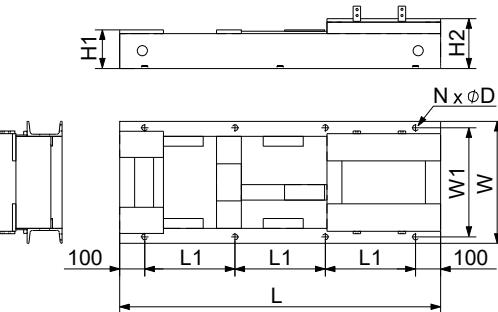
Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
11s	1036	418	416	373	114	194	6	19
12s	1030	415	446	403	114	239	6	19
12As	1050	425	446	403	114	239	6	19
13s	1020	410	596	553	116	296	6	19
13As	1080	440	596	553	116	296	6	19
16s	1036	418	446	403	114	182	6	19
17s	1030	415	456	413	114	227	6	19
17As	1060	430	456	413	114	227	6	19
18s	1096	448	596	553	116	284	6	19
21s	1116	458	447	404	114	162	6	19
21As	1030	415	406	363	110	178	6	19

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
22	1010	405	446	403	114	207	6	19
22s	1080	440	446	403	114	207	6	19
22As	1150	475	446	403	114	207	6	19
23	1030	415	591	548	116	264	6	19
23s	1180	490	591	548	116	264	6	19
23As	1210	505	546	503	116	264	6	19
24	1300	550	586	543	116	271	6	19
24s	1476	638	586	543	116	271	6	19
25	1315	557.5	636	593	116	356	6	19
25s	1491	645.5	636	593	116	356	6	19
26	1350	575	636	593	116	406	6	19
26s	1526	663	636	593	116	406	6	19
27	1140	470	446	403	114	134	6	19
27s	1270	535	446	403	114	134	6	19
28	1140	470	446	403	114	179	6	19
28s	1250	525	446	403	114	179	6	19
28As	1280	540	446	403	114	179	6	19
29	1160	480	586	543	116	236	6	19
29s	1336	568	586	543	116	236	6	19
30	1156	478	596	553	116	271	6	19
30s	1292	546	596	553	116	271	6	19
31s	1053	426.5	386	343	138	110	6	19
32s	1100	450	416	373	114	134	6	19
33	1012	406	440	388	154	154	6	24
33s	1126	463	440	388	154	154	6	24
34	1150	475	470	418	154	154	6	24
34s	1286	543	470	418	154	154	6	24
35	1180	490	489	437	154	199	6	24
35s	1285	542.5	489	437	154	199	6	24
35As	1315	557.5	489	437	154	199	6	24
36	1200	500	610	558	160	260	6	24
36s	1370	585	610	558	160	260	6	24
37	1200	500	620	568	156	291	6	24
37s	1336	568	620	568	156	291	6	24
38	1340	570	620	568	156	291	6	24
38s	1516	658	620	568	156	291	6	24
39	1365	582.5	670	618	156	376	6	24
39s	1541	670.5	670	618	156	376	6	24
40	1403	601.5	660	610	156	426	6	24
40s	1579	689.5	660	610	156	426	6	24
41	1110	455	470	418	170	150	6	24
41s	1220	510	470	418	170	150	6	24
42	1216	508	500	448	154	179	6	24
42s	1352	576	500	448	154	179	6	24
42As	1350	575	500	448	154	179	6	24
43	1240	520	610	558	156	236	6	24
43s	1420	610	610	558	156	236	6	24
44	1240	520	610	558	156	271	6	24
44s	1376	588	610	558	156	271	6	24
45	1380	590	610	558	156	271	6	24
45s	1556	678	610	558	156	271	6	24
46	1400	600	660	608	156	356	6	24
46s	1576	688	660	608	156	356	6	24
47	1438	619	660	608	156	406	6	24

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
47s	1614	707	660	608	156	406	6	24
48	1438	619	610	558	156	246	6	24
48s	1614	707	610	558	156	246	6	24
49	1460	630	660	608	156	331	6	24
49s	1636	718	660	608	156	331	6	24
50	1504	652	660	608	156	381	6	24
50s	1680	740	660	608	156	381	6	24
51	1230	515	520	468	197	152	6	24
51s	1366	583	520	468	197	152	6	24
52	1300	550	510	458	154	154	6	24
52s	1436	618	510	458	154	154	6	24
53	1310	555	610	558	160	215	6	24
53s	1486	643	610	558	160	215	6	24
54	1305	552.5	610	558	160	250	6	24
54s	1440	620	610	558	160	250	6	24
55	1120	460	520	468	197	152	6	24
55s	1240	520	520	468	197	152	6	24
56	1500	650	630	569	196	261	6	28
56s	1676	738	630	569	196	261	6	28
57	1530	665	680	619	196	346	6	28
57s	1706	753	680	619	196	346	6	28
58	1568	684	780	719	196	396	6	28
58s	1744	772	780	719	196	396	6	28
59	1330	565	596	535	266	196	6	28
59s	1466	633	596	535	266	196	6	28
60	1370	585	596	535	219	194	6	28
60s	1506	653	596	535	219	194	6	28
61	1390	595	644	583	196	226	6	28
61s	1566	683	644	583	196	226	6	28
62	1370	585	630	569	196	261	6	28
62s	1506	653	630	569	196	261	6	28
63	1230	515	596	535	264	194	6	28
63s	1336	568	596	535	264	194	6	28
64	1660	730	680	619	196	231	6	28
64s	1836	818	680	619	196	231	6	28
65	1660	730	690	629	196	316	6	28
65s	1836	818	690	629	196	316	6	28
66	1700	750	780	719	196	366	6	28
66s	1876	838	780	719	196	366	6	28
67	1520	660	660	599	196	231	6	28
67s	1656	728	660	599	196	231	6	28
68	1520	660	637	576	196	196	6	28
68s	1660	730	637	576	196	196	6	28
69	1460	630	647	586	251	196	6	28
69s	1596	698	647	586	251	196	6	28
70	1420	610	647	586	296	196	6	28
70s	1556	678	647	586	296	196	6	28
71	1370	585	637	576	196	196	6	28
71s	1506	653	637	576	196	196	6	28
72	1390	595	647	586	296	196	6	28
72s	1526	663	647	586	296	196	6	28
73	1380	590	650	589	251	196	6	28
73s	1516	658	650	589	251	196	6	28
74	1540	670	698	637	196	196	6	28

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
74s	1676	738	698	637	196	196	6	28
75	1600	700	700	639	231	196	6	28
75s	1776	788	700	639	231	196	6	28
76	1600	700	702	641	288	198	6	28
76s	1736	768	702	641	288	198	6	28
77	1440	620	702	641	333	198	6	28
77s	1576	688	702	641	333	198	6	28
78	1710	755	780	719	196	331	6	28
78s	1886	843	780	719	196	331	6	28
79	1700	750	690	629	196	281	6	28
79s	1876	838	690	629	196	281	6	28
80	1750	775	690	629	196	196	6	28
80s	1926	863	690	629	196	196	6	28
81	1688	744	690	629	231	196	6	28
81s	1830	815	690	629	231	196	6	28
82	1580	690	690	629	265	200	6	28
82s	1716	758	690	629	265	200	6	28
83	1900	850	780	719	196	331	6	28
84	1850	825	690	629	196	281	6	28
85	1830	815	690	629	196	196	6	28
86	1820	810	710	649	231	196	6	28
86s	1996	898	710	649	231	196	6	28
87	1800	800	710	649	265	200	6	28
87s	1936	868	710	649	265	200	6	28
90	1980	890	710	649	196	196	6	28
96	1800	800	750	689	235	200	6	28
96s	1976	888	750	689	235	200	6	28
97	1675	737.5	750	689	265	200	6	28
97s	1810	805	750	689	265	200	6	28
98	1900	850	790	729	196	331	6	28
99	1880	840	750	689	196	281	6	28
100	1860	830	750	689	200	200	6	28
101	1800	800	800	739	275	200	6	28
101s	1976	888	800	739	275	200	6	28
102	1790	795	800	739	305	200	6	28
102s	1926	863	800	739	305	200	6	28
104	1990	895	800	739	196	241	6	28
110s	996	398	400	365	77	187	6	14
111	1225	512.5	480	428	172	152	6	24
111s	1360	580	480	428	172	152	6	24
112	1170	485	591	548	116	299	6	19
112s	1346	573	591	548	116	299	6	19
113	1890	845	800	739	275	200	6	28
114	1030	415	591	548	116	299	6	19
114s	1166	483	591	548	116	299	6	19
115	1768	784	690	629	231	196	6	28
115s	1944	872	690	629	231	196	6	28
116	1920	860	710	649	231	196	6	28

C-channel base frame with 8 mounting holes

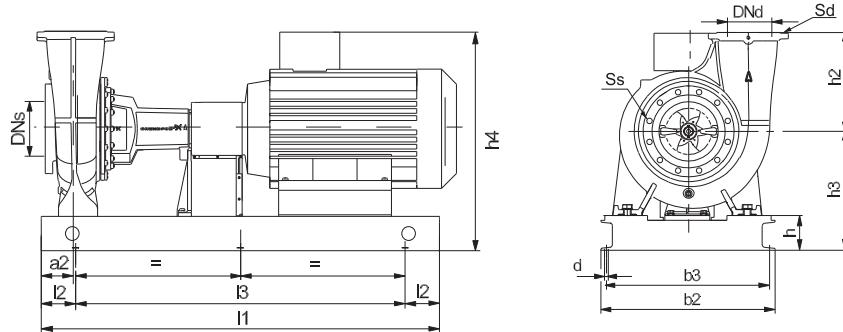


TM05771

C-channel base frame with 8 mounting holes

Base frame code	Dimensions [mm]							
	L	L1	W	W1	H1	H2	N	D
83s	2076	625	780	719	196	331	8	28
84s	2027	609	690	629	196	281	8	28
85s	2006	602	690	629	196	196	8	28
88	2015	605	790	729	196	331	8	28
88s	2192	664	790	729	196	331	8	28
89	2000	600	710	649	196	281	8	28
89s	2180	660	710	649	196	281	8	28
90s	2156	652	710	649	196	196	8	28
91	2120	640	710	649	235	200	8	28
91s	2300	700	710	649	235	200	8	28
92	2000	600	710	649	265	200	8	28
92s	2135	645	710	649	265	200	8	28
93	2210	670	790	729	196	331	8	28
93s	2390	730	790	729	196	331	8	28
94	2180	660	710	649	196	281	8	28
94s	2360	720	710	649	196	281	8	28
95	2150	650	710	649	200	200	8	28
95s	2330	710	710	649	200	200	8	28
98s	2075	625	790	729	196	331	8	28
99s	2060	620	750	689	196	281	8	28
100s	2036	612	750	689	200	200	8	28
103	2030	610	810	749	245	205	8	28
103s	2210	670	810	749	245	205	8	28
104s	2156	652	800	739	196	241	8	28
105	2024	608	800	739	196	291	8	28
105s	2204	668	800	739	196	291	8	28
106	2069	623	810	739	196	291	8	28
106s	2249	683	810	739	196	291	8	28
107	2264	688	810	739	196	291	8	28
107s	2444	748	810	739	196	291	8	28
108	2030	610	840	769	245	205	8	28
108s	2210	670	840	769	245	205	8	28
109	2099	633	840	779	196	291	8	28
109s	2279	693	840	779	196	291	8	28
113s	2066	622	800	739	275	200	8	28
116s	2105	635	710	649	231	196	8	28

NKG pump dimensions with C-channel base frames



TM057707

NKG pump with C-channel base frame

NKG pumps, 2-pole

Pump type	Motor data						Dimensions [mm]										Pump with E-motor ⁴⁸⁾	
	P2 [kW]	Frame size	Make			Base frame code ⁴⁷⁾	a2	l1 ⁴⁷⁾	l2	l3 ⁴⁷⁾	b2 ⁴⁷⁾	b3 ⁴⁷⁾	d	h	h3	h4 ⁴⁹⁾		
			MG	Siemens	MMG-E													
50-32-125.1	0.75	80A	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	185	294	
	1.1	80	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	185	294	
	1.5	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
	2.2	90L	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
50-32-125	1.1	80	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	185	294	
	1.5	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
	2.2	90L	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	242	362	
50-32-160.1	1.5	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315	
	2.2	90L	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	242	362	
	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	246	380	
50-32-160	2.2	90L	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	242	362	
	4	112M	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315	
	5.5	132S	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	246	380	
50-32-200.1	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	270	390	
	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	274	408	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	408	
	7.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	399	
50-32-200	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	274	408	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	408	
	7.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	399	
	11	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
50-32-250	5.5	132S	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	294	428	
	7.5	132S	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	294	419	
	11	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	15	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	

Pump type	Motor data						Dimensions [mm]									Pump with E-motor ⁴⁸⁾		
	P2 [kW]	Frame size	Make				Base frame code ⁴⁷⁾	a2	I1 ⁴⁷⁾	I2	I3 ⁴⁷⁾	b2 ⁴⁷⁾	b3 ⁴⁷⁾	d	h	h3	h4 ⁴⁹⁾	
			MG	Siemens	MMG-E	MMG-G												
65-40-200	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	408	
	7.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	399	
	11	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
	15	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
65-40-250	11	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	15	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	18.5	160L	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	334	494	
65-40-315	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	354	514	
	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
	37	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
65-50-125	45	225M	-	•	•	•	52/52s	75	1300/1436	100	1100/1236	510/510	458/458	24	154	379	704	
	1.5	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
	2.2	90L	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	195	305	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	242	362	
65-50-160	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	246	380	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	246	380	
	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	246	380	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	246	380	
80-50-200	7.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	246	371	
	11	160M	•	•	•	•	31/31s	60	970/1053	100	770/853	386/386	343/343	19	138	270	430	
	11	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
	15	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
80-50-250	18.5	160L	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	334	494	
	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
	37	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
80-50-315	30	200L	-	•	•	•	42/42s	75	1216/1352	100	1016/1152	500/500	448/448	24	154	379	684	
	37	200L	-	•	•	•	42/42s	75	1216/1352	100	1016/1152	500/500	448/448	24	154	379	684	
	45	225M	-	•	•	•	52/52s	75	1300/1436	100	1100/1236	510/510	458/458	24	154	379	704	
	55	250M	-	•	•	•	60/60s	75	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
80-65-125	75	280S	-	•	•	•	73/73s	75	1380/1516	100	1180/1316	650/650	589/589	28	251	476	908	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	242	362	
	4	112M	•	•	•	•	14/14s	60	765/855	100	565/655	346/346	303/303	19	114	246	380	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	246	380	
80-65-160	7.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	408	
	5.5	132S	•	•	•	•	19/19s	60	850/940	100	650/740	341/341	298/298	19	114	274	399	
	11	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
	15	160M	•	•	•	•	32/32s	60	990/1100	100	790/900	416/416	373/373	19	114	294	454	
100-65-200	11	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	15	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	18.5	160L	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	334	494	
80-65-200	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
	37	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	

Pump type	Motor data						Dimensions [mm]									Pump with E-motor ⁴⁸⁾		
	P2 [kW]	Frame size	Make				Base frame code ⁴⁷⁾	a2	l1 ⁴⁷⁾	l2	l3 ⁴⁷⁾	b2 ⁴⁷⁾	b3 ⁴⁷⁾	d	h	h3	h4 ⁴⁹⁾	
			MG	Siemens	MMG-E	MMG-G												
100-65-250	30	200L	-	•	•	•	111/111s	90	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
	37	200L	-	•	•	•	111/111s	90	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
	45	225M	-	•	•	•	52/52s	90	1300/1436	100	1100/1236	510/510	458/458	24	154	379	704	
	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
	75	280S	-	•	•	•	73/73s	90	1380/1516	100	1180/1316	650/650	589/589	28	251	476	908	
100-65-315	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
	75	280S	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	476	908	
	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	476	908	
	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	513	1008	
100-80-125	4	112M	•	•	•	•	14/14s	75	765/855	100	565/655	346/346	303/303	19	114	274	408	
	5.5	132S	•	•	•	•	19/19s	75	850/940	100	650/740	341/341	298/298	19	114	274	408	
	7.5	132S	•	•	•	•	19/19s	75	850/940	100	650/740	341/341	298/298	19	114	274	399	
100-80-160	11	160M	•	•	•	•	32/32s	75	990/1100	100	790/900	416/416	373/373	19	114	294	454	
	7.5	132S	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	294	419	
	11	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	15	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
125-80-160	18.5	160L	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	11	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	15	160M	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	18.5	160L	•	•	•	•	27/27s	75	1140/1270	100	940/1070	446/446	403/403	19	114	294	454	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	334	494	
125-80-200	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
	22	180M	•	•	•	•	34/34s	75	1150/1286	100	950/1086	470/470	418/418	24	154	334	494	
	30	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
	37	200L	-	•	•	•	111/111s	75	1225/1360	100	1025/1160	480/480	428/428	24	172	352	657	
125-80-250	45	225M	-	•	•	•	51/51s	75	1230/1366	100	1030/1166	520/520	468/468	24	197	377	702	
	55	250M	-	•	•	•	59/59s	75	1330/1466	100	1130/1266	596/596	535/535	28	266	446	838	
	45	225M	-	•	•	•	52/52s	90	1300/1436	100	1100/1236	510/510	458/458	24	154	379	704	
	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
125-80-315	75	280S	-	•	•	•	73/73s	90	1380/1516	100	1180/1316	650/650	589/589	28	251	476	908	
	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	476	908	
	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	501	933	
	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
125-80-400.1	132	315M	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
	160	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
	200	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
	132	315M	-	•	•	•	75/75s	90	1600/1776	100	1400/1576	700/700	639/639	28	231	511	1006	
125-80-400	160	315L	-	•	•	•	81/81s	90	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	200	315L	-	•	•	•	81/81s	90	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	250	315	-	•	•	•	-	96/96s	90	1800/1976	100	1600/1776	750/750	689/689	28	235	515	983
125-80-400	200	315L	-	•	•	•	115/115s	90	1768/1944	100	1568/1744	690/690	629/629	28	231	511	1006	
	250	315	-	•	•	•	-	96/96s	90	1800/1976	100	1600/1776	750/750	689/689	28	235	515	983
	315	315	-	•	•	•	-	96/96s	90	1800/1976	100	1600/1776	750/750	689/689	28	235	515	983
125-100-160	18.5	160L	•	•	•	•	27/27s	90	1140/1270	100	940/1070	446/446	403/403	19	114	314	474	
	22	180M	•	•	•	•	34/34s	90	1150/1286	100	950/1086	470/470	418/418	24	154	354	514	
	30	200L	-	•	•	•	111/111s	90	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	

Pump type	Motor data							Dimensions [mm]								Pump with E-motor ⁴⁸⁾		
	P2 [kW]	Frame size	Make				Base frame code ⁴⁷⁾	a2	I1 ⁴⁷⁾	I2	I3 ⁴⁷⁾	b2 ⁴⁷⁾	b3 ⁴⁷⁾	d	h	h3	h4 ⁴⁹⁾	
			MG	Siemens	MMG-E	MMG-G												
125-100-200	30	200L	-	•	•	•	111/111s	90	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
	37	200L	-	•	•	•	111/111s	90	1225/1360	100	1025/1160	480/480	428/428	24	172	372	677	
	45	225M	-	•	•	•	52/52s	90	1300/1436	100	1100/1236	510/510	458/458	24	154	379	704	
	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
	75	280S	-	•	•	•	73/73s	90	1380/1516	100	1180/1316	650/650	589/589	28	251	476	908	
125-100-250	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	444	836	
	75	280S	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	476	908	
	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	476	908	
	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	513	1008	
	132	315M	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	513	1008	
125-100-315	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
	132	315M	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
	160	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
	200	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
150-125-200	45	225M	-	•	•	•	52/52s	90	1300/1436	100	1100/1236	510/510	458/458	24	154	404	729	
	55	250M	-	•	•	•	60/60s	90	1370/1506	100	1170/1306	596/596	535/535	28	219	469	861	
	75	280S	-	•	•	•	73/73s	90	1380/1516	100	1180/1316	650/650	589/589	28	251	501	933	
	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	501	933	
	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
150-125-250	90	280M	-	•	•	•	69/69s	90	1460/1596	100	1260/1396	647/647	586/586	28	251	501	933	
	110	315S	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
	132	315M	-	•	•	•	76/76s	90	1600/1736	100	1400/1536	702/702	641/641	28	288	538	1033	
	160	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
	200	315L	-	•	•	•	82/82s	90	1580/1716	100	1380/1516	690/690	629/629	28	265	515	1010	
150-125-315	132	315M	-	•	•	•	75/75s	110	1600/1776	100	1400/1576	700/700	639/639	28	231	511	1006	
	160	315L	-	•	•	•	81/81s	110	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	200	315L	-	•	•	•	81/81s	110	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	250	315	-	•	•	•	-	96/96s	110	1800/1976	100	1600/1776	750/750	689/689	28	235	515	983
	75	280S	-	•	•	•	68/68s	110	1520/1660	100	1320/1460	637/637	576/576	28	196	476	908	
200-150-200	90	280M	-	•	•	•	68/68s	110	1520/1660	100	1320/1460	637/637	576/576	28	196	476	908	
	110	315S	-	•	•	•	75/75s	110	1600/1776	100	1400/1576	700/700	639/639	28	231	511	1006	
	132	315M	-	•	•	•	75/75s	110	1600/1776	100	1400/1576	700/700	639/639	28	231	511	1006	
200-150-250	160	315L	-	•	•	•	81/81s	110	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	200	315L	-	•	•	•	81/81s	110	1688/1830	100	1488/1630	690/690	629/629	28	231	511	1006	
	250	315	-	•	•	•	-	96/96s	110	1800/1976	100	1600/1776	750/750	689/689	28	235	515	983
	160	315L	-	•	•	•	85/85s	110	1830/2006	100	1630/1806	690/690	629/629	28	196	511	1006	
	200	315L	-	•	•	•	85/85s	110	1830/2006	100	1630/1806	690/690	629/629	28	196	511	1006	
200-150-315.2	250	315	-	•	•	•	-	100/100s	110	1860/2036	100	1660/1836	750/750	689/689	28	200	515	983
	315	315	-	•	•	•	-	100/100s	110	1860/2036	100	1660/1836	750/750	689/689	28	200	515	983
	355	355	-	•	•	•	-	108/108s	110	2030/2210	100	1830/2010	840/840	769/769	28	245	560	1101
	250	315	-	•	•	•	-	100/100s	110	1860/2036	100	1660/1836	750/750	689/689	28	200	515	983
200-150-315	315	315	-	•	•	•	-	100/100s	110	1860/2036	100	1660/1836	750/750	689/689	28	200	515	983
	355	355	-	•	•	•	-	108/108s	110	2030/2210	100	1830/2010	840/840	769/769	28	245	560	1101

(47) Pump with standard coupling / pump with spacer coupling.

(48) For pump dimensions with E-motors, see the relevant parts in section Dimensional drawings and technical data.

(49) P2 less than or equal to 22 kW, pump with MG motor; P2 greater than or equal to 30 kW, pump with Siemens motor.

Related information

NKG, dimensional drawings

NKG pumps, 4-pole

Pump type	Motor data						Dimensions [mm]										Pump with E-motor ⁵¹⁾	
	P2 [kW]	Frame size	Make				Base frame code ⁵⁰⁾	Dimensions [mm]										
			M	Siemens	MMG-E	MMG-G		a2	I1 ⁵⁰⁾	I2	I3 ⁵⁰⁾	b2 ⁵⁰⁾	b3 ⁵⁰⁾	d	h	h3	h4 ⁵²⁾	
50-32-125.1	0.25	71A	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
50-32-125	0.25	71A	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
50-32-160.1	0.25	71A	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.55	80A	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	205	314	
	0.25	71A	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
50-32-160	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.55	80A	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	205	314	
	0.75	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	325	
	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	233	342	
50-32-200.1	0.55	80A	•	•	•	•	3/3s	60	685/781	100	485/581	400/400	365/365	14	77	257	366	
	0.75	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	247	367	
	0.55	80A	•	•	•	•	3/3s	60	685/781	100	485/581	400/400	365/365	14	77	257	366	
50-32-200	0.75	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	247	367	
	1.1	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
	1.5	90L	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
	0.75	90S	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	377	
50-32-250	1.1	90S	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367	
	1.5	90L	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367	
	2.2	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414	
	0.75	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	247	367	
65-40-200	1.1	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
	1.5	90L	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
	2.2	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	270	390	
	1.5	90L	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367	
65-40-250	2.2	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414	
	3	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414	
	3	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	314	434	
65-40-315	4	112M	•	•	•	•	16/16s	75	900/1036	100	700/836	446/446	403/403	19	114	314	448	
	5.5	132S	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	314	439	
	7.5	132M	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	314	439	
	0.25	71A	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
65-50-125	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
	0.55	80A	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	185	294	
	0.37	71B	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314	
65-50-160	0.55	80A	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	205	314	
	0.75	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	325	
	1.1	90S	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315	
	1.1	90S	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
80-50-200	1.5	90L	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367	
	2.2	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	270	390	
	3	100L	•	•	•	•	9/9s	60	750/846	100	550/646	346/346	303/303	19	110	270	390	
	2.2	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414	
80-50-250	3	100L	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414	
	4	112M	•	•	•	•	16/16s	75	900/1036	100	700/836	446/446	403/403	19	114	294	428	

Pump type	Motor data					Dimensions [mm]										Pump with E-motor ⁵¹⁾						
	P2 [kW]	Frame size	Make			Base frame code ⁵⁰⁾	a2	I1 ⁵⁰⁾		I2		I3 ⁵⁰⁾		b2 ⁵⁰⁾		b3 ⁵⁰⁾		d	h	h3	h4 ⁵²⁾	
			MG	Siemens	MMG-E			I1 ⁵⁰⁾	I3 ⁵⁰⁾	b2 ⁵⁰⁾	b3 ⁵⁰⁾	d	h									
80-50-315	4	112M	•	•	•	•	•	17/17s	75	930/1030	100	730/830	456/456	413/413	19	114	339	473				
	5.5	132S	•	•	•	•	•	22/22s	75	1010/1080	100	810/880	446/446	403/403	19	114	339	464				
	7.5	132M	•	•	•	•	•	22/22s	75	1010/1080	100	810/880	446/446	403/403	19	114	339	464				
	11	160MB	•	•	•	•	•	28/28s	75	1140/1250	100	940/1050	446/446	403/403	19	114	339	499				
80-65-125	0.37	71B	•	•	•	•	•	1/1s	60	645/731	100	445/531	330/330	295/295	14	73	205	314				
	0.55	80A	•	•	•	•	•	2/2s	60	700/796	100	500/596	300/300	265/265	14	73	205	314				
	0.75	90S	•	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	325				
	1.1	90S	•	•	•	•	•	5/5s	60	710/806	100	510/606	312/312	277/277	14	73	205	315				
80-65-160	0.55	80A	•	•	•	•	•	3/3s	60	685/781	100	485/581	400/400	365/365	14	77	257	366				
	0.75	90S	•	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	247	367				
	1.1	90S	•	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367				
	1.5	90L	•	•	•	•	•	6/6s	60	730/826	100	530/626	400/360	365/325	14	77	257	367				
100-65-200	1.5	90L	•	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367				
	2.2	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	3	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	4	112M	•	•	•	•	•	16/16s	75	900/1036	100	700/836	446/446	403/403	19	114	294	428				
100-65-250	3	100L	•	•	•	•	•	11/11s	90	900/1036	100	700/836	416/416	373/373	19	114	314	434				
	4	112M	•	•	•	•	•	16/16s	90	900/1036	100	700/836	446/446	403/403	19	114	314	448				
	5.5	132S	•	•	•	•	•	21/21s	90	980/1116	100	780/916	447/447	404/404	19	114	314	439				
	7.5	132M	•	•	•	•	•	21/21s	90	980/1116	100	780/916	447/447	404/404	19	114	314	439				
100-65-315	5.5	132S	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	339	464				
	7.5	132M	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	339	464				
	11	160MA	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	339	499				
	15	160L	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	339	499				
100-80-125	0.55	80A	•	•	•	•	•	3/3s	75	685/781	100	485/581	400/400	365/365	14	77	257	366				
	0.75	90S	•	•	•	•	•	6/6s	75	730/826	100	530/626	400/360	365/325	14	77	247	367				
	1.1	90S	•	•	•	•	•	6/6s	75	730/826	100	530/626	400/360	365/325	14	77	257	367				
	0.75	90S	•	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	247	367				
100-80-160	1.1	90S	•	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367				
	1.5	90L	•	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367				
	2.2	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	2.2	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
125-80-160	1.5	90L	•	•	•	•	•	7/7s	75	840/976	100	640/776	400/400	365/365	14	77	257	367				
	2.2	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	3	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	4	112M	•	•	•	•	•	16/16s	75	900/1036	100	700/836	446/446	403/403	19	114	294	428				
125-80-200	2.2	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	3	100L	•	•	•	•	•	11/11s	75	900/1036	100	700/836	416/416	373/373	19	114	294	414				
	4	112M	•	•	•	•	•	16/16s	75	900/1036	100	700/836	446/446	403/403	19	114	294	428				
	5.5	132S	•	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	294	419				
125-80-250	7.5	132M	•	•	•	•	•	21/21s	75	980/1116	100	780/916	447/447	404/404	19	114	294	419				
	5.5	132S	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	339	464				
	7.5	132M	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	339	464				
	11	160MA	•	•	•	•	•	28/28As	90	1140/1250	100	940/1050	446/446	403/403	19	114	339	499				
125-80-315	11	160MA	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	364	524				
	15	160L	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	364	524				
	18.5	180M	-	•	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	404	711				
	22	180L	-	•	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	379	637				

Pump type	Motor data					Dimensions [mm]										Pump with E-motor ⁵¹⁾	
	P2 [kW]	Frame size	Make			Base frame code ⁵⁰⁾	a2	I1 ⁵⁰⁾	I2	I3 ⁵⁰⁾	b2 ⁵⁰⁾	b3 ⁵⁰⁾	d	h	h3	h4 ⁵²⁾	
			GM	Siemens	MMG-E												
125-80-400	18.5	180M	-	•	•	•	36/36s	90	1200/1370	100	1000/1170	610/610	558/558	24	160	440	747
	22	180L	-	•	•	•	36/36s	90	1200/1370	100	1000/1170	610/610	558/558	24	160	440	698
	30	200L	-	•	•	•	43/43s	90	1240/1420	100	1040/1220	610/610	558/558	24	156	436	741
	37	225S	-	•	•	•	53/53s	90	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
	45	225M	-	•	•	•	53/53s	90	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
125-100-160	2.2	100L	•	•	•	•	11/11s	90	900/1036	100	700/836	416/416	373/373	19	114	314	434
	3	100L	•	•	•	•	11/11s	90	900/1036	100	700/836	416/416	373/373	19	114	314	434
	4	112M	•	•	•	•	16/16s	90	900/1036	100	700/836	446/446	403/403	19	114	314	448
125-100-200	4	112M	•	•	•	•	16/16s	90	900/1036	100	700/836	446/446	403/403	19	114	314	448
	5.5	132S	•	•	•	•	21/21s	90	980/1116	100	780/916	447/447	404/404	19	114	314	439
	7.5	132M	•	•	•	•	21/21s	90	980/1116	100	780/916	447/447	404/404	19	114	314	439
	11	160MA	•	•	•	•	27/27s	90	1140/1270	100	940/1070	446/446	403/403	19	114	314	474
125-100-250	7.5	132M	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	339	464
	11	160MA	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	339	499
	15	160L	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	339	499
125-100-315	15	160L	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	364	524
	18.5	180M	-	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	404	711
	22	180L	-	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	404	662
	30	200L	-	•	•	•	42/42As	90	1216/1350	100	1016/1150	500/500	448/448	24	154	404	709
125-100-400	22	180L	-	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24	160	440	698
	30	200L	-	•	•	•	43/43s	110	1240/1420	100	1040/1220	610/610	558/558	24	156	436	741
	37	225S	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
	45	225M	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
	55	250M	-	•	•	•	61/61s	110	1390/1566	100	1190/1366	644/644	583/583	28	196	476	868
150-125-200	5.5	132S	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	364	489
	7.5	132M	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19	114	364	489
	11	160MA	•	•	•	•	28/28s	90	1140/1250	100	940/1050	446/446	403/403	19	114	364	524
150-125-250	15	160L	•	•	•	•	28/28s	90	1140/1250	100	940/1050	446/446	403/403	19	114	364	524
	11	160MA	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	364	524
	15	160L	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19	114	364	524
	18.5	180M	-	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	404	711
150-125-315	22	180L	-	•	•	•	35/35As	90	1180/1315	100	980/1115	489/489	437/437	24	154	404	662
	30	200L	-	•	•	•	42/42As	90	1216/1350	100	1016/1150	500/500	448/448	24	154	404	709
	37	225S	-	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24	160	440	747
150-125-400	22	180L	-	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24	160	440	698
	30	200L	-	•	•	•	43/43s	110	1240/1420	100	1040/1220	610/610	558/558	24	156	436	741
	37	225S	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
	45	225M	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765
	37	225S	-	•	•	•	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24	160	475	800
150-125-500	45	225M	-	•	•	•	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24	160	475	800
	55	250M	-	•	•	•	62/62s	110	1370/1506	100	1170/1306	630/630	569/569	28	196	511	903
	75	280S	-	•	•	•	67/67s	110	1520/1656	100	1320/1456	660/660	599/599	28	196	511	943
	90	280M	-	•	•	•	67/67s	110	1520/1656	100	1320/1456	660/660	599/599	28	196	511	943
	55	250M	-	•	•	•	57/57s	110	1530/1706	100	1330/1506	680/680	619/619	28	196	596	988
150-125-500	75	280S	-	•	•	•	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	90	280M	-	•	•	•	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	110	315S	-	•	•	•	79/79s	110	1700/1876	100	1500/1676	690/690	629/629	28	196	596	1091
	132	315M	-	•	•	•	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091
	160	315L	-	•	•	•	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091

Pump type	Motor data					Dimensions [mm]										Pump with E-motor ⁵¹⁾		
	P2 [kW]	Frame size	Make			Base frame code ⁵⁰⁾	a2	I1 ⁵⁰⁾	I2	I3 ⁵⁰⁾	b2 ⁵⁰⁾	b3 ⁵⁰⁾	d	h	h3	h4 ⁵²⁾		
			MG	Siemens	MMG-E													
200-150-200	7.5	132M	•	•	•	•	23/23s	110	1030/1180	100	830/980	591/591	548/548	19	116	396	521	
	11	160MA	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19	116	396	556	
	15	160L	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19	116	396	556	
200-150-250	15	160L	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19	116	396	593	
	18.5	180M	-	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24	160	440	698	
	22	180L	-	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24	160	440	698	
	30	200L	-	•	•	•	43/43s	110	1240/1420	100	1040/1220	610/610	558/558	24	156	436	741	
	37	225S	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765	
	45	225M	-	•	•	•	53/53s	110	1310/1486	100	1110/1286	610/610	558/558	24	160	440	765	
	22	180L	-	•	•	•	38/38s	110	1340/1516	100	1140/1316	620/620	568/568	24	156	471	729	
200-150-315.2	30	200L	-	•	•	•	45/45s	110	1380/1556	100	1180/1356	610/610	558/558	24	156	471	776	
	37	225S	-	•	•	•	48/48s	110	1438/1614	100	1238/1414	610/610	558/558	24	156	471	796	
	45	225M	-	•	•	•	48/48s	110	1438/1614	100	1238/1414	610/610	558/558	24	156	471	796	
	55	250M	-	•	•	•	56/56s	110	1500/1676	100	1300/1476	630/630	569/569	28	196	511	903	
	75	280S	-	•	•	•	67/67s	110	1520/1656	100	1320/1456	660/660	599/599	28	196	511	943	
	37	225S	-	•	•	•	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24	160	475	800	
	45	225M	-	•	•	•	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24	160	475	800	
200-150-315	55	250M	-	•	•	•	62/62s	110	1370/1506	100	1170/1306	630/630	569/569	28	196	511	903	
	75	280S	-	•	•	•	67/67s	110	1520/1656	100	1320/1456	660/660	599/599	28	196	511	943	
	90	280M	-	•	•	•	67/67s	110	1520/1656	100	1320/1456	660/660	599/599	28	196	511	943	
	55	250M	-	•	•	•	56/56s	110	1500/1676	100	1300/1476	630/630	569/569	28	196	511	903	
	75	280S	-	•	•	•	64/64s	110	1660/1836	100	1460/1636	680/680	619/619	28	196	511	943	
	90	280M	-	•	•	•	64/64s	110	1660/1836	100	1460/1636	680/680	619/619	28	196	511	943	
	110	315S	-	•	•	•	80/80s	110	1750/1926	100	1550/1726	690/690	629/629	28	196	511	1006	
200-150-400	132	315M	-	•	•	•	85/85s	110	1830/2006	100	1630/1806	690/690	629/629	28	196	511	1006	
	160	315L	-	•	•	•	85/85s	110	1830/2006	100	1630/1806	690/690	629/629	28	196	511	1006	
	132	315M	-	•	•	•	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091	
	160	315L	-	•	•	•	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091	
	200	315L	-	•	•	•	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091	
	250	315	-	•	•	•	-	99/99s	110	1880/2060	100	1680/1860	750/750	689/689	28	196	596	1064
	37	225S	-	•	•	•	-	49/49s	110	1460/1636	100	1260/1436	660/660	608/608	24	156	556	881
200-150-500	45	225M	-	•	•	•	-	49/49s	110	1460/1636	100	1260/1436	660/660	608/608	24	156	556	881
	55	250M	-	•	•	•	-	57/57s	110	1530/1706	100	1330/1506	680/680	619/619	28	196	596	988
	75	280S	-	•	•	•	-	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	90	280M	-	•	•	•	-	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	110	315S	-	•	•	•	-	79/79s	110	1700/1876	100	1500/1676	690/690	629/629	28	196	596	1091
	132	315M	-	•	•	•	-	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091
	75	280S	-	•	•	•	-	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
250-200-450	90	280M	-	•	•	•	-	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	110	315S	-	•	•	•	-	79/79s	110	1700/1876	100	1500/1676	690/690	629/629	28	196	596	1091
	132	315M	-	•	•	•	-	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091
	160	315L	-	•	•	•	-	84/84s	110	1850/2027	100	1650/1827	690/690	629/629	28	196	596	1091
	37	225S	-	•	•	•	-	50/50s	110	1504/1680	100	1304/1480	660/660	608/608	24	156	606	931
	45	225M	-	•	•	•	-	50/50s	110	1504/1680	100	1304/1480	660/660	608/608	24	156	606	931
	55	250M	-	•	•	•	-	58/58s	110	1568/1744	100	1368/1544	780/780	719/719	28	196	646	1038
300-250-350	75	280S	-	•	•	•	-	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
	90	280M	-	•	•	•	-	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078

Pump type	Motor data					Dimensions [mm]										Pump with E-motor ⁵¹⁾		
	P2 [kW]	Frame size	Make			Base frame code ⁵⁰⁾	a2	I1 ⁵⁰⁾	I2	I3 ⁵⁰⁾	b2 ⁵⁰⁾	b3 ⁵⁰⁾	d	h	h3	h4 ⁵²⁾		
			GM	Siemens	MMG-E													
300-250-400	45	225M	-	●	●	●	50/50s	110	1504/1680	100	1304/1480	660/660	608/608	24	156	606	931	
	55	250M	-	●	●	●	58/58s	110	1568/1744	100	1368/1544	780/780	719/719	28	196	646	1038	
	75	280S	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078	
	90	280M	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078	
	110	315S	-	●	●	●	78/78s	110	1710/1886	100	1510/1686	780/780	719/719	28	196	646	1141	
	132	315M	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
	160	315L	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
300-250-450	75	280S	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078	
	90	280M	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078	
	110	315S	-	●	●	●	78/78s	110	1710/1886	100	1510/1686	780/780	719/719	28	196	646	1141	
	132	315M	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
	160	315L	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
	200	315L	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
	160	315L	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
300-250-500	200	315L	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141	
	250	315	-	●	●	●	-	98/98s	110	1900/2075	100	1700/1875	790/790	729/729	28	196	646	1114
	315	315	-	●	●	●	-	98/98s	110	1900/2075	100	1700/1875	790/790	729/729	28	196	646	1114

50) Pump with standard coupling / pump with spacer coupling.

51) For pump dimensions with E-motors, see the relevant parts in section Dimensional drawings and technical data.

52) P2 less than or equal to 15 kW, pump with MG motor; P2 greater than or equal to 18.5 kW, pump with Siemens motor.

Related information

[NKG, dimensional drawings](#)

NKG pumps, 6-pole

Pump type	Motor data				Dimensions [mm]										Pump with E-motor ⁵⁴⁾		
	P2 [kW]	Frame size	Make			Base frame code ⁵³⁾	Dimensions [mm]					d	h	h3	h4 ⁵⁵⁾		
			MG	Siemens	MM/G-E		M	M	G	H							
125-100-160	0.55	80M	-	•	•	•	•	•	•	4/4s	90	805/941	100	605/741	400/400	365/365	14 77 277 397
	0.75	90S	-	•	•	•	•	•	•	110/110s	90	860/996	100	660/796	400/400	365/365	14 77 277 405
	1.1	90L	-	•	•	•	•	•	•	110/110s	90	860/996	100	660/796	400/400	365/365	14 77 277 405
125-100-200	1.1	90L	-	•	•	•	•	•	•	110/110s	90	860/996	100	660/796	400/400	365/365	14 77 277 405
	1.5	100L	-	•	•	•	•	•	•	11/11s	90	900/1036	100	700/836	416/416	373/373	19 114 314 449
	2.2	112M	-	•	•	•	•	•	•	16/16s	90	900/1036	100	700/836	446/446	403/403	19 114 314 462
125-100-250	3	132M	-	•	•	•	•	•	•	21/21s	90	980/1116	100	780/916	447/447	404/404	19 114 314 481
	2.2	112M	-	•	•	•	•	•	•	17/17As	90	930/1060	100	730/860	456/456	413/413	19 114 339 487
	3	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 339 506
125-100-315	4	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 339 506
	5.5	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 339 506
	4	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
125-100-315	5.5	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
	7.5	160M	-	•	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19 114 364 561
	11	160L	-	•	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19 114 364 561
125-100-400	7.5	160M	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593
	11	160L	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593
	15	180L	-	•	•	•	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24 160 440 698
150-125-200	1.5	100L	-	•	•	•	•	•	•	12/12s	90	920/1030	100	720/830	446/446	403/403	19 114 364 499
	2.2	112M	-	•	•	•	•	•	•	17/17s	90	930/1030	100	730/830	456/456	413/413	19 114 364 512
	3	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
150-125-250	4	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
	3	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
	4	132M	-	•	•	•	•	•	•	22/22As	90	1010/1150	100	810/950	446/446	403/403	19 114 364 531
150-125-315	5.5	132M	-	•	•	•	•	•	•	28/28As	90	1140/1280	100	940/1080	446/446	403/403	19 114 364 561
	5.5	132M	-	•	•	•	•	•	•	23/23s	110	1030/1180	100	830/980	591/591	548/548	19 116 396 563
	7.5	160M	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593
150-125-315	11	160L	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593
	15	180L	-	•	•	•	•	•	•	36/36s	110	1200/1370	100	1000/1170	610/610	558/558	24 160 440 698
	11	160L	-	•	•	•	•	•	•	30/30s	110	1156/1292	100	956/1092	596/596	553/553	19 116 431 628
150-125-400	15	180L	-	•	•	•	•	•	•	37/37s	110	1200/1336	100	1000/1136	620/620	568/568	24 156 471 729
	18.5	200L	-	•	•	•	•	•	•	44/44s	110	1240/1376	100	1040/1176	610/610	558/558	24 156 471 776
	22	200L	-	•	•	•	•	•	•	44/44s	110	1240/1376	100	1040/1176	610/610	558/558	24 156 471 776
150-125-500	30	225M	-	•	•	•	•	•	•	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24 160 475 800
	18.5	200L	-	•	•	•	•	•	•	46/46s	110	1400/1576	100	1200/1376	660/660	608/608	24 156 556 861
	22	200L	-	•	•	•	•	•	•	46/46s	110	1400/1576	100	1200/1376	660/660	608/608	24 156 556 861
150-125-500	30	225M	-	•	•	•	•	•	•	49/49s	110	1460/1636	100	1260/1436	660/660	608/608	24 156 556 881
	37	250M	-	•	•	•	•	•	•	57/57s	110	1530/1706	100	1330/1506	680/680	619/619	28 196 596 988
	45	280S	-	•	•	•	•	•	•	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28 196 596 1028
200-150-200	55	280M	-	•	•	•	•	•	•	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28 196 596 1028
	2.2	112M	-	•	•	•	•	•	•	18/18s	110	920/1096	100	720/896	596/596	553/553	19 116 396 544
	3	132M	-	•	•	•	•	•	•	23/23s	110	1030/1180	100	830/980	591/591	548/548	19 116 396 563
200-150-250	4	132M	-	•	•	•	•	•	•	23/23s	110	1030/1180	100	830/980	591/591	548/548	19 116 396 563
	5.5	132M	-	•	•	•	•	•	•	23/23As	110	1030/1210	100	830/1010	591/546	548/503	19 116 396 563
	7.5	160M	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593
200-150-250	11	160L	-	•	•	•	•	•	•	29/29s	110	1160/1336	100	960/1136	586/586	543/543	19 116 396 593

Pump type	Motor data					Dimensions [mm]										Pump with E-motor 54)	
	P2 [kW]	Frame size	Make			Base frame code ⁵³⁾	Dimensions [mm]										
			GM	Siemens	MMG-E		a2	I1 ⁵³⁾	I2	I3 ⁵³⁾	b2 ⁵³⁾	b3 ⁵³⁾	d	h	h3	h4 ⁵⁵⁾	
200-150-315.2	7.5	160M	-	●	●	●	24/24s	110	1300/1476	100	1100/1276	586/586	543/543	19	116	431	628
	11	160L	-	●	●	●	24/24s	110	1300/1476	100	1100/1276	586/586	543/543	19	116	431	628
	15	180L	-	●	●	●	38/38s	110	1340/1516	100	1140/1316	620/620	568/568	24	156	471	729
	18.5	200L	-	●	●	●	44/44s	110	1240/1376	100	1040/1176	610/610	558/558	24	156	471	776
200-150-315	11	160L	-	●	●	●	30/30s	110	1156/1292	100	956/1092	596/596	553/553	19	116	431	628
	15	180L	-	●	●	●	37/37s	110	1200/1336	100	1000/1136	620/620	568/568	24	156	471	729
	18.5	200L	-	●	●	●	44/44s	110	1240/1376	100	1040/1176	610/610	558/558	24	156	471	776
	22	200L	-	●	●	●	44/44s	110	1240/1376	100	1040/1176	610/610	558/558	24	156	471	776
200-150-400	30	225M	-	●	●	●	54/54s	110	1305/1440	100	1105/1240	610/610	558/558	24	160	475	800
	18.5	200L	-	●	●	●	45/45s	110	1380/1556	100	1180/1356	610/610	558/558	24	156	471	776
	22	200L	-	●	●	●	45/45s	110	1380/1556	100	1180/1356	610/610	558/558	24	156	471	776
	30	225M	-	●	●	●	48/48s	110	1438/1614	100	1238/1414	610/610	558/558	24	156	471	796
200-150-500	37	250M	-	●	●	●	56/56s	110	1500/1676	100	1300/1476	630/630	569/569	28	196	511	903
	45	280S	-	●	●	●	64/64s	110	1660/1836	100	1460/1636	680/680	619/619	28	196	511	943
	37	250M	-	●	●	●	57/57s	110	1530/1706	100	1330/1506	680/680	619/619	28	196	596	988
	45	280S	-	●	●	●	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
250-200-400	55	280M	-	●	●	●	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
	75	315S	-	●	●	●	79/79s	110	1700/1876	100	1500/1676	690/690	629/629	28	196	596	1091
	15	180L	-	●	●	●	39/39s	110	1365/1541	100	1165/1341	670/670	618/618	24	156	556	814
	18.5	200L	-	●	●	●	46/46s	110	1400/1576	100	1200/1376	660/660	608/608	24	156	556	861
250-200-450	22	200L	-	●	●	●	46/46s	110	1400/1576	100	1200/1376	660/660	608/608	24	156	556	861
	30	225M	-	●	●	●	49/49s	110	1460/1636	100	1260/1436	660/660	608/608	24	156	556	881
	37	250M	-	●	●	●	57/57s	110	1530/1706	100	1330/1506	680/680	619/619	28	196	596	988
	45	280S	-	●	●	●	65/65s	110	1660/1836	100	1460/1636	690/690	629/629	28	196	596	1028
300-250-350	11	160L	-	●	●	●	26/26s	110	1350/1526	100	1150/1326	636/636	593/593	19	116	566	763
	15	180L	-	●	●	●	40/40s	110	1403/1579	100	1203/1379	660/660	610/610	24	156	606	864
	18.5	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
	22	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
300-250-400	15	180L	-	●	●	●	40/40s	110	1403/1579	100	1203/1379	660/660	610/610	24	156	606	864
	18.5	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
	22	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
	30	225M	-	●	●	●	50/50s	110	1504/1680	100	1304/1480	660/660	608/608	24	156	606	931
300-250-450	37	250M	-	●	●	●	58/58s	110	1568/1744	100	1368/1544	780/780	719/719	28	196	646	1038
	45	280S	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
	18.5	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
	22	200L	-	●	●	●	47/47s	110	1438/1614	100	1238/1414	660/660	608/608	24	156	606	911
300-250-500	30	225M	-	●	●	●	50/50s	110	1504/1680	100	1304/1480	660/660	608/608	24	156	606	931
	37	250M	-	●	●	●	58/58s	110	1568/1744	100	1368/1544	780/780	719/719	28	196	646	1038
	45	280S	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
	55	280M	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
300-250-500	45	280S	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
	55	280M	-	●	●	●	66/66s	110	1700/1876	100	1500/1676	780/780	719/719	28	196	646	1078
	75	315S	-	●	●	●	78/78s	110	1710/1886	100	1510/1686	780/780	719/719	28	196	646	1141
	90	315M	-	●	●	●	83/83s	110	1900/2076	100	1700/1875	780/780	719/719	28	196	646	1141

53) Pump with standard coupling or pump with spacer coupling.

54) For pump dimensions with E-motors, see the relevant parts in section Dimensional drawings and technical data.


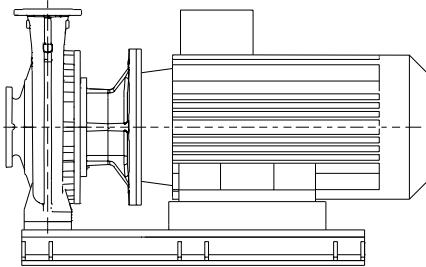
55) Pump with Siemens motor.

Related information

NKG, dimensional drawings

NBG base frames

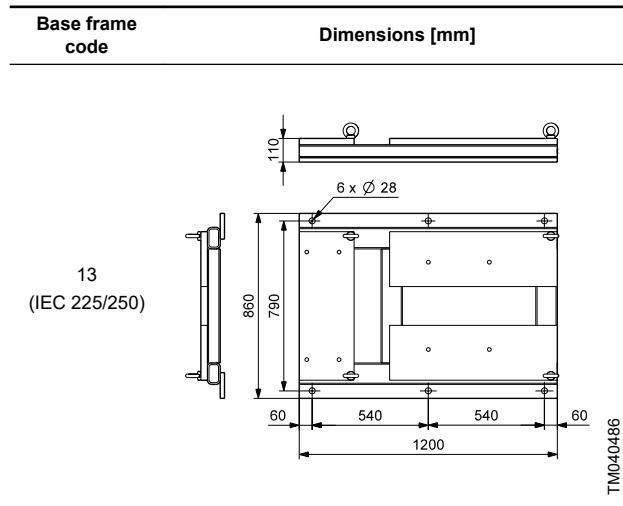
Some NBG pumps are available with base frame as an option. The pump is mounted on the base frame when produced, and therefore the base frame should be ordered together with the pump.






TM0515-4

NBG pump with base frame

NBG base frames, dimensional sketches

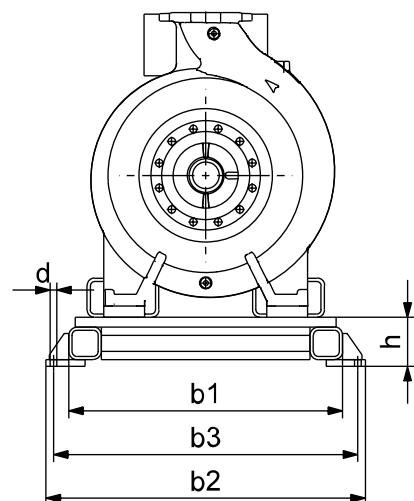
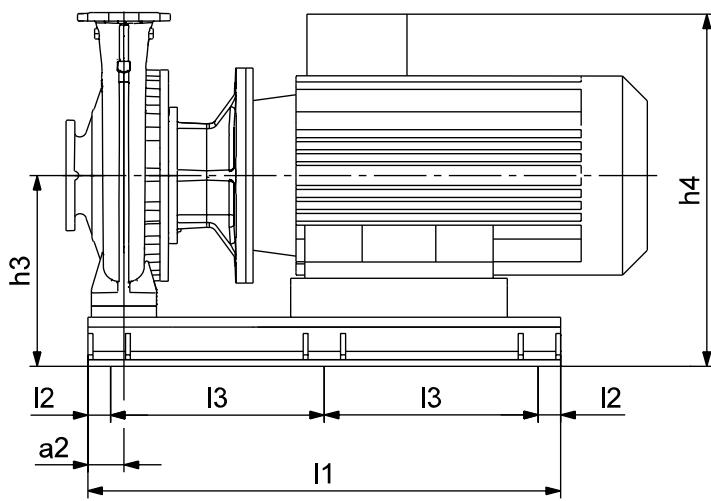


Base frame code	Dimensions [mm]
14 (IEC 280)	
15 (IEC 315)	

Base frame code	Dimensions [mm]
10K	 <p>TM049284</p>
10L	 <p>TM049285</p>
10M	 <p>TM049286</p>

NB pump dimensions as per motor type

NBG, 2-pole



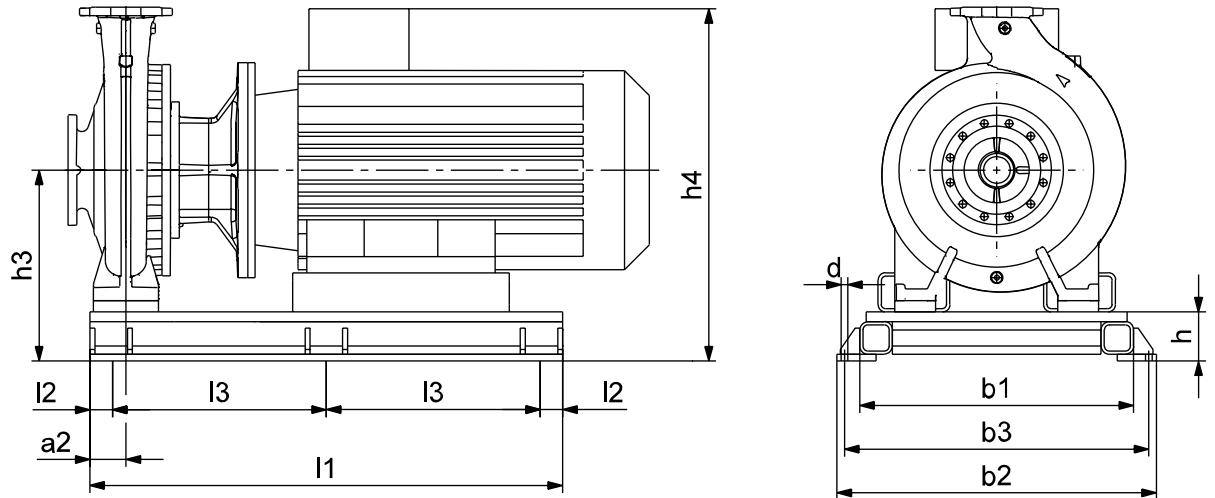
Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]										Weight [kg]	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d	Base frame incl. support blocks
65-40-315	45	225M	Siemens	13	1200	60	540	730	860	790	110	345	670	75	28	263
	45	225	MMG-E	13	1200	60	540	730	860	790	110	345	665	75	28	263
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	345	772	75	28	263
80-50-315	45	225M	Siemens	13	1200	60	540	730	860	790	110	345	670	75	28	259
	45	225	MMG-E	13	1200	60	540	730	860	790	110	345	665	75	28	259
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	345	772	75	28	259
	55	250M	Siemens	13	1200	60	540	730	860	790	110	395	787	75	28	293
	55	250	MMG-E	13	1200	60	540	730	860	790	110	395	754	75	28	293
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	395	888	75	28	293
	45	225M	Siemens	13	1200	60	540	730	860	790	110	345	670	90	28	265
	45	225	MMG-E	13	1200	60	540	730	860	790	110	345	665	90	28	265
100-65-250	45	225M	MMG-G	13	1200	60	540	730	860	790	110	345	772	90	28	265
	55	250M	Siemens	13	1200	60	540	730	860	790	110	410	802	90	28	343
	55	250	MMG-E	13	1200	60	540	730	860	790	110	410	769	90	28	343
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	410	903	90	28	343
	75	280S	Siemens	14	1300	65	585	670	810	730	130	430	862	90	28	359
	75	280	MMG-E	14	1300	65	585	670	810	730	130	430	816	90	28	359
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	410	903	90	28	308
	55	250M	Siemens	13	1200	60	540	730	860	790	110	395	787	90	28	296
100-65-315	55	250	MMG-E	13	1200	60	540	730	860	790	110	395	754	90	28	296
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	296
	75	280S	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	318
	75	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	318
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	267
	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	319
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	319
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	319
125-80-200	110	280M	MMG-G	14	1300	65	585	670	810	730	130	475	998	90	28	384
	110	315S	Siemens	15	1450	65	660	840	980	920	150	495	990	90	28	454
	110	315	MMG-E	15	1450	65	660	840	980	920	150	495	966	90	28	454
	45	225M	Siemens	13	1200	60	540	730	860	790	110	350	675	75	28	270
	45	225	MMG-E	13	1200	60	540	730	860	790	110	350	670	75	28	270
125-80-250	45	225M	MMG-G	13	1200	60	540	730	860	790	110	350	777	75	28	270
	55	250M	Siemens	13	1200	60	540	730	860	790	110	390	782	75	28	309
	55	250	MMG-E	13	1200	60	540	730	860	790	110	390	749	75	28	309
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	390	883	75	28	309
	45	225M	Siemens	13	1200	60	540	730	860	790	110	345	670	90	28	260
125-80-250	45	225	MMG-E	13	1200	60	540	730	860	790	110	345	665	90	28	260
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	345	772	90	28	260
	55	250M	Siemens	13	1200	60	540	730	860	790	110	395	787	90	28	296
	55	250	MMG-E	13	1200	60	540	730	860	790	110	395	754	90	28	296
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	296
	75	280S	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	318
	75	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	318
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	267
125-80-250	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	319
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	319
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	319

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]											Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d		
125-80-315	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	314	
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	314	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	314	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	458	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	458	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	480	1003	90	28	388	
	132	315M	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	462	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	462	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	462	
	160	315L	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	466	
125-100-200	160	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	466	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	466	
	45	225M	Siemens	13	1200	60	540	730	860	790	110	345	670	90	28	265	
	45	225	MMG-E	13	1200	60	540	730	860	790	110	345	665	90	28	265	
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	345	772	90	28	265	
	55	250M	Siemens	13	1200	60	540	730	860	790	110	410	802	90	28	343	
	55	250	MMG-E	13	1200	60	540	730	860	790	110	410	769	90	28	343	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	410	903	90	28	343	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	430	862	90	28	359	
	75	280	MMG-E	14	1300	65	585	670	810	730	130	430	816	90	28	359	
125-100-250	75	250M	MMG-G	13	1200	60	540	730	860	790	110	410	903	90	28	308	
	55	250M	Siemens	13	1200	60	540	730	860	790	110	395	787	90	28	296	
	55	250	MMG-E	13	1200	60	540	730	860	790	110	395	754	90	28	296	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	296	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	318	
	75	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	318	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	267	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	319	
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	319	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	319	
125-100-315	110	315S	Siemens	15	1450	65	660	840	980	920	150	495	990	90	28	454	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	495	966	90	28	454	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	475	998	90	28	384	
	132	315M	Siemens	15	1450	65	660	840	980	920	150	495	990	90	28	458	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	495	966	90	28	458	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	495	1043	90	28	458	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	458	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	458	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	480	1003	90	28	388	
	132	315M	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	462	
125-100-315	132	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	462	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	462	
	160	315L	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	466	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	466	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	466	
	200	315L	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	466	
	200	315	MMG-E	15	1450	65	660	840	980	920	150	500	1024	90	28	466	
	200	315M	MMG-G	15	1450	65	660	840	980	920	150	500	995	90	28	466	

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]											Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d		
150-125-200	45	225M	Siemens	13	1200	60	540	730	860	790	110	360	685	90	28	269	
	45	225	MMG-E	13	1200	60	540	730	860	790	110	360	680	90	28	269	
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	360	787	90	28	269	
	55	250M	Siemens	13	1200	60	540	730	860	790	110	395	787	90	28	291	
	55	250	MMG-E	13	1200	60	540	730	860	790	110	395	754	90	28	291	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	291	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	314	
	75	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	314	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	395	888	90	28	263	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	314	
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	314	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	314	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	458	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	458	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	480	1003	90	28	388	
150-125-250	90	280M	Siemens	14	1300	65	585	670	810	730	130	415	847	90	28	314	
	90	280	MMG-E	14	1300	65	585	670	810	730	130	415	801	90	28	314	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	415	938	90	28	314	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	458	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	458	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	480	1003	90	28	388	
	132	315M	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	462	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	462	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	462	
	160	315L	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	466	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	500	971	90	28	466	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	500	1048	90	28	466	
	200	315L	Siemens	15	1450	65	660	840	980	920	150	500	995	90	28	466	
	200	315	MMG-E	15	1450	65	660	840	980	920	150	500	1024	90	28	466	
	200	315M	MMG-G	15	1450	65	660	840	980	920	150	500	995	90	28	466	
150-125-315	132	315M	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	433	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	433	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	433	
	160	315L	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	436	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	436	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	436	
	200	315L	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	436	
	200	315	MMG-E	15	1450	65	660	840	980	920	150	490	1014	110	28	436	
	200	315M	MMG-G	15	1450	65	660	840	980	920	150	490	985	110	28	436	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	410	842	110	28	302	
	75	280	MMG-E	14	1300	65	585	670	810	730	130	410	796	110	28	302	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	390	883	110	28	251	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	410	842	110	28	302	
	90	280	MMG-E	14	1300	65	585	670	810	730	130	410	796	110	28	302	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	410	933	110	28	302	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	430	
	110	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	430	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	470	993	110	28	360	

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]											Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d		
200-150-250	132	315M	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	433	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	433	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	433	
	160	315L	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	436	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	436	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	436	
	200	315L	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	436	
	200	315	MMG-E	15	1450	65	660	840	980	920	150	490	1014	110	28	436	
	200	315M	MMG-G	15	1450	65	660	840	980	920	150	490	985	110	28	436	

For pumps with other motor type, information about pump dimensions, weight and base frames number, see Grundfos Product Center.

NBG, 4-pole

Pump type	P ₂ [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]												Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d			
125-80-400	37	225S	Siemens	13	1200	60	540	730	860	790	110	395	720	90	28	266		
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	395	715	90	28	266		
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	395	822	90	28	266		
	45	225M	Siemens	13	1200	60	540	730	860	790	110	395	720	90	28	267		
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	395	715	90	28	267		
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	395	822	90	28	267		
125-100-400	37	225S	Siemens	13	1200	60	540	730	860	790	110	395	720	110	28	267		
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	395	715	110	28	267		
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	395	822	110	28	267		
	45	225M	Siemens	13	1200	60	540	730	860	790	110	395	720	110	28	267		
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	395	715	110	28	267		
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	395	822	110	28	267		
150-125-315	37	225S	Siemens	13	1200	60	540	730	860	790	110	395	787	110	28	286		
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	395	754	110	28	286		
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	395	888	110	28	286		
	45	225M	Siemens	13	1200	60	540	730	860	790	110	395	720	110	28	267		
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	395	822	110	28	267		
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	395	822	110	28	267		
150-125-400	37	225S	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	280		
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	280		
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	280		
	45	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282		
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282		
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282		
	55	250M	Siemens	13	1200	60	540	730	860	790	110	425	817	110	28	314		
	55	250M	MMG-E	13	1200	60	540	730	860	790	110	425	784	110	28	314		
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	314		
	75	280S	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	337		
	75	280S	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	337		
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	286		
	90	280M	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	341		
	90	280M	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	341		
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	445	968	110	28	341		

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]											Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d		
150-125-500	55	250M	Siemens	13	1200	60	540	730	860	790	110	540	932	110	28	311	
	55	250M	MMG-E	13	1200	60	540	730	860	790	110	540	899	110	28	311	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	540	1033	110	28	311	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	590	1022	110	28	376	
	75	280S	MMG-E	14	1300	65	585	670	810	730	130	590	976	110	28	376	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	570	1063	110	28	325	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	590	1022	110	28	381	
	90	280M	MMG-E	14	1300	65	585	670	810	730	130	590	976	110	28	381	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	590	1113	110	28	381	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	439	
	110	315S	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	439	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	565	1088	110	28	369	
	132	315MA	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	444	
	132	315MA	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	444	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	585	1133	110	28	444	
	160	315MB	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	449	
	160	315MB	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	449	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	585	1133	110	28	449	
200-150-250	37	225S	Siemens	13	1200	60	540	730	860	790	110	395	720	110	28	267	
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	395	715	110	28	267	
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	395	822	110	28	267	
	45	225M	Siemens	13	1200	60	540	730	860	790	110	395	720	110	28	267	
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	395	715	110	28	267	
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	395	822	110	28	267	
200-150-315.2	37	225S	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	280	
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	280	
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	280	
	45	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282	
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282	
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282	
	55	250M	Siemens	13	1200	60	540	730	860	790	110	425	817	110	28	314	
	55	250M	MMG-E	13	1200	60	540	730	860	790	110	425	784	110	28	314	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	314	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	337	
	75	280S	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	337	
200-150-315	75	250M	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	286	
	37	225S	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	280	
	37	225S	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	280	
	37	225S	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	280	
	45	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282	
	45	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282	
	45	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282	
	55	250M	Siemens	13	1200	60	540	730	860	790	110	425	817	110	28	314	
	55	250M	MMG-E	13	1200	60	540	730	860	790	110	425	784	110	28	314	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	314	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	337	
	75	280S	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	337	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	286	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	341	
	90	280M	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	341	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	445	968	110	28	341	

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]											Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d		
200-150-400	55	250M	Siemens	13	1200	60	540	730	860	790	110	425	817	110	28	314	
	55	250M	MMG-E	13	1200	60	540	730	860	790	110	425	784	110	28	314	
	55	250S	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	314	
	75	280S	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	337	
	75	280S	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	337	
	75	250M	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	286	
	90	280M	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	341	
	90	280M	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	341	
	90	280S	MMG-G	14	1300	65	585	670	810	730	130	445	968	110	28	341	
	110	315S	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	414	
	110	315S	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	414	
	110	280M	MMG-G	14	1300	65	585	670	810	730	130	470	993	110	28	344	
	132	315MA	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	418	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	418	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	418	
	160	315MB	Siemens	15	1450	65	660	840	980	920	150	490	985	110	28	380	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	490	961	110	28	380	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	490	1038	110	28	380	
200-150-500	132	315MA	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	444	
	132	315	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	444	
	132	315S	MMG-G	15	1450	65	660	840	980	920	150	585	1133	110	28	444	
	160	315MB	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	449	
	160	315	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	449	
	160	315M	MMG-G	15	1450	65	660	840	980	920	150	585	1133	110	28	449	
	200	315L	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28	444	
	200	315L	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28	444	
	200	315M	MMG-G	15	1450	65	660	840	980	920	150	585	1133	110	28	444	

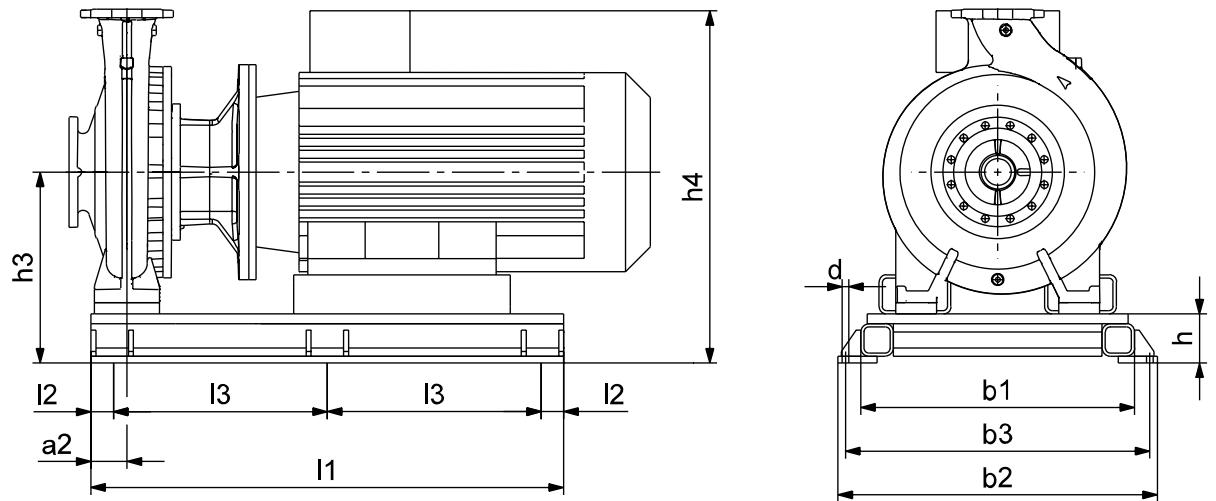
For pumps with other motor type, information about pump dimensions, weight and base frames number, see Grundfos Product Center.

Pump type	P2 [kW]	Siemens		MMG-E		MMG-G		MMG-H	
		Motor frame size	Base frame number						
250-200-400	37	225S	10K	225S	10K	225S	10K	225S	10K
	45	225M	10K	225M	10K	225MC	10K	225M	10K
	55	250M	10L	250M	10L	250SC	10K	250M	10L
	75	280S	10L	280S	10L	250M	10L	280S	10L
	90	280M	10L	280M	10L	280M	10L	280M	10L
	110	315S	10L	315S	10L	280M	10L	315S	10L
	132	315MA	10M	315M	10M	315MA	10M	315LA	10M
	160	315LA	10M	315LA	10M	315MB	10M	315LA	10M
250-200-450	200	315LA	10M	315LA	10M	315MB	10M	315LA	10M
	75	280S	10L	280S	10L	250MC	10L	280S	10L
	90	280M	10L	280M	10L	280S	10L	280M	10L
	110	315S	10L	315S	10L	280M	10L	315S	10L
	132	315MA	10M	315M	10M	315S	10L	315LA	10M
	160	315LA	10M	315LA	10M	315MB	10M	315LA	10M
	200	315MA	10M	315LA	10M	315MA	10M	315LA	10M

Pump type	P2 [kW]	Siemens		MMG-E		MMG-G		MMG-H	
		Motor frame size	Base frame number						
300-250-350	37	225S	10K	225S	10K	225S	10K	225S	10K
	45	225M	10K	225M	10K	225MC	10K	225M	10K
	55	250M	10L	250M	10L	250SC	10K	250M	10L
	75	280S	10L	280S	10L	250M	10L	280S	10L
	90	280M	10L	280M	10L	280S	10L	280M	10L
	110	315S	10L	315S	10L	280M	10L	315S	10L
	132	315MA	10M	315M	10M	315S	10L	315MA	10M
300-250-400	45	225M	10K	225M	10K	225MC	10K	225M	10K
	55	250M	10L	250M	10L	250SC	10K	250M	10L
	75	280S	10L	280S	10L	250M	10L	280S	10L
	90	280M	10L	280M	10L	280S	10L	280M	10L
	110	315S	10L	315S	10L	280M	10L	315S	10L
	132	315MA	10M	315M	10M	315S	10L	315MA	10M
	160	315LA	10M	315LA	10M	315MB	10M	315LA	10M
300-250-450	200	315MB	10M	315LA	10M	315MB	10M	315LA	10M
	75	280S	10L	280S	10L	250MC	10L	280S	10L
	90	280M	10L	280M	10L	280S	10L	280M	10L
	110	315S	10L	315S	10L	280M	10L	315S	10L
	132	315MA	10M	315M	10M	315S	10L	315LA	10M
	160	315LA	10M	315LA	10M	315MB	10M	315LA	10M
	160	315L	10M	315L	10M	315MB	10M	315L	10M
300-250-500	200	315MB	10M	315L	10M	315MB	10M	315L	10M

For information about pump dimensions and weight, see Grundfos Product Center

NBG, 6-pole



TM040482

Pump type	P ₂ [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]										Weight [kg] Base frame incl. support blocks	
					I ₁	I ₂	I ₃	b ₁	b ₂	b ₃	h	h ₃	h ₄	a ₂		
150-125-400	30	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282
	30	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282
	30	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282
150-125-500	30	225M	Siemens	13	1200	60	540	730	860	790	110	515	840	110	28	295
	30	225M	MMG-E	13	1200	60	540	730	860	790	110	515	835	110	28	295
	30	225M	MMG-G	13	1200	60	540	730	860	790	110	515	942	110	28	295
	37	250M	Siemens	13	1200	60	540	730	860	790	110	540	932	110	28	311
	37	250M	MMG-E	13	1200	60	540	730	860	790	110	540	899	110	28	311
	37	250S	MMG-G	13	1200	60	540	730	860	790	110	540	1033	110	28	311
	45	280S	Siemens	14	1300	65	585	670	810	730	130	530	962	110	28	350
	45	280S	MMG-E	14	1300	65	585	670	810	730	130	530	916	110	28	350
	45	250M	MMG-G	13	1200	60	540	730	860	790	110	510	1003	110	28	299
	55	280M	Siemens	14	1300	65	585	670	810	730	130	530	962	110	28	355
	55	280M	MMG-E	14	1300	65	585	670	810	730	130	530	916	110	28	355
	55	280S	MMG-G	14	1300	65	585	670	810	730	130	530	1053	110	28	355
200-150-315	30	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282
	30	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282
	30	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282
200-150-400	30	225M	Siemens	13	1200	60	540	730	860	790	110	435	760	110	28	282
	30	225M	MMG-E	13	1200	60	540	730	860	790	110	435	755	110	28	282
	30	225M	MMG-G	13	1200	60	540	730	860	790	110	435	862	110	28	282
	37	250M	Siemens	13	1200	60	540	730	860	790	110	425	817	110	28	314
	37	250M	MMG-E	13	1200	60	540	730	860	790	110	425	784	110	28	314
	37	250S	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	314
	45	280S	Siemens	14	1300	65	585	670	810	730	130	445	877	110	28	337
	45	280S	MMG-E	14	1300	65	585	670	810	730	130	445	831	110	28	337
	45	250M	MMG-G	13	1200	60	540	730	860	790	110	425	918	110	28	286

Pump type	P2 [kW]	Motor frame size	Motor	Base frame code	Dimensions [mm]												Weight [kg] Base frame incl. support blocks	
					I1	I2	I3	b1	b2	b3	h	h3	h4	a2	d			
200-150-500	37	250M	Siemens	13	1200	60	540	730	860	790	110	540	932	110	28		311	
	37	250M	MMG-E	13	1200	60	540	730	860	790	110	540	899	110	28		311	
	37	250S	MMG-G	13	1200	60	540	730	860	790	110	540	1033	110	28		311	
	45	280S	Siemens	14	1300	65	585	670	810	730	130	530	962	110	28		350	
	45	280S	MMG-E	14	1300	65	585	670	810	730	130	530	916	110	28		350	
	45	250M	MMG-G	13	1200	60	540	730	860	790	110	510	1003	110	28		299	
	55	280M	Siemens	14	1300	65	585	670	810	730	130	530	962	110	28		355	
	55	280M	MMG-E	14	1300	65	585	670	810	730	130	530	916	110	28		355	
	55	280S	MMG-G	14	1300	65	585	670	810	730	130	530	1053	110	28		355	
	75	315S	Siemens	15	1450	65	660	840	980	920	150	585	1080	110	28		439	
	75	315S	MMG-E	15	1450	65	660	840	980	920	150	585	1056	110	28		439	
	75	280M	MMG-G	14	1300	65	585	670	810	730	130	565	1088	110	28		369	

For pumps with other motor type, information about pump dimensions, weight and base frames number, see Grundfos Product Center.

Pump type	P2 [kW]	Siemens		MMG-E		MMG-G		MMG-H	
		Motor frame size	Base frame number						
250-200-400	15	180L	10K	180L	10K	180LC	10K	180L	10K
	18.5	200L	10K	200L	10K	200L	10K	200L	10K
	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225MC	10K	225M	10K
	37	250M	10L	250M	10L	250SC	10K	250M	10L
	45	280S	10L	280S	10L	250M	10L	280S	10L
	55	280M	10L	280M	10L	280S	10L	280M	10L
	18.5	200L	10K	200L	10K	200L	10K	200L	10K
	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225MC	10K	225M	10K
250-200-450	37	250MC	10L	250MC	10L	250SC	10K	250MC	10L
	45	280S	10L	280S	10L	250MC	10L	280S	10L
	55	280M	10L	280M	10L	280S	10L	280M	10L
	75	315S	10L	315S	10L	280M	10L	315S	10L
	90	315MA	10M	315MA	10M	315S	10L	315MA	10M
	11	160L	10K	160L	10K	160L	10K	160L	10K
	15	180L	10K	180L	10K	180LC	10K	180L	10K
	18.5	200L	10K	200L	10K	200L	10K	200L	10K
	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225M	10K	225M	10K
300-250-350	37	250M	10L	250M	10L	250SC	10K	250M	10L
	45	280S	10L	280S	10L	250M	10L	280S	10L
	15	180L	10K	180L	10K	180LC	10K	180L	10K
	18.5	200L	10K	200L	10K	200L	10K	200L	10K
	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225M	10K	225M	10K
	37	250M	10L	250M	10L	250SC	10K	250M	10L
	45	280S	10L	280S	10L	250M	10L	280S	10L
	15	180L	10K	180L	10K	180LC	10K	180L	10K
	18.5	200L	10K	200L	10K	200L	10K	200L	10K
300-250-400	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225M	10K	225M	10K
	37	250M	10L	250M	10L	225M	10K	250M	10L
	45	280S	10L	280S	10L	250M	10L	280S	10L
	55	280M	10L	280M	10L	280S	10L	280M	10L
	75	315S	10L	315S	10L	280M	10L	315S	10L
	90	315MA	10M	315MA	10M	315S	10L	315MA	10M

Pump type	P2 [kW]	Siemens		MMG-E		MMG-G		MMG-H	
		Motor frame size	Base frame number						
300-250-450	18.5	200L	10K	200L	10K	200L	10K	200L	10K
	22	200L	10K	200L	10K	200L	10K	200L	10K
	30	225M	10K	225M	10K	225MC	10K	225M	10K
	37	250M	10L	250M	10L	250SC	10K	250M	10L
	45	280S	10L	280S	10L	250MC	10L	280S	10L
	55	280M	10L	280M	10L	280S	10L	280M	10L
	75	315S	10L	315S	10L	280M	10L	315S	10L
	90	315MA	10M	315MA	10M	315S	10L	315LA	10M
	110	315LA	10M	315LA	10M	315MB	10M	315LA	10M
300-250-500	45	280S	10L	280S	10L	250MC	10L	280S	10L
	55	280M	10L	280M	10L	280S	10L	280M	10L
	75	315S	10L	315S	10L	280M	10L	315S	10L
	90	315M	10M	315M	10M	315S	10L	315M	10M
	110	315L	10M	315L	10M	315M	10M	315L	10M
	132	315M	10M	315L	10M	315M	10M	315L	10M
	160	315L	10M	-	-	-	-	-	-

For information about pump dimensions and weight, see Grundfos Product Center.

NBG base frames, product numbers

When you order a separate base frame, you will receive the components needed for mounting the pump on the base frame such as:

- base frame
- eye bolts for lifting
- support blocks or support rail
- instructions
- nuts and bolts for securing the pump on the base frame.

NBG, 2-pole, 50 Hz

Pump type	P2 [kW]	Product number			
		Base frame			
		Siemens/ MG	MMG-E	MMG-G	MMG-H
65-40-315	45	95921801	95921802	95921801	95921802
80-50-315	45	95921803	95921804	95921803	95921804
80-50-315	55	95921813	95921813	95921814	95921813
100-65-250	45	95921805	95921806	95921805	95921806
100-65-250	55	95921815	95921815	95921816	95921815
100-65-250	75	95921830	95921830	95921825	95921830
100-65-315	55	95921817	95921817	95921818	95921817
100-65-315	75	95921831	95921831	95921826	95921831
100-65-315	90	95921835	95921835	95921836	95921835
100-65-315	110	95921848	95921849	95921844	95921849
125-80-200	45	95921807	95921808	95921807	95921808
125-80-200	55	95921819	95921819	95921820	95921819
125-80-250	45	95921809	95921810	95921809	95921810
125-80-250	55	95921821	95921821	95921822	95921821
125-80-250	75	95921832	95921832	95921827	95921832
125-80-250	90	95921837	95921837	95921838	95921837
125-80-315	90	95921839	95921839	95921840	95921839
125-80-315	110	95921850	95921851	95921845	95921851
125-80-315	132	95921856	95921857	95921858	95921857
125-80-315	160	95921865	95921866	95921867	95921866
125-100-200	45	95921805	95921806	95921805	95921806
125-100-200	55	95921815	95921815	95921816	95921815
125-100-200	75	95921830	95921830	95921825	95921830
125-100-250	55	95921817	95921817	95921818	95921817
125-100-250	75	95921831	95921831	95921826	95921831
125-100-250	90	95921835	95921835	95921836	95921835
125-100-250	110	95921848	95921849	95921844	95921849
125-100-250	132	95921859	95921860	95921861	95921860
125-100-315	110	95921850	95921851	95921845	95921851
125-100-315	132	95921856	95921857	95921858	95921857
125-100-315	160	95921865	95921866	95921867	95921866
125-100-315	200	95921865	95921866	95921867	95921866
150-125-200	45	95921811	95921812	95921811	95921812
150-125-200	55	95921823	95921823	95921824	95921823
150-125-200	75	95921833	95921833	95921828	95921833
150-125-200	90	95921841	95921841	95921842	95921841
150-125-200	110	95921852	95921853	95921846	95921853
150-125-250	90	95921839	95921839	95921840	95921839
150-125-250	110	95921850	95921851	95921845	95921851

Pump type	P2 [kW]	Product number			
		Siemens/ MG	MMG-E	MMG-G	MMG-H
150-125-250	132	95921856	95921857	95921858	95921857
150-125-250	160	95921865	95921866	95921867	95921865
150-125-250	200	95921865	95921866	95921867	95921865
150-125-315	132	95921862	95921863	95921864	95921863
150-125-315	160	95921868	95921869	95921870	95921868
150-125-315	200	95921868	95921869	95921870	95921868
200-150-200	75	95921834	95921834	95921829	95921834
200-150-200	90	95921843	95921843	95921834	95921843
200-150-200	110	95921854	95921855	95921847	95921855
200-150-250	132	95921862	95921863	95921864	95921863
200-150-250	160	95921868	95921869	95921870	95921868
200-150-250	200	95921868	95921869	95921870	95921868

NBG 4-pole, 50 Hz

Pump type	P2 [kW]	Product number			
		Base frame			
		Siemens/ MG	MMG-E	MMG-G	MMG-H
125-80-400	37	95921891	95921892	95921891	95921892
125-80-400	45	95921899	95921900	95921901	95921900
125-100-400	37	95921893	95921894	95921893	95921894
125-100-400	45	95921902	95921903	95921904	95921903
125-100-400	55	95921911	95921911	95921912	95921911
150-125-315	37	95921893	95921894	95921893	95921894
150-125-315	45	95921902	95921903	95921904	95921903
150-125-400	37	95921895	95921896	95921895	95921896
150-125-400	45	95921905	95921906	95921907	95921906
150-125-400	55	95921913	95921913	95921914	95921913
150-125-400	75	95921922	95921922	95921919	95921922
150-125-400	90	95921925	95921925	95921926	95921925
150-125-500	55	95921915	95921915	95921916	95921915
150-125-500	75	95921923	95921923	95921920	95921923
150-125-500	90	95921927	95921927	95921928	95921927
150-125-500	110	95921933	95921934	95921931	95921934
150-125-500	132	95921937	95921938	95921939	95921938
150-125-500	160	95921943	95921944	95921945	95921944
200-150-250	37	95921893	95921894	95921893	95921894
200-150-250	45	95921902	95921903	95921904	95921903
200-150-315.2	37	95921897	95921898	95921897	95921898
200-150-315.2	45	95921908	95921909	95921910	95921909
200-150-315.2	55	95921917	95921917	95921918	95921917
200-150-315.2	75	95921924	95921924	95921921	95921924
200-150-315	37	95921897	95921898	95921897	95921898
200-150-315	45	95921908	95921909	95921910	95921909
200-150-315	55	95921917	95921917	95921918	95921917
200-150-315	75	95921924	95921924	95921921	95921924
200-150-315	90	95921929	95921929	95921930	95921929
200-150-400	55	95921965	95921965	95921966	95921965
200-150-400	75	95921968	95921968	95921967	95921968
200-150-400	90	95921969	95921969	95921970	95921969
200-150-400	110	95921935	95921936	95921932	95921936
200-150-400	132	95921940	95921941	95921942	95921941
200-150-400	160	95921946	95921947	95921948	95921947
200-150-500	132	95921937	95921938	95921939	95921938
200-150-500	160	95921943	95921944	95921945	95921945
200-150-500	200	95921937	95921944	95921937	95921945
250-200-400					
250-200-450					
300-250-350					Base frames are not available as an accessory for these pump sizes, but can be configured as a part of the pump.
300-250-400					
300-250-450					
300-250-500					
350-300-305					Base frames are only available on request.

NBG 6-pole, 50 Hz

Pump type	P2 [kW]	Product number			
		Base frame			
		Siemens/ MG	MMG-E	MMG-G	MMG-H
150-125-400	30	95921905	95921906	95921907	95921906
150-125-500	30	95921959	95921960	95921961	95921960
150-125-500	37	95921915	95921915	95921916	95921915
150-125-500	45	95921962	95921962	95921971	95921962
150-125-500	55	95921963	95921963	95921964	95921963
200-150-315	30	95921908	95921909	95921910	95921909
200-150-400	30	95921908	95921909	95921910	95921909
200-150-400	37	95921965	95921965	95921966	95921965
200-150-400	45	95921968	95921968	95921967	95921968
200-150-500	37	95921915	95921915	95921916	95921915
200-150-500	45	95921962	95921962	95921971	95921962
200-150-500	55	95921963	-	95921964	-
200-150-500	75	95921933	95921933	95921931	95921933
250-200-400					
250-200-450					
300-250-350					Base frames are not available as an accessory for these pump sizes, but can be configured as a part of the pump.
300-250-400					
300-250-450					
300-250-500					
350-300-305					Base frames are only available on request.

NBG 8-pole, 50 Hz

Pump type	P2 [kW]	Product number			
		Base frame			
		Siemens/ MG	MMG-E	MMG-G	MMG-H
350-300-305					Base frames are only available on request.

20. Motor data

Standard motor ranges

The table shows the range of standard motors currently used for NBG, NKG pumps. The motors stated in section Dimensional drawings and technical data are MG and Siemens motors.

IE class	Motor	Pole	P2 [kW]																															
			0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200	250	315	355				
IE2	MG	4	●	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
	MG	2	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
		2	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
	Siemens	4	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
-IE3		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
		8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
		2	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	MMG-G	4	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
		2	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Siemens	4	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
IE4		6	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		2	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	MMG-G	4	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		6	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
IE5	Nidec	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Note: Not all motor makes are available worldwide. For specific information about the motor makes available in your region, contact your Grundfos Customer Service Unit (CSU).

E-solution range

Pole	IE class	P2 [kW]																														
		0.55	0.75	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55														
	IE4 ²⁴⁾	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●														
2	IE5 ²⁵⁾	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	-			
	IE5 ²⁶⁾	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●													
	IE4 ²⁴⁾	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●	●													
4	IE5 ²⁵⁾	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-	-	
	IE5 ²⁶⁾	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●	●	●	●													

²⁴⁾ Siemens motor with integrated CUE

²⁵⁾ MGE Motor

²⁶⁾ Nidec motor with integrated CUE

Electrical data, IE3 motors**MG, 2-pole**

Motor	Frame size	IE class	Voltage [V]	P2 [kW]	I _{1/1} [A]	η [%]	Cos φ 1/1	n [min ⁻¹]	I _{start} / I _{1/1}
MG-C	71A	IE3	3 × 220-240 Δ / 380-415 Y	0.37	1.74 / 1.00	78.5	0.80 - 0.70	2850-2880	4.9 - 5.3
MG-C	71B	IE3		0.55	2.50 / 1.44	80.0	0.80 - 0.70	2830-2850	5.8 - 6.2
MG-H3	80A	IE3	3 × 220-240 Δ / 380-415 Y	0.75	3.30 / 1.90	80.7	0.81 - 0.71	2840-2870	5.8 - 6.2
MG-H3	80C	IE3		1.1	4.35 / 2.50	82.7	0.83 - 0.76	2840-2870	4.5 - 5.0
MG-H3	90SB	IE3		1.5	5.45 / 3.15	84.2	0.87 - 0.82	2890-2910	8.5 - 9.3
MG-H3	90LC	IE3		2.2	7.70 / 4.45	85.9	0.89 - 0.87	2890-2910	8.5 - 9.5
MG-H3	100LC	IE3		3	11.0 / 6.30	87.1	0.87 - 0.82	2900-2920	8.4 - 9.2
MG-H3	112MC	IE3	3 × 380-415 Δ	4	13.6 / 7.90	88.1	0.87	2920-2940	10.0 - 11.1
MG-H3	90LC	IE3		2.2	4.45	85.9	0.89 - 0.87	2890-2910	8.5 - 9.5
MG-H3	100LC	IE3		3	6.30	87.1	0.87 - 0.82	2900-2920	8.4 - 9.2
MG-H3	112MC	IE3		4	7.90	88.1	0.87	2920-2940	10.0 - 11.1
MG-H3	132SC	IE3		5.5	11.0	89.2	0.87 - 0.82	2920-2940	10.8 - 11.8
MG-H3	132SB	IE3	3 × 380-415 Δ / 660-690 Y	7.5	14.4 - 14.0 / 8.30 - 8.10	90.1	0.88 - 0.82	2910-2920	7.8 - 9.1
MG-H3	160MB	IE3		11	20.8 - 19.8 / 12.0 - 11.8	91.2	0.88 - 0.84	2940-2950	6.6 - 7.8
MG-H3	160MD	IE3		15	28.0 - 26.0 / 16.2 - 15.6	91.9	0.89 - 0.87	2930-2950	6.6 - 7.8
MG-H3	160LB	IE3		18.5	34.5 - 32.5 / 20.0 - 18.8	92.4	0.89 - 0.85	2940-2950	8.3 - 9.8
MG-H3	180MB	IE3		22	39.5 / 22.8	92.7	0.90	2950	8.3 - 8.3

Siemens, 2-pole

Motor	Frame size	IE class	Voltage [V]	P2 [kW]	I _{1/1} [A]	η [%]	Cos φ 1/1	n [min ⁻¹]	I _{start} / I _{1/1}
Siemens	80M	IE3	3 x 220-240 Δ / 380-420 Y	0.75	2.80 - 2.60 / 1.60 - 1.50	80.7	0.86	2850	6.2
Siemens	80M	IE3		1.1	3.88 - 3.98 / 2.24 - 2.30	82.7	0.85	2885	7.1
Siemens	90S	IE3		1.5	5.37 - 5.11 / 3.1 - 2.95	84.2	0.86	2910	8.1
Siemens	90L	IE3		2.2	7.53 - 7.10 / 4.35 - 4.10	85.9	0.88	2910	8.3
Siemens	100L	IE3		3	10.2 - 9.20 / 5.90 - 5.30	87.1	0.88	2920	8.1
Siemens	112M	IE3		4	13.6 - 12.2 / 7.80 - 7.00	88.1	0.89	2955	8.0
Siemens	100L	IE3		3	5.90 - 5.30 / 3.40 - 3.10	87.1	0.88	2920	8.1
Siemens	112M	IE3		4	7.80 - 7.00 / 4.50 - 4.10	88.1	0.89	2955	8.0
Siemens	132S	IE3		5.5	10.4 - 9.40 / 6.00 - 5.40	89.2	0.90	2950	7.3
Siemens	132S	IE3		7.5	13.8 - 12.4 / 9.00 - 7.20	90.1	0.92	2950	8.3
Siemens	160M	IE3		11	21.0 - 19.0 / 12.2 - 11.0	91.2	0.87	2955	7.6
Siemens	160M	IE3		15	29.0 - 26.0 / 17.0 - 15.0	91.9	0.86	2955	8.4
Siemens	160L	IE3		18.5	33.5 - 30.5 / 19.6 - 17.6	92.4	0.90	2960	8.5
Siemens	180M	IE3		22	40.5 - 36.5 / 23.6 - 21.0	92.7	0.89	2950	7.5
Siemens	200L	IE3		30	56.0 - 51.0 / 32.0 - 29.5	93.3	0.86	2955	6.6
Siemens	200L	IE3		37	68.0 - 63.0 / 39.0 - 36.0	93.7	0.87	2955	6.7
Siemens	225M	IE3		45	82.0 - 75.0 / 47.5 - 43.5	94.0	0.89	2960	6.9
Siemens	250M	IE3		55	99.0 - 92.0 / 57.0 - 53.0	94.3	0.89	2975	6.7
Siemens	315L	IE3		250	435-395 / 250-230	95.8	0.92	2985	8.8
Siemens	315L	IE3		315	550-530 / 320-305	95.8	0.89	2990	9.0
Siemens	355L	IE3		355	620-570 / 360-330	96.0	0.90	2980	6.5

Siemens, 4-pole

Motor	Frame size	IE class	Voltage [V]	P2 [kW]	I _{1/1} [A]	η [%]	Cos φ 1/1	n [min ⁻¹]	I _{start} / I _{1/1}
Siemens	80	IE3	3 × 220-240 Δ / 380-420 Y	0.75	3.10 - 3.05 / 1.79 - 1.75	82.5	0.75	1450	7.1
Siemens	90S	IE3		1.1	4.25 - 4.20 / 2.45 - 2.40	84.1	0.78	1440	6.9
Siemens	90L	IE3		1.5	5.55 - 5.39 / 3.20 - 3.11	85.3	0.80	1445	7.2
Siemens	100L	IE3		2.2	8.00 - 7.30 / 4.60 - 4.20	86.7	0.83	1465	8.4
Siemens	100L	IE3		3	10.8 - 9.70 / 6.30 - 5.60	87.7	0.83	1460	8.3
Siemens	112M	IE3		4	14.6 - 13.2 / 8.40 - 7.60	88.6	0.82	1460	7.1
Siemens	100L	IE3		2.2	4.60 - 4.20 / 2.70 - 2.46	86.7	0.83	1465	8.4
Siemens	100L	IE3		3	6.30 - 5.60 / 3.60 - 3.30	87.7	0.83	1460	8.3
Siemens	112M	IE3		4	8.40 - 7.60 / 4.80 - 4.40	88.6	0.82	1460	7.1
Siemens	132S	IE3		5.5	11.2 - 10.0 / 6.40 - 5.80	89.6	0.84	1475	8.2
Siemens	132M	IE3		7.5	15.0 - 13.6 / 8.70 - 7.90	90.4	0.84	1465	8.2
Siemens	160M	IE3		11	22.0 - 20.0 / 12.6 - 11.6	91.4	0.84	1475	7.6
Siemens	160L	IE3		15	30.0 - 27.5 / 17.6 - 16.0	92.1	0.82	1475	8.5
Siemens	180M	IE3		18.5	37.0 - 33.5 / 21.6 - 19.6	92.6	0.82	1470	6.9
Siemens	180L	IE3		22	42.5 - 40.5 / 24.6 - 23.6	93.0	0.83	1470	6.8
Siemens	200L	IE3		30	57.5 - 54.0 / 33.5 - 31.5	93.6	0.84	1470	6.9
Siemens	225S	IE3		37	69.0 - 64.0 / 39.5 - 37.0	93.9	0.86	1480	6.4
Siemens	225M	IE3		45	83.0 - 77.0 / 48.0 - 44.5	94.2	0.86	1480	6.4
Siemens	250M	IE3		55	100 - 93.0 / 58.0 - 54.0	94.6	0.87	1480	6.8
Siemens	315L	IE3		250	455-420 / 260-240	96.0	0.87	1490	7.7
Siemens	315L	IE3		315	570-550 / 330-320	96.0	0.86	1490	7.9
Siemens	315L	IE3		355	650-610 / 375-355	96.1	0.85	1490	6.5

Siemens, 6-pole

Motor	Frame size	IE class	Voltage [V]	P2 [kW]	I _{1/1} [A]	η [%]	Cos φ 1/1	n [min ⁻¹]	I _{start} / I _{1/1}
Siemens	80A	-	3 × 220-240 Δ / 380-415 Y	0.37	1.88 - 1.91 / 1.08 - 1.10	74.8	0.66	940	4.2
Siemens	80B	-		0.55	2.67 - 2.67 / 1.54 - 1.54	77.2	0.67	935	4.5
Siemens	90S	IE3		0.75	3.45 - 3.40 / 1.99 - 1.96	78.9	0.70	945	4.6
Siemens	90L	IE3		1.1	5.00 - 5.00 / 2.88 - 2.88	81.0	0.69	940	4.6
Siemens	100L	IE3		1.5	6.60 - 5.90 / 3.80 - 3.40	82.5	0.73	970	10
Siemens	112M	IE3	3 × 220-240 Δ / 380-420 Y	2.2	9.15 - 8.30 / 5.30 - 4.80	84.3	0.75	970	10
Siemens	132S	IE3		3	12.0 - 11.0 / 7.00 - 6.40	85.6	0.76	975	10
Siemens	132M	IE3		4	15.8 - 14.2 / 9.10 - 8.20	86.8	0.77	970	10
Siemens	112M	IE3		2.2	5.30 - 4.80 / 3.00 - 2.80	84.3	0.75	970	10
Siemens	132S	IE3		3	7.00 - 6.40 / 4.05 - 3.70	85.6	0.76	975	10
Siemens	132M	IE3		4	9.10 - 8.20 / 5.20 - 4.80	86.8	0.77	970	10
Siemens	132M	IE3		5.5	12.2 - 11.0 / 7.00 - 6.40	88.0	0.78	970	10
Siemens	160M	IE3		7.5	16.0 - 14.6 / 9.20 - 8.40	89.1	0.80	975	10
Siemens	160L	IE3		11	23.2 - 21.0 / 13.4 - 12.2	90.3	0.80	975	10
Siemens	180L	IE3	3 × 380-420 Δ / 660-725 Y	15	31.0 - 28.0 / 17.8 - 16.6	91.2	0.80	975	5.9
Siemens	200L	IE3		18.5	38.0 - 36.5 / 22.0 - 21.0	91.7	0.79	980	5.6
Siemens	200L	IE3		22	45.0 - 42.5 / 26.0 - 24.6	92.2	0.79	980	5.6
Siemens	225M	IE3		30	58.0 - 55.0 / 33.5 - 32.0	92.9	0.83	980	6.6
Siemens	250M	IE3		37	70.0 - 65.0 / 40.5 - 37.5	93.3	0.85	985	7.0
Siemens	280S	IE3		45	86.0 - 79.0 / 49.5 - 45.5	93.7	0.85	990	6.8
Siemens	280M	IE3		55	106 - 97.0 / 61.0 - 56.0	94.1	0.85	990	7.2

Siemens, 8-pole

The electrical data is available on request.

Electrical data, MGE motors

Electrical data for motors with built-in frequency converter.

Medium speed, 4000 RPM

Motor	Frame size	Voltage	P2 [kW]	I _{1/1} [A]
MGE	80B-IA		1.1	2.2 - 1.9
MGE	90SC-IA		1.5	2.9 - 2.4
MGE	90LD-IA		2.2	4.15 - 3.4
MGE	100LA-JA		3	5.8 - 4.8
MGE	112MC-JA		4	7.6 - 6.2
MGE	132SE-JA	3 × 380-480 V	5.5	10.3 - 8.2
MGE	132SF-JA		7.5	14.1 - 11.2
MGE	160MH-JA		11	20.3 - 16.0
MGE	160MA-K		15	26.7 - 22.0
MGE	160LB-K		18.5	33.0 - 27.8
MGE	180MC-K		22	39.2 - 31.5

Low speed, 2000/2200 RPM

Motor	Frame size	Voltage	P2 [kW]	I _{1/1} [A]
MGE	80B-IA		0.55	1.2 - 1.1
MGE	80C-IA		0.75	1.55 - 1.4
MGE	90SD-IA		1.1	2.2 - 1.9
MGE	90LD-IA		1.5	2.9 - 2.5
MGE	100LB-JA		2.2	4.3 - 3.6
MGE	100LD-JA		3	5.8 - 4.6
MGE	112ME-JA	3 × 380-480 V	4	7.7 - 6.0
MGE	132SG-JA		5.5	10.5 - 8.40
MGE	132MH-JA		7.5	14.1 - 11.1
MGE	160MD-K		11	20.2 - 16.4
MGE	160LE-K		15	26.7 - 21.8
MGE	180MF-K		18.5	33.2 - 26.9
MGE	180LG-K		22	39.2 - 31.5

Pump dimensions with other motors

The tables below show changes of pump dimensions when using other motors than the standard motors listed in section Dimensional drawings and dimensions.

IE class	Motor
IE3/IE4	Siemens

Example

If a 2-pole, 3 kW Siemens motor, class IE3, is selected, the LL dimension will be 9 mm bigger.

IE3**IE3, Siemens, 2-pole**

P2 [kW]			Motors on data pages		Other motors		L/LB	H	h4/AD	AG	LL	P	A	B	C	K	Weight [kg]
50 Hz	60 Hz	Motor	Frame size	Motor	Frame size	[mm]								NK	NB		
0.75	0.75	MG-H3	80A	Siemens IE3	80M	21	0	12	11	-3	0	0	0	0	-0.5	3	
1.1	1.1	MG-H3	80C	Siemens IE3	80M	1	0	12	11	-3	0	0	0	0	-0.5	3	
1.5	1.5	MG-H3	90S	Siemens IE3	90S	16	0	16	-69	-24	0	0	0	0	0	-1	
2.2	2.2	MG-H3	90L	Siemens IE3	90L	-24	0	16	-69	-24	0	0	25	0	0	0	
3	3	MG-H3	100L	Siemens IE3	100L	35.5	0	46	-27	9	0	0	0	0	0	3	
4	4	MG-H3	112M	Siemens IE3	112M	-18	0	43	-67	9	0	0	0	0	0	-8	
5.5	5.5	MG-H3	132S	Siemens IE3	132S	-6	0	68	-47	27	0	0	0	0	0	3	
7.5	7.5	MG-H3	132S	Siemens IE3	132S	56	0	43	-48	-5	0	0	0	0	0	6	
11	11	MG-H3	160M	Siemens IE3	160M	23	0	32.5	-68	-68	0	0	0	0	0	-11	
15	15	MG-H3	160M	Siemens IE3	160M	23	0	32.5	-68	-68	0	0	0	0	0	-14	
18.5	18.5	MG-H3	160L	Siemens IE3	160L	39	0	32.5	-68	-68	0	0	0	0	0	-18	
22	22	MG-H3	180M	Siemens IE3	180M	17	0	82	-54	-49	0	0	0	0	43	35	

Note: The dimensions L and h4 refer to NKG pumps, LB and AD to NBG pumps.

IE3, Siemens, 4-pole

P2 [kW]			Motors on data pages		Other motors		L/LB	H	h4/AD	AG	LL	P	A	B	C	K	Weight [kg]
50 Hz	60 Hz	Motor	Frame size	Motor	Frame size	[mm]								NK	NB		
0.75	0.75	MG-H3	90S	Siemens IE3	80	-29	-10	11	-69	-24	0	-15	0	-6	-0.5	-4	
1.1	1.1	MG-H3	90S	Siemens IE3	90S	16	0	16	-69	-24	0	0	0	0	0	-4.3	
1.5	1.5	MG-H3	90L	Siemens IE3	90L	-24	0	16	-69	-24	0	0	0	0	0	-3.7	
2.2	2.2	MG-H3	100L	Siemens IE3	100L	35.5	0	46	-27	9	0	0	0	0	0	8	
3	3	MG-H3	100L	Siemens IE3	100L	35.5	0	46	-27	9	0	0	0	0	0	3	
4	4	MG-H3	112M	Siemens IE3	112M	-18	0	43	-67	9	0	0	0	0	0	-9	
5.5	5.5	MG-H3	132S	Siemens IE3	132S	56	0	43	-48	-5	0	0	0	0	0	8	
7.5	7.5	MG-H3	132M	Siemens IE3	132M	6	0	43	-48	-5	0	0	-38	0	0	-4	
11	11	MG-H3	160M	Siemens IE3	160M	-51	0	32.5	-68	-68	0	0	-44	0	0	-12	
15	15	MG-H3	160L	Siemens IE3	160L	-21	0	32.5	-68	-68	0	0	0	0	-17	-14	

Note: The dimensions L and h4 refer to NKG pumps, LB and AD to NBG pumps.

21. Vortex impeller range

Super Vortex impellers in NBG, NKG pumps



This section describes technical details on where the NBG, NKG pump with Super Vortex impeller differs from the standard NBG, NKG pump with a closed impeller. Other technical details which are not mentioned in this section are shared with those for the NBG, NKG with a closed impeller.

Applications

Introduction

The NBG/NKG Super Vortex impeller pump is designed for dry installation with the purpose to minimize the risk of blocking when handling wastewater, process water and swarf and thereby covers most applications containing dirty liquids.

The Super Vortex impeller provides passage for long fibres and solids up to 25 mm and is suitable for wastewater with a dry matter content of up to 5 %.

The Super Vortex design is suitable for these application types:

- washing and cleaning in Automotive and Food & Beverage industry (F&B)
- machining in Automotive and Metal industry
- processing in oils and fat application in F&B
- textile industry

- wastewater treatment in Textile, Automotive, Pulp & Paper
- industrial water reuse.

ATEX

The NKG pumps with SuperVortex impeller is suited for ATEX (Ex) applications when combined with either Grundfos Back to Back Double seal, or Burgman Cartex double seal solution.

The pump must be installed with the shaft seal arrangement containing pressurized barrier fluid to enable the protection of the shaft seal from getting in contact with hazards from the pumped liquid.

The NBG pumps with SuperVortex impeller is **not** suited for ATEX (Ex) applications.

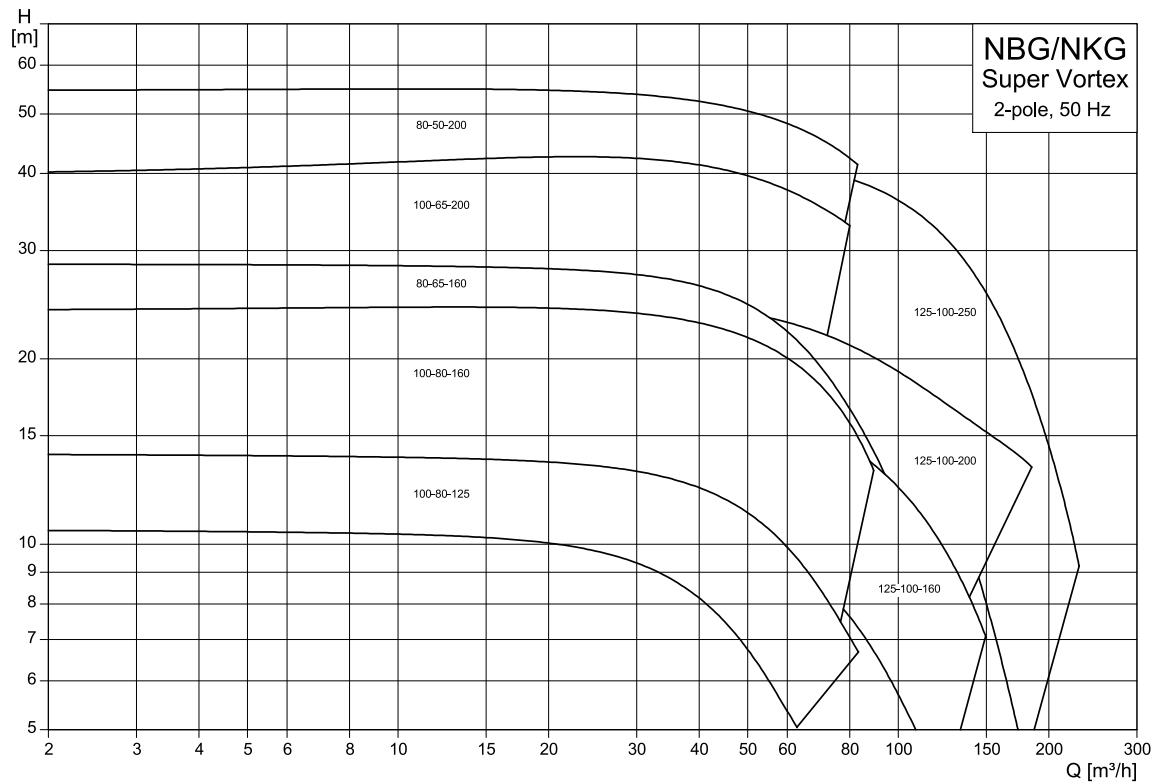
Features and benefits

NBG and NKG pumps with Super Vortex impellers offer the following features and benefits:

- The pumps are non-self-priming, single-stage, centrifugal volute pumps with axial inlet port, radial outlet port and horizontal shaft.
- Design is according to ISO 5199.
- Inlet and outlet flanges are according to EN 1092-2.
- Dimensions are according to ISO 2858 (16 bar).
- PN 16 (16 bar) & PN 25 (25 bar) range available in 1.4408 and 1.4517 execution.
- The mechanical shaft seal has dimensions according to EN 12756.
- The pumps offer flow rates from 2 to 250 m³/h and heads from 2 to 60 m.
- The pumps can be equipped with an MGE motor with integrated frequency converter or connected to a Grundfos CUE external frequency converter.
- All pumps are statically balanced according to ISO 1940-1 class 6.3.
- Impellers are hydraulically balanced.

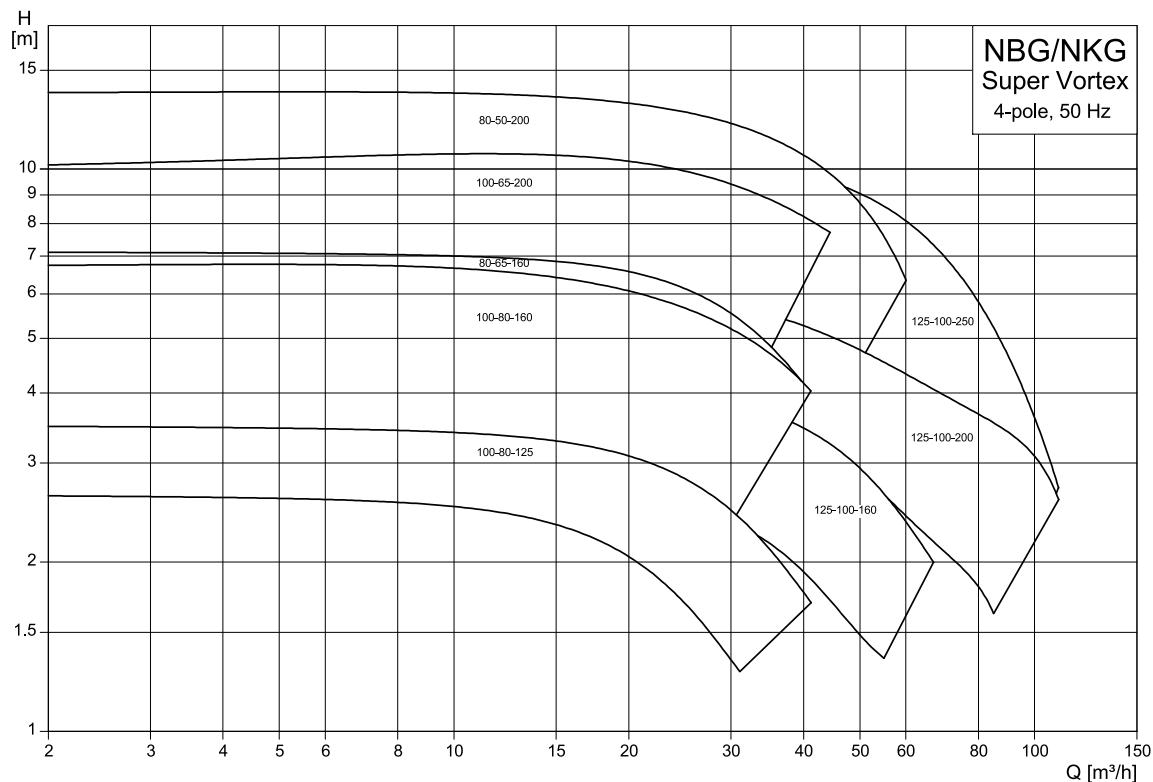
NBG/NKG Super vortex, Performance range

NBG/NKG, 2-pole



TM1040584

NBG/NKG, 4-pole



TM1040585

Product range

The tables on the following pages show the complete product ranges of NBG/E and NKG/E pumps with Super Vortex impellers. The standard range has been combined on the basis of the following parameters:

Pump

- Pump housings have outlet flanges from DN 65 to DN 100.
- Cast iron pumps have fixed flanges.
- Stainless 1.4408 & Duplex Stainless 1.4517 pumps have loose flanges.

Standard Grundfos motor

- Motors are for 50Hz.
- NBG and NKG pumps are available with IE3, 2- and 4-pole motors as standard.
- Motor with power rating up to and including 4 kW are available for "low voltage" execution; motors from 2.2 kW are available for "high voltage".
- All pumps with standard motor can be connected to an external frequency converter either Grundfos CUE or other external drives.

Grundfos MGE motor

- NBGE and NKGE pumps are available with Grundfos IE5 MGE motor with integrated frequency converter.
- MGE motors are available in 3 speed versions:
 - Low speed up to 2000 RPM (0.55 - 1.5 kW)
 - Low speed up to 2200 RPM (2.2 - 22 kW)
 - Medium speed up to 4000 RPM (1.1 - 22 kW)

Maximum particle size

Depending on pump model the Vortex impeller pumps can handle different maximum sizes of particles.

Model	d5	Trim	Particle size diameter
100-80-125	24	144	20
80-65-160	24	158; 171	20
80-50-200	24	183; 199; 215	20
100-65-200	32	183; 199	20
100-80-160	32	158; 171	20
125-100-160	32	144; 158; 171	20
125-100-200	32	183; 199; 215	25
125-100-250	42	230; 255; 267; 275	25

2-pole

Pump type	P2 [kW]	50Hz, 2-pole		NBG, NKG - Standard range								Options			
				NBG				NKG				Bearing bracket	Pump	Motor	
		NBGE/ NKGE		Cast iron	Duplex Stainless steel	Cast iron	Duplex Stainless steel	Heavy duty (HD) bearing design		Lubrication type		Special seals	Special motor brand	Special voltage	Insulated bearings for VFD operation
		PN 16	Flange mounting ⁵⁶⁾	C, S, T	Pump material codes	I, K, L, M, U	Pump material codes	Flange standard ⁵⁷⁾	I, K, L, M	Flange standard ⁵⁷⁾	Pump material codes	Flange standard ⁵⁸⁾	Re-grease	Oil	
80-65-160/158	5.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
80-65-160/171	11	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
80-50-200/183	2.2	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
80-50-200/199	3	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
80-50-200/215	4	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
100-80-125/144	7.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
100-80-160/158	11	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
100-80-160/171	15	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
100-65-200/183	11	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
100-65-200/199	15	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-160/158	7.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-160/171	11	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-200/183	11	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-200/199	15	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-200/215	22	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-250/230	18.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-250/255	30	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •
125-100-250/275	37	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	• -	□	□	• • • •

⁵⁶⁾ F = Fixed flange; L = Loose flange⁵⁷⁾ DIN flange machining; G = ANSI flange machining; J = JIS flange machining⁵⁸⁾ Standard bearing bracket with greased for life bearings⁵⁹⁾ Heavy duty bearing bracket, re-greasable or oil lubricated bearings⁶⁰⁾ □ = Optional; ■ = Standard

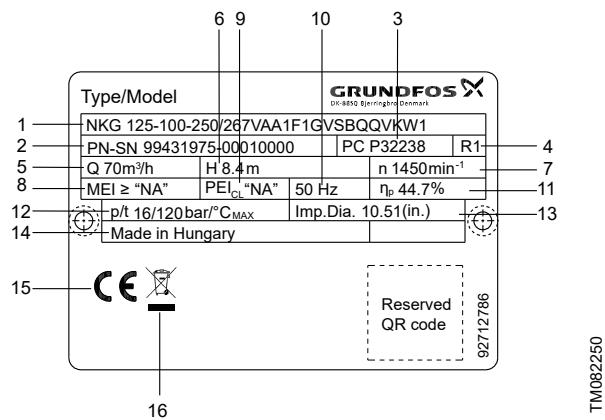
4-pole

Pump type	P2 [kW]	50Hz, 4-pole		NBG, NKG - Standard range								Options		
				NBG				NKG				Bearing bracket	Pump	Motor
		NBGE/ NKGE		Cast iron	Duplex Stainless steel	Cast iron	Duplex Stainless steel	Heavy duty (HD) bearing design	Special seals	Special motor brand	Special voltage	Insulated bearings for VFD operation		
		No sensor	Integrated sensors	PN16	Flange mounting ⁶¹⁾	C, S, T	Pump material codes	Flange standard ⁶²⁾				Lubrication type		
80-65-160/158	0.75	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
80-65-160/171	1.1	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
80-50-200/183	1.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
80-50-200/199	2.2	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
80-50-200/215	3	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
100-80-125/144	0.55	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
100-80-160/158	0.75	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
100-80-160/171	1.1	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
100-65-200/183	1.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
100-65-200/199	2.2	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-160/158	1.1	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-160/171	1.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-200/183	1.5	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-200/199	2.2	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-200/215	3	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-250/230	2.2	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-250/255	3	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•
125-100-250/267	4	•	-	F F	•	L F/G/J	•	F F	•	L F/G/J	•	•	•	•

⁶¹⁾ F = Fixed flange; L = Loose flange⁶²⁾ DIN flange machining; G = ANSI flange machining; J = JIS flange machining⁶³⁾ Standard bearing bracket with greased for life bearings⁶⁴⁾ Heavy duty bearing bracket, re-greaseable or oil lubricated bearings⁶⁵⁾ □ = Optional; ■ = Standard

Identification

Nameplate



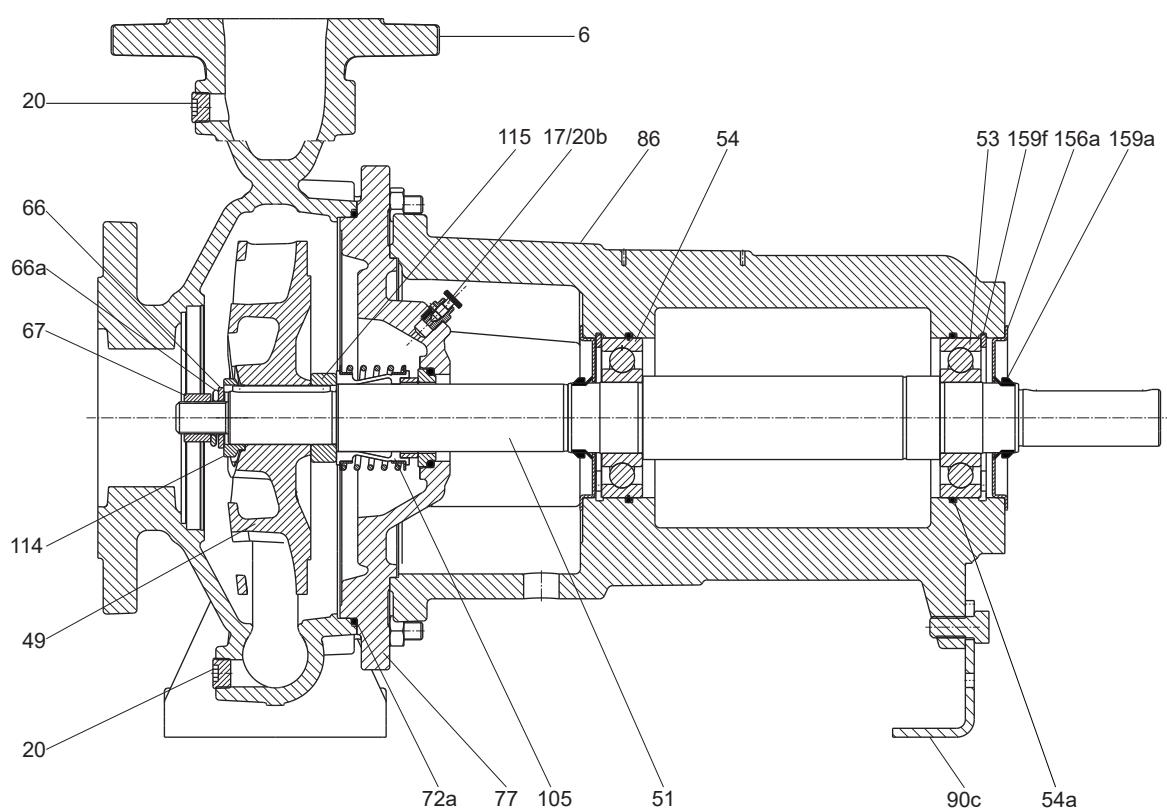
TM082250

Example of NKG pump with Super Vortex impeller

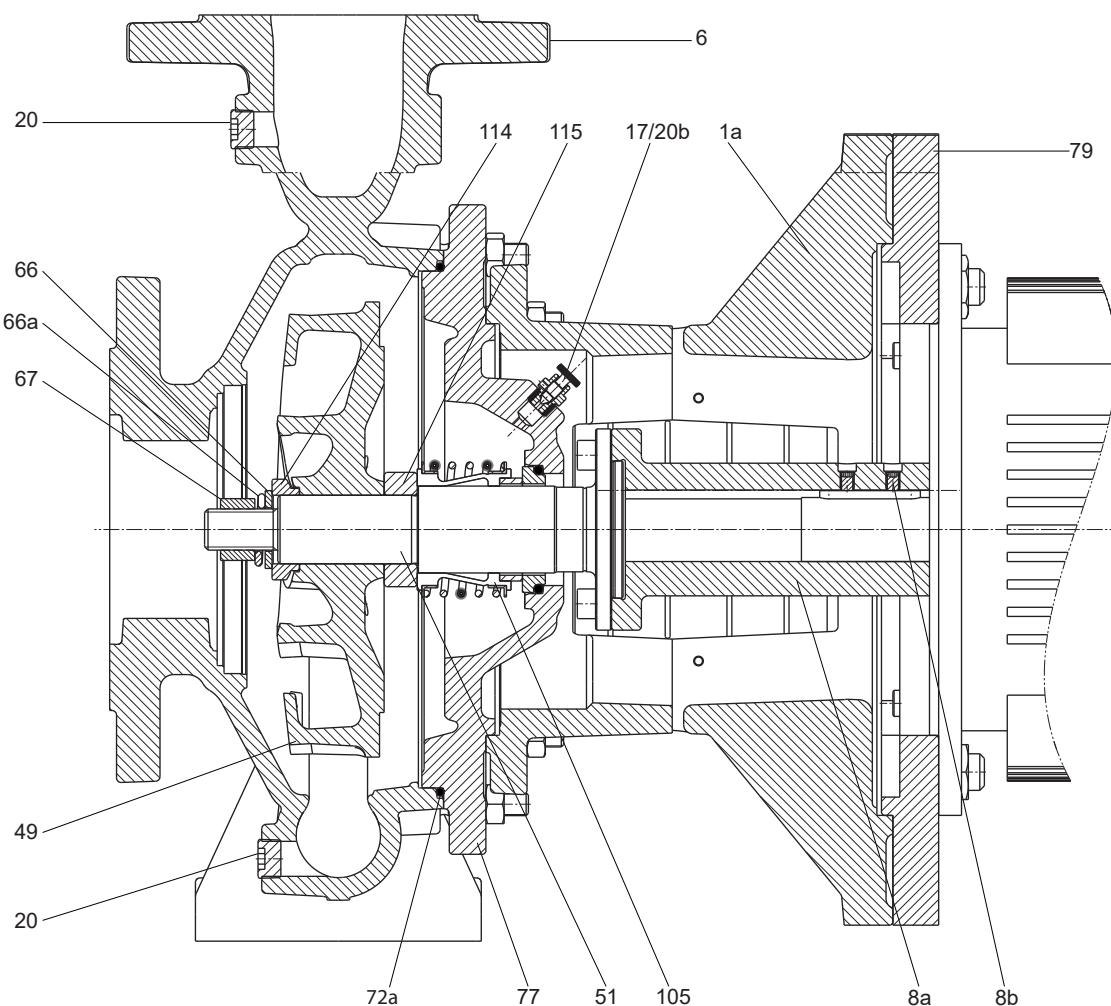
Pos.	Description
1	Type designation
2	Identification code
99431975	Product number
00010000	Serial number
3	Production code - production site, year and week
4	Range identification (service range code)
5	Nominal flow rate
6	Nominal pump head
7	Rated pump speed
8	Minimum efficiency index (MEI)
9	Pump Energy Index (PEI), constant load
10	Frequency
11	Hydraulic pump efficiency
12	Pressure rating and maximum temperature
13	Actual impeller diameter
14	Country of origin
15	CE mark
16	EU/WEEE mark

Construction

NKG-Vortex



TM082318

NBG-Vortex

TM082319

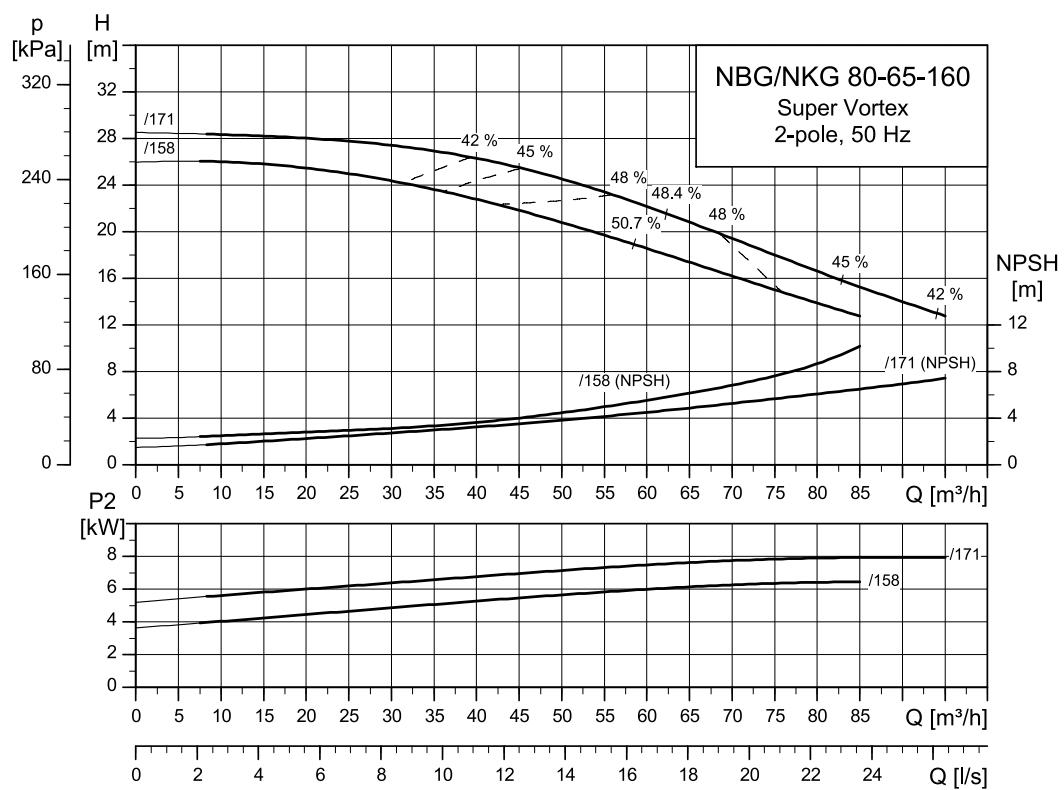
Pos.	Description
1a	Motor stool
6	Pump housing
8a	Motor shaft bushing
8b	Set screw - motor shaft bushing
17	Air vent
20	Plug
20b	Plug
49	Impeller
51	Shaft
53	Bearing, NED
54	Bearing, DE
54a	O-ring
66	Washer
66a	Lock washer
67	Impeller nut

Pos.	Description
72a	O-ring
77	Cover
79	Adapter flange
86	Bearing bracket
90c	Bearing bracket foot
105	Shaft seal
114	Front side spacer ring
115	Back side spacer ring
156a	Cover, bearing bracket
159a	V-ring
159f	Retaining ring

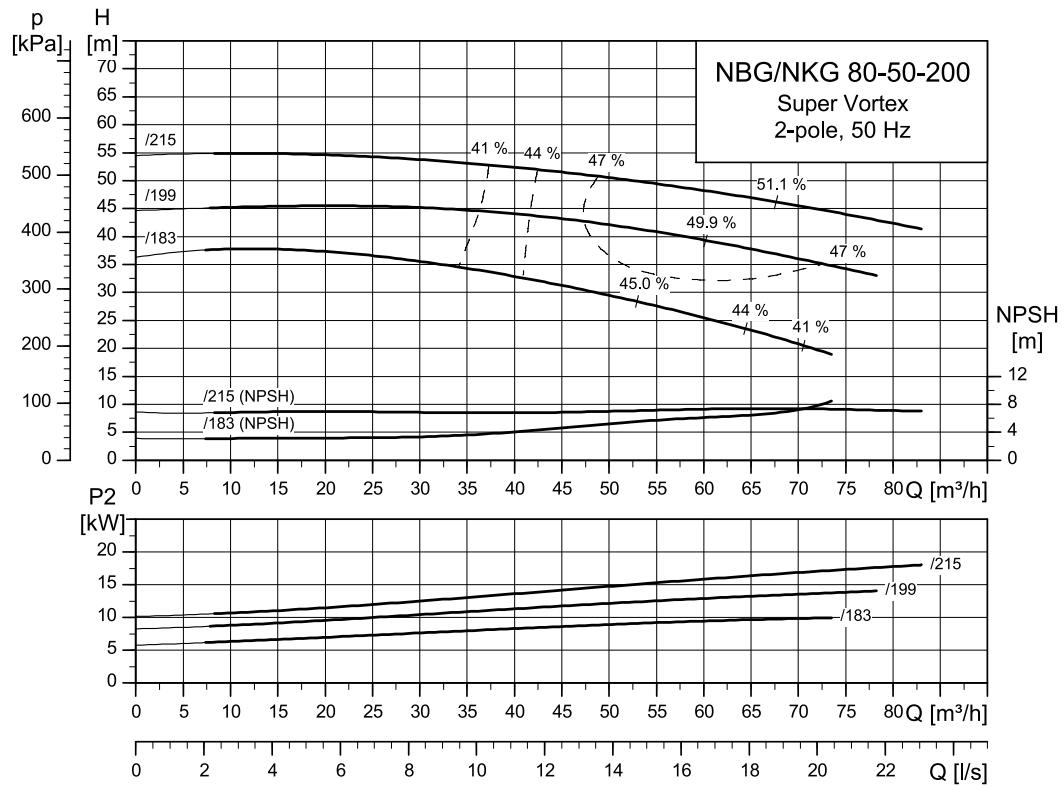
NBG/NKG Super vortex, Performance curve

Overview

Pump size	2-pole	4-pole
NBG/NKG 80-65-160	See 80-65-160	See 80-65-160
NBG/NKG 80-50-200	See 80-50-200	See 80-50-200
NBG/NKG 100-80-125	See 100-80-125	See 100-80-125
NBG/NKG 100-80-160	See 100-80-160	See 100-80-160
NBG/NKG 100-65-200	See 100-65-200	See 100-65-200
NBG/NKG 125-100-160	See 125-100-160	See 125-100-160
NBG/NKG 125-100-200	See 125-100-200	See 125-100-200
NBG/NKG 125-100-250	See 125-100-250	See 125-100-250

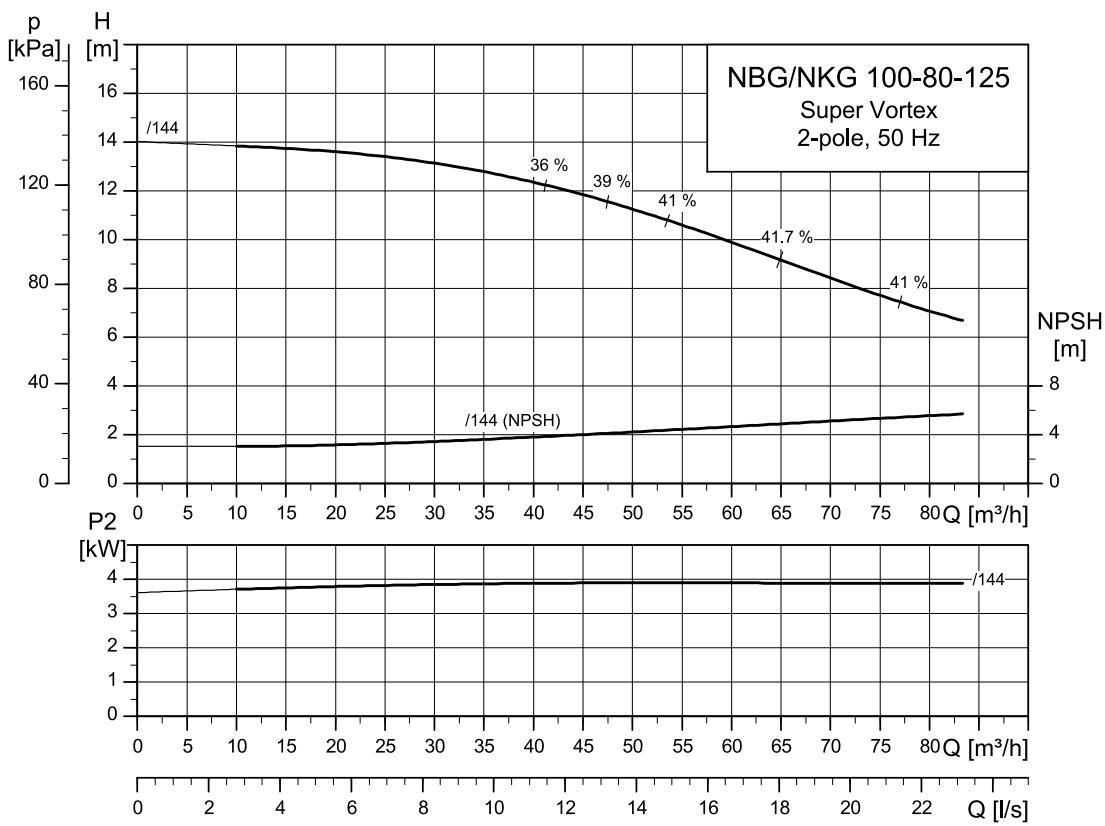
2-pole**80-65-160**

TM1040542

80-50-200

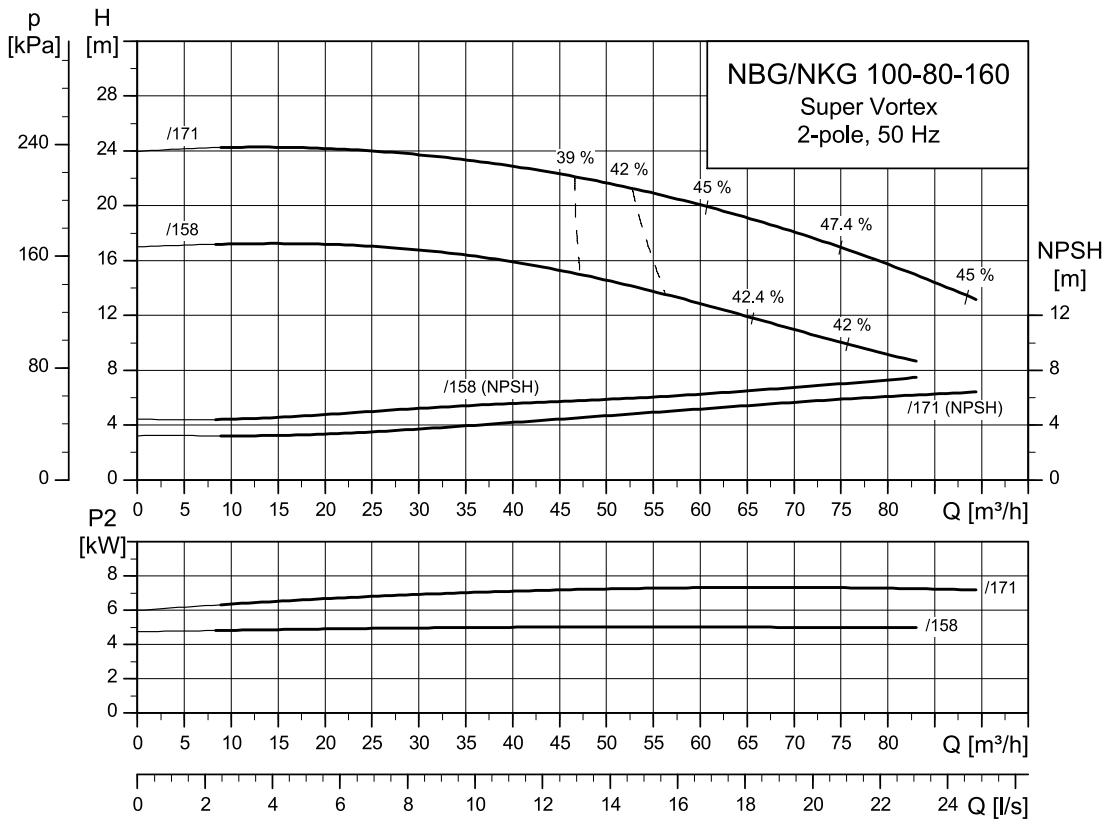
TM1040543

100-80-125



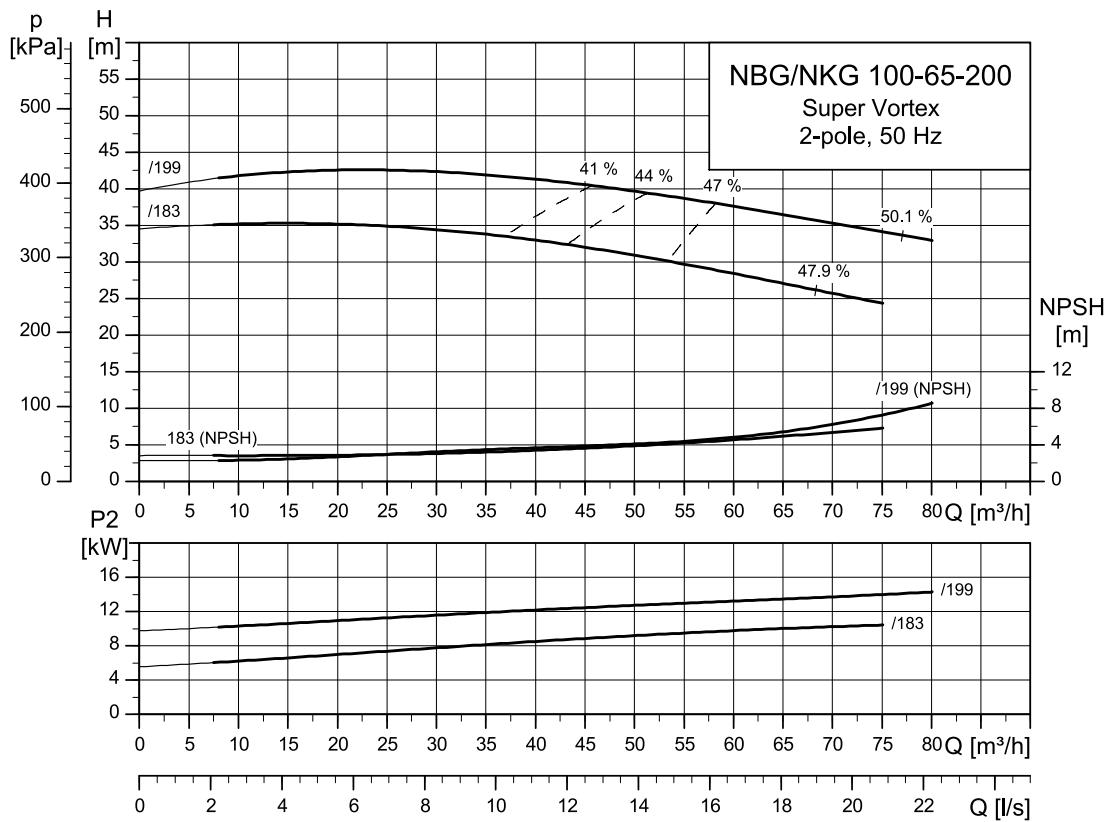
TM1040545

100-80-160



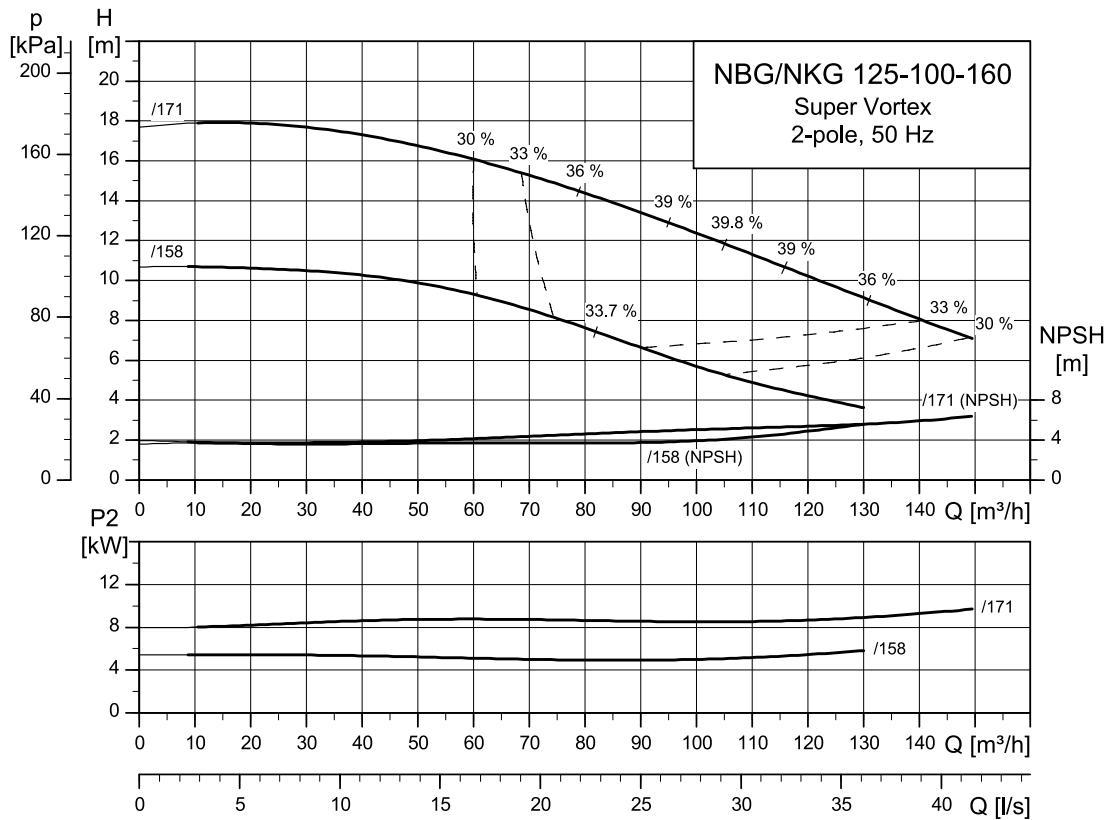
TM1040546

100-65-200



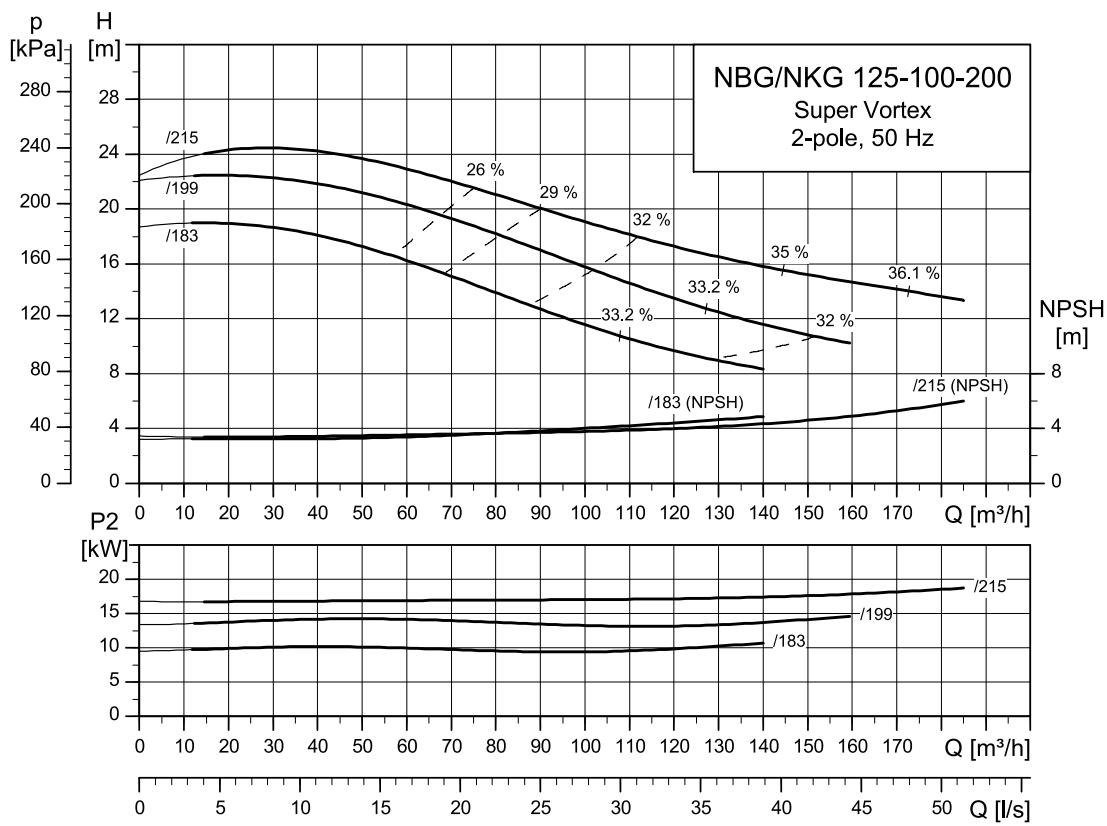
TM1040544

125-100-160



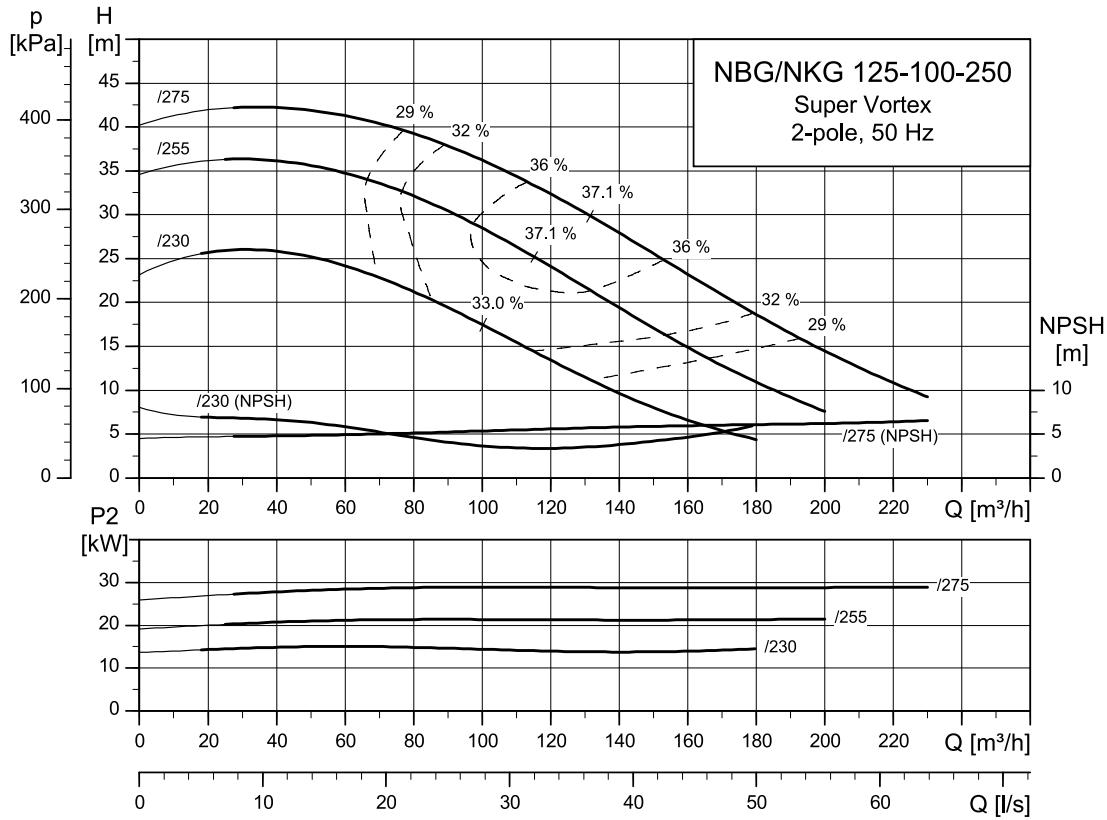
TM082709

125-100-200

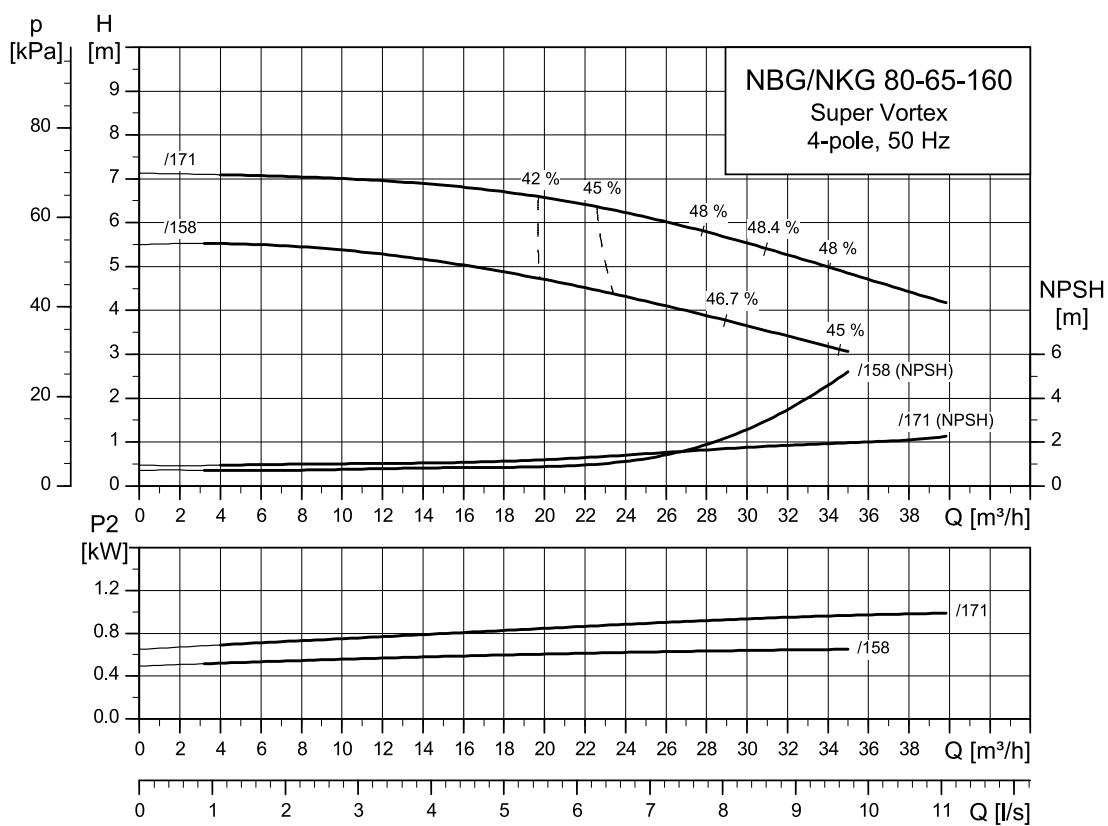


TM002710

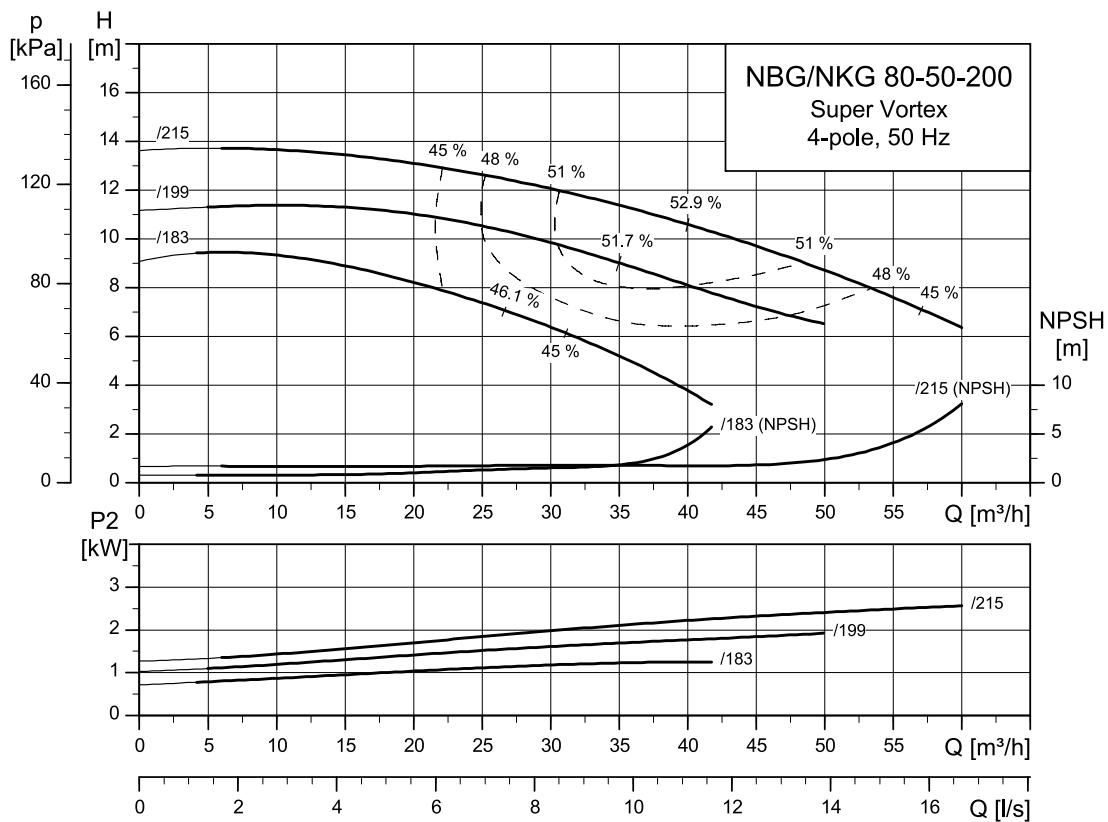
125-100-250



TM1040547

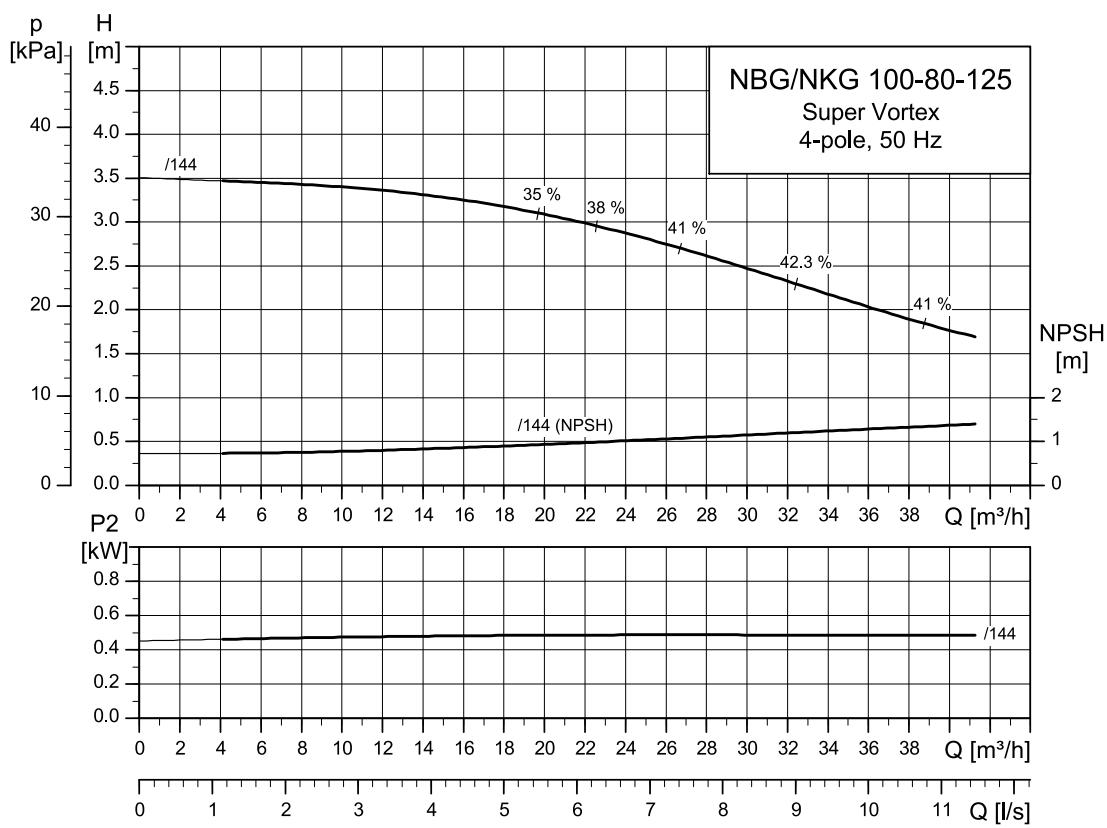
4-pole**80-65-160**

TM1040548

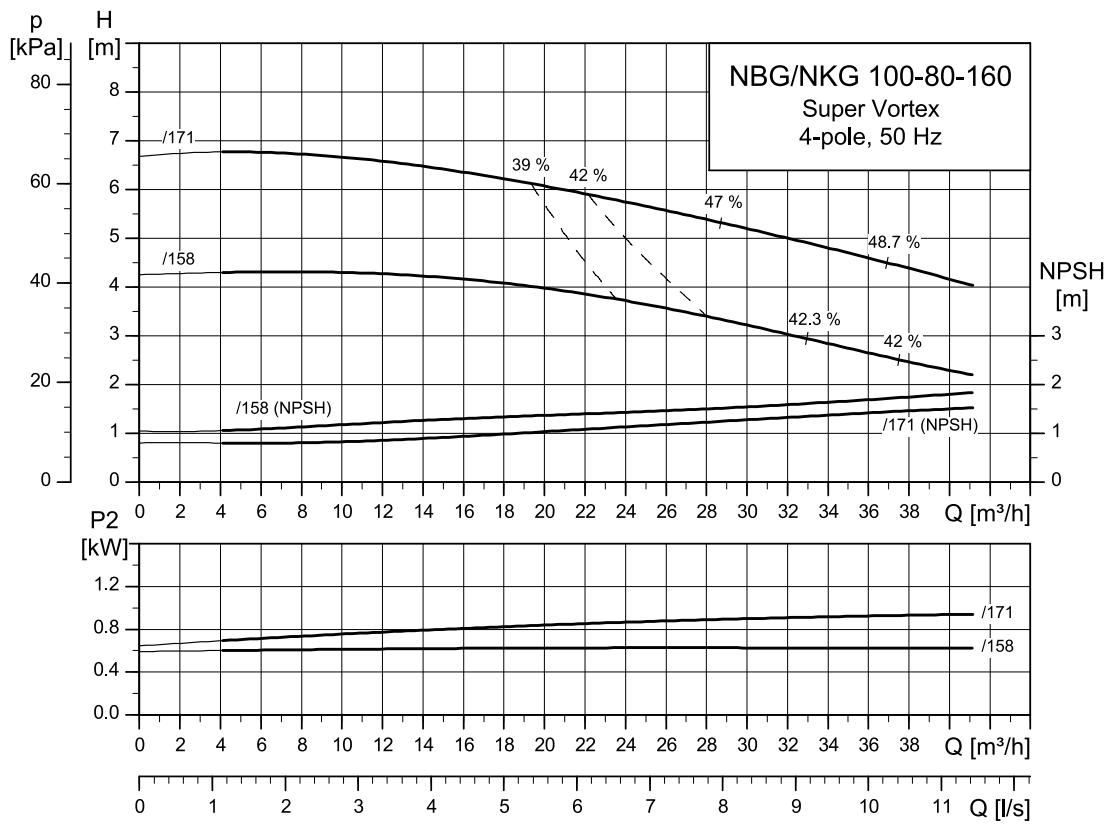
80-50-200

TM1040549

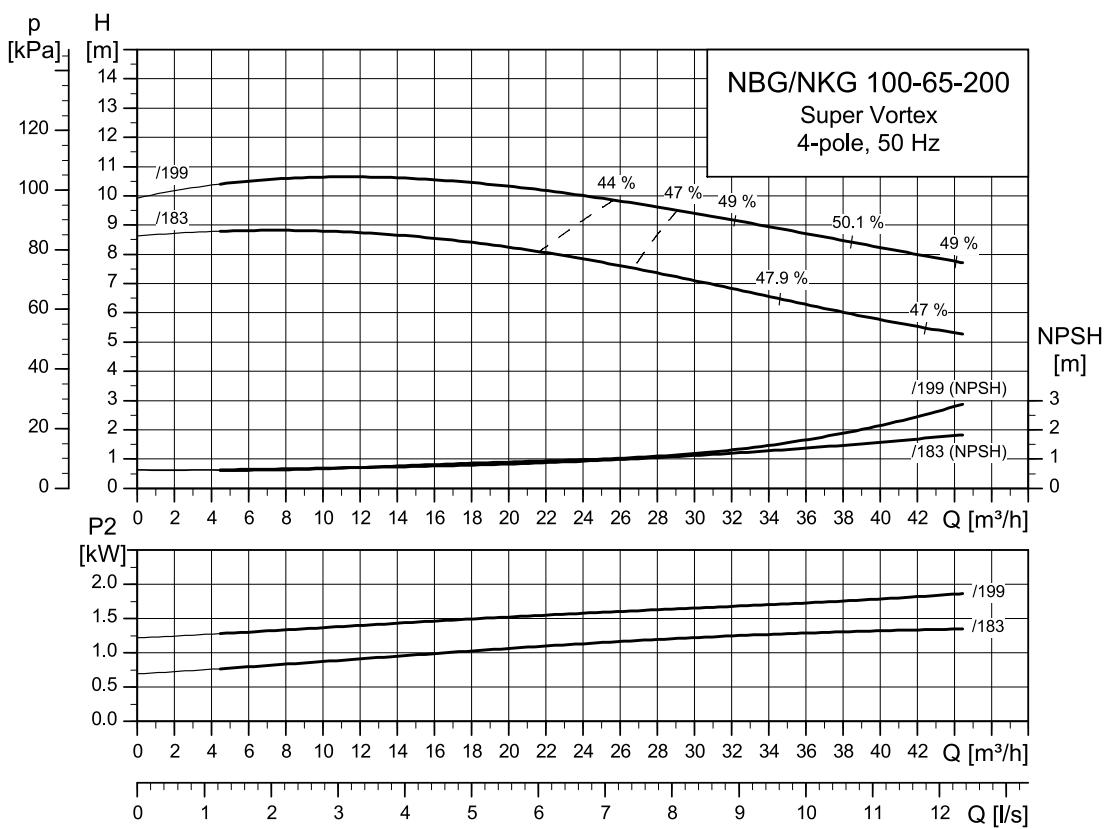
100-80-125



100-80-160



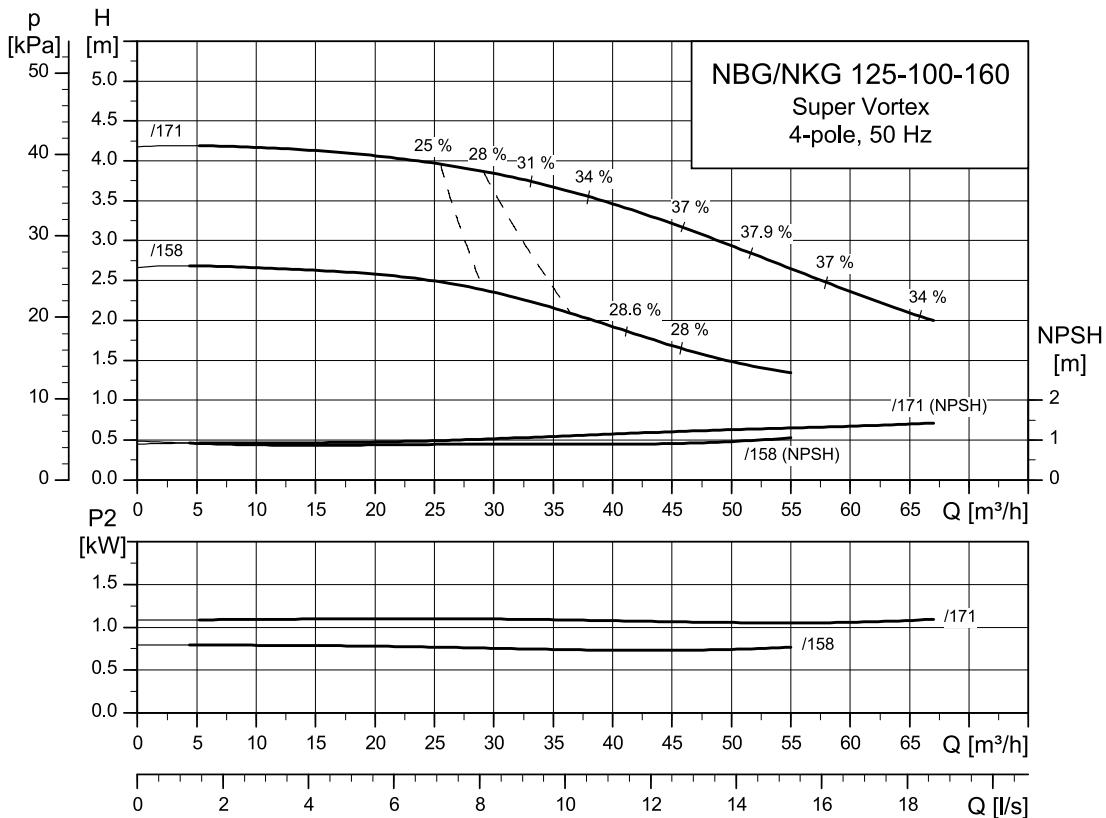
100-65-200



TM1040550

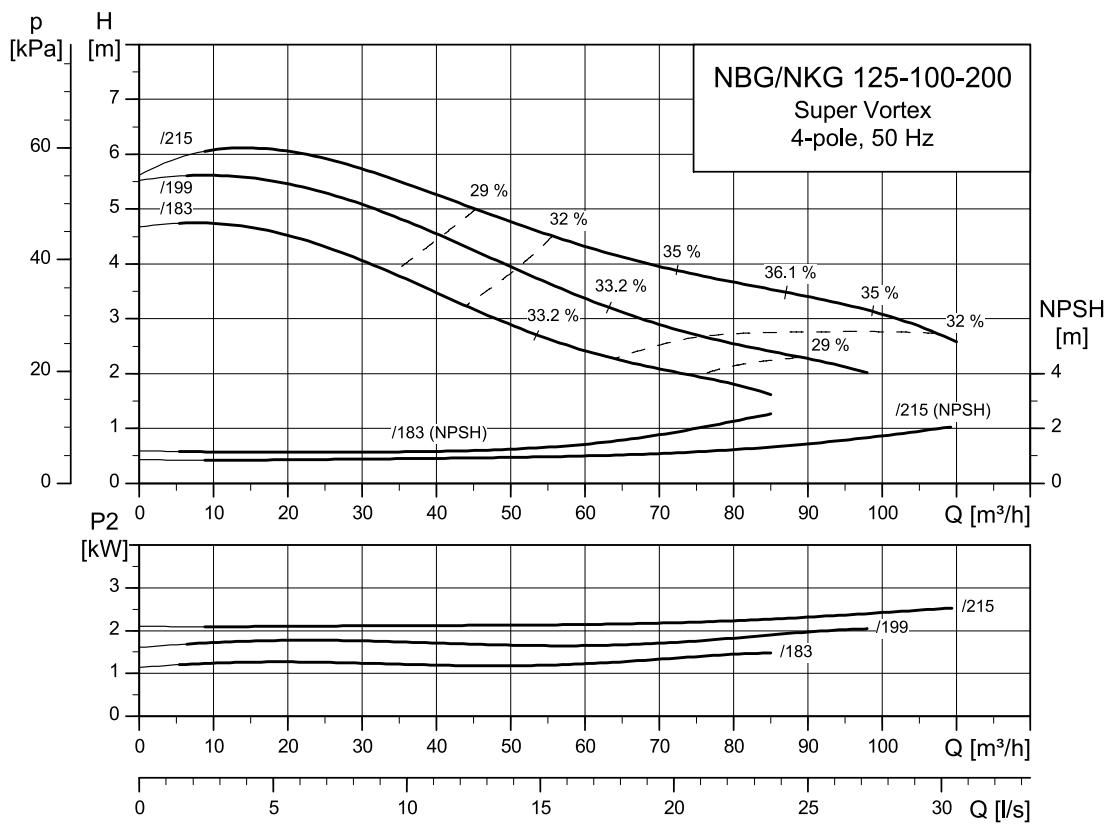
Vortex impeller range

125-100-160



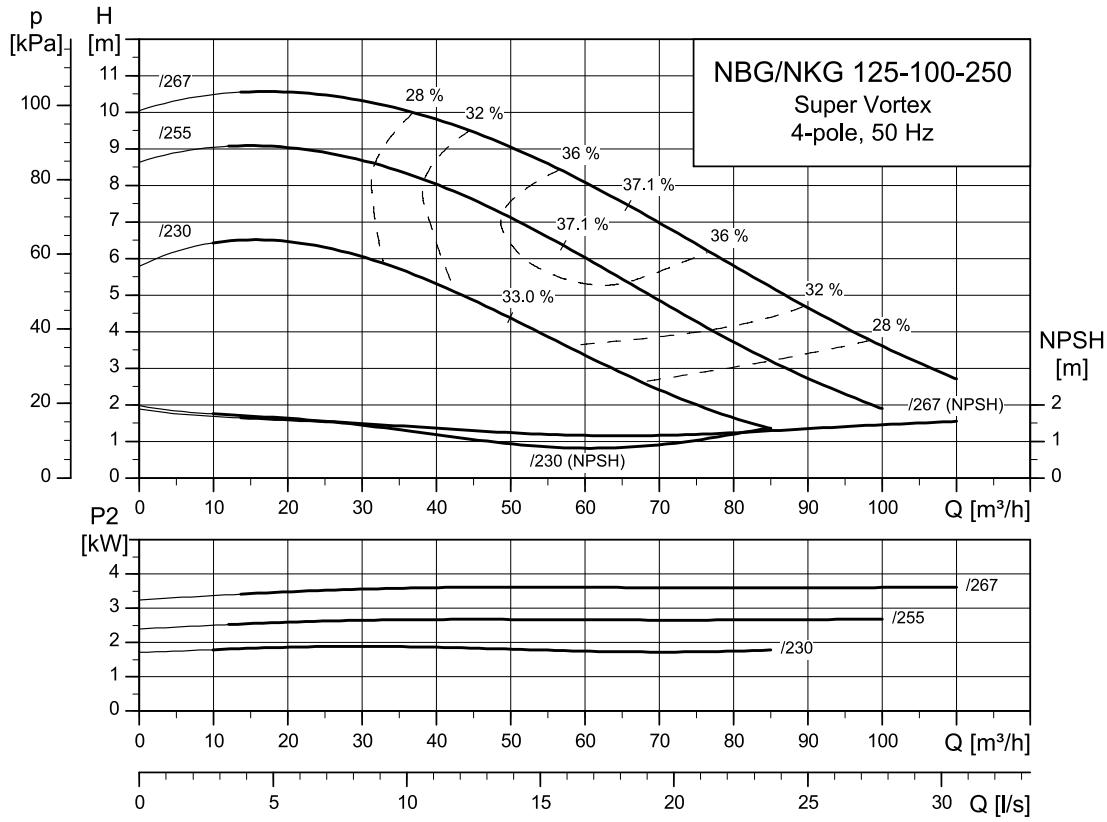
TM082711

125-100-200



TM082712

125-100-250



TM1040553






22. Accessories







Counter-flange






Cast iron pumps

Counter-flanges for cast iron NBG, NBGE and NKG, NKGE pumps are made of steel.

A set consists of one counter-flange, one gasket of asbestos-free material and the requisite number of bolts and nuts.

Counter-flange	Flange size	Description	Rated pressure [bar] EN 1092-2	Pipe connection	Product number
	DN 32	Threaded For welding	10/16	Rp 1 1/4 32 mm	419901 419902
	DN 40	Threaded For welding	10/16	Rp 1 1/2 40 mm	429902 429901
	DN 50	Threaded For welding	10/16	Rp 2 50 mm	339903 339901
	DN 65	Threaded For welding	10/16	Rp 2 1/2 65 mm	349902 349904
	DN 80	Threaded For welding	10/16	Rp 3 80 mm	350540 350541






Counter-flange	Flange size	Description	Rated pressure [bar] EN 1092-2	Pipe connection	Product number
	DN 100	Threaded	10/16	Rp 4	369901
	DN 125	For welding	10/16	125 mm	369902
	DN 150	For welding	10/16	150 mm	96414677
	DN 200	For welding	10	200 mm	96413358
	DN 200	For welding	16	200 mm	96691093
	DN 250	For welding	10	250 mm	99457575





Counter-flange	Flange size	Description	Rated pressure [bar] EN 1092-2	Pipe connection	Product number
	DN 250	For welding	16	250 mm	96890361
	DN 300	For welding	10	300 mm	99457580
	DN 300	For welding	16	300 mm	96890401
	DN 350	For welding	10	350 mm	99457581
	DN 350	For welding	16	350 mm	99457633

Stainless steel pumps

Counter-flanges for stainless steel NBG, NBGE and NKG, NKGE pumps are made of stainless steel according to EN 1.4401 (AISI 316).

A set consists of one counter-flange, one gasket of asbestos-free material and the requisite number of bolts and nuts.

Counter-flange	Flange size	Description	Rated pressure [bar] EN 1092-2	Pipe connection	Product number
 TM030400	DN 32	Threaded For welding	10/16	Rp 1 1/4	415304
 TM030401	DN 40	Threaded For welding	10/16	Rp 1 1/2	425245
 TM030402	DN 50	Threaded For welding	10/16	Rp 2	335254
 TM030403	DN 65	Threaded For welding	10/16	Rp 2 1/2	349910
 TM032117	DN 80	Threaded For welding	10/16	Rp 3	350543

Counter-flange	Flange size	Description	Rated pressure [bar] EN 1092-2	Pipe connection	Product number
	DN 100	Threaded For welding	10/16	Rp 4	369904
	DN 125	For welding	10/16	125 mm	369903
	DN 150	For welding	10/16	150 mm	96694017
	DN 200	For welding	16	200 mm	98052936

Sensors

Grundfos vortex flow sensor, VFI ⁶⁶⁾	Type	Flow range [m ³ /h]	Pipe connection	O-ring		Connection type	Product number
				EPDM	FKM		
• Sensor tube with sensor Sensor tube of 1.4408 and sensor of 1.4404	VFI 1.3-25 DN32 020 E	1.3 - 25	DN 32	●	●		97686141
	VFI 1.3-25 DN32 020 F				●	●	97686142
	VFI 1.3-25 DN32 020 E			●		●	97688297
	VFI 1.3-25 DN32 020 F				●	●	97688298
	VFI 2-40 DN40 020 E			●	●		97686143
	VFI 2-40 DN40 020 F				●	●	97686144
	VFI 2-40 DN40 020 E			●		●	97688299
	VFI 2-40 DN40 020 F				●	●	97688300
	VFI 3.2-64 DN50 020 E			●	●		97686145
	VFI 3.2-64 DN50 020 F				●	●	97686146
• 2 flanges	VFI 3.2-64 DN50 020 E	2-64	DN 50	●	●		97688301
	VFI 3.2-64 DN50 020 F				●	●	97688302
	VFI 5.2-104 DN65 020 E			●	●		97686147
	VFI 5.2-104 DN65 020 F				●	●	97686148
	VFI 5.2-104 DN65 020 E			●		●	97688303
	VFI 5.2-104 DN65 020 F				●	●	97688304
	VFI 8-160 DN80 020 E			●	●		97686149
	VFI 8-160 DN80 020 F				●	●	97686150
	VFI 8-160 DN80 020 E			●		●	97688305
	VFI 8-160 DN80 020 F				●	●	97688306
• 5 m cable with M12 connection in one end	VFI 12-240 DN100 020 E	5.2 - 104	DN 65	●	●		97686151
	VFI 12-240 DN100 020 F				●	●	97686152
	VFI 12-240 DN100 020 E			●		●	97688308
	VFI 12-240 DN100 020 F				●	●	97688309
	VFI 12-240 DN100 020 F				●	●	97688309

66) For more information about the VFI sensor, see the "Grundfos direct sensors" data booklet, publication number 97790189.

Grundfos differential pressure sensor, DPI	Content of sensor kit	Data sheet product number ⁶⁷⁾	Pressure range [bar]	Product number
	1 sensor (7/16" connections), including 0.9 m screened cable	96985439	0 - 0.6	96611522
	1 original DPI bracket, for wall mounting	96985440	0 - 1.0	96611523
	1 Grundfos bracket, for mounting on motor screws for mounting of sensor on bracket and motor	96985441	0 - 1.6	96611524
	3 capillary tubes, short or long	96985463	0 - 2.5	96611525
	2 fittings (1/4" - 7/16")	96985464	0 - 4.0	96611526
	5 cable clips, black	96985465	0 - 6.0	96611527
	installation and operating instructions	96985466	0-10	96611550
	service kit instruction			

67) Enter the product number of the data sheet into Grundfos Product Center to view data for the sensor.

Note: Select the differential pressure sensor so that the maximum pressure of the sensor is higher than the maximum differential pressure of the pump.

External Grundfos sensors

Sensor	Type	Supplier	Measuring range [bar]	Transmitter output [mA]	Power supply [VDC]	Process connection	Product number
Pressure transmitter	RPI	Grundfos	0 - 0.6	4-20	12-30	G 1/2	97748907
			0 - 1.0				97748908
			0 - 1.6				97748909
			0 - 2.5				97748910
			0 - 4.0				97748921
			0 - 6.0				97748922
			0-12				97748923
			0-16				97748924

Sensor interface, SI 001 PSU ⁶⁸⁾	Description	Product number
	Grundfos Direct Sensors™, type SI 001 PSU, is an external power supply for the VFI, DPI and other transmitters with 24 VDC supply voltage. It is used when the cable between transmitter and controller is more than 30 metres long.	96915820


⁶⁸⁾ For more information about the PSU sensor interface, see the Installation and operating instructions "SI 001 PSU - sensor interface", publication number 96944355, or Quick guide, publication number 96944356.

Danfoss pressure sensor kit	Pressure range [bar]	Product number
• Connection: G 1/2 A (DIN 16288 - B6kt) • Electrical connection: Plug (DIN 43650)	0 - 2.5	96478188
	0-4	91072075
	0-6	91072076
	0-10	91072077
	0-16	91072078
• Pressure sensor, type MBS 3000, with 2 m screened cable • Connection: G 1/4 A (DIN 16288 - B6kt) • 5 cable clips, black • Fitting instructions PT (00400212)	0 - 2.5	405159
	0-4	405160
	0-6	405161
	0-10	405162
	0-16	405163

	Type	Supplier	Measuring range	Product number
Flowmeter	SITRANS F M MAGFLO MAG 5100 W	Siemens	1-5 m ³ /h (DN 25)	ID8285
Flowmeter	SITRANS F M MAGFLO MAG 5100 W	Siemens	3-10 m ³ /h (DN 40)	ID8286
Flowmeter	SITRANS F M MAGFLO MAG 5100 W	Siemens	6-30 m ³ /h (DN 65)	ID8287
Flowmeter	SITRANS F M MAGFLO MAG 5100 W	Siemens	20-75 m ³ /h (DN 100)	ID8288
Temperature sensor	TTA (0) 25	Carlo Gavazzi	0-25 °C	96432591
Temperature sensor	TTA (-25) 25	Carlo Gavazzi	-25 to +25 °C	96430194
Temperature sensor	TTA (50) 100	Carlo Gavazzi	50-100 °C	96432592
Temperature sensor	TTA (0) 150	Carlo Gavazzi	0-150 °C	96430195
Accessory for temperature sensor. All with 1/2 RG connection.	Protecting tube Ø9 x 50 mm	Carlo Gavazzi		96430201
	Protecting tube Ø9 x 100 mm	Carlo Gavazzi		96430202
	Cutting ring bush	Carlo Gavazzi		96430203
Temperature sensor, ambient temperature	WR 52	t _{mg} (DK: Plesner)	-50 to +50 °C	ID8295
Differential temperature sensor	ETSD	Honsberg	0-20 °C	96409362
Differential temperature sensor	ETSD	Honsberg	0-50 °C	96409363

Note: All sensors have 4-20 mA output signal.

Potentiometer



TM021630

Potentiometer for setpoint setting and start/stop of the pump.

Product	Product number
External potentiometer with cabinet for wall mounting	625468

Grundfos GO

Grundfos GO is used for wireless infrared or radio communication with the pumps.

MI 301

MI 301 is a module with built-in infrared and radio communication. Use MI 301 in conjunction with an Android or iOS-based smart devices with a Bluetooth connection. MI 301 has a rechargeable Li-ion battery and you must charge it separately.



TM053890

MI 301

Supplied with the product:

- Grundfos MI 301
- sleeve
- battery charger
- quick guide.

Product numbers

Grundfos GO variant	Product number
Grundfos MI 301	98046408

Supported units

Make	Model	Operating system	MI 301
Apple	iPod touch 4G	iOS 5.0 or later	•
	iPhone 4, 4S		•
	iPod touch 5G	iOS 6.0 or later	•
	iPhone 5		•
HTC	Desire S	Android 2.3.3 or later	•
	Sensation	Android 2.3.4 or later	•
Samsung	Galaxy S II		•
	Galaxy Nexus	Android 4.0 or later	•
LG	Google Nexus 4	Android 4.2 or later	•

Note: Similar Android and iOS-based devices may work as well, but are not supported by Grundfos.

CIU communication interface units



TM1040612

Grundfos CIU communication interface unit

The CIU units enable communication of operating data, such as measured values and setpoints, between E-pumps and a building management system. The CIU unit incorporates a 24-240 VAC/VDC power supply module and a CIM module. It can either be mounted on a DIN rail or on a wall.

We offer the following CIU units:

Description	Fieldbus protocol	Product number
CIU 100	LONworks for pumps	96753735
CIU 150	PROFIBUS DP	96753081
CIU 200	Modbus RTU	96753082
CIU 250 ⁶⁹⁾	GSM	96787106
CIU 270 ⁶⁹⁾	GRM	96898819
CIU 300	BACnet MS/TP	96893769
CIU 500	Ethernet, BACnet IP	
CIU 500	Ethernet, Modbus TCP	
CIU 500	Ethernet, PROFINET IO	96753894
CIU 500	Ethernet, GRM IP	
CIU 500	Ethernet, EtherNet/IP	
CIU 900	CIU box without CIM	99448387
CIU 901	CIU box with IO 270 only	99448389

⁶⁹⁾ Antenna not included. See section *Antennas and battery*.

For further information about data communication via CIU units and fieldbus protocols, see the CIU documentation available in Grundfos Product Center.

Related information

[Antennas and battery](#)

CIM communication interface modules



TM1040613

Grundfos CIM communication interface module

The CIM modules enable communication of operating data, such as measured values and setpoints, between E-pumps of up to 22 kW and a building management system. The CIM modules are add-on communication modules which are installed in the MGE terminal box.

Note: CIM modules must be installed by authorised personnel.

We offer the following CIM modules:

Product	Description	Product number
CIM 100	LONworks for pumps	96824797
CIM 110	LONworks for multipump	96824798
CIM 150	PROFIBUS DP	96824793
CIM 200	Modbus RTU	96824796
CIM 250 ⁷⁰⁾	GSM	96824795
CIM 260-EU ⁷⁰⁾	3G/4G cellular	99439302
CIM 260-US ⁷⁰⁾	3G/4G cellular	99439306
CIM 270 ⁷⁰⁾	GRM	96898815
CIM 280-EU ⁷⁰⁾	GiC/GRM 3G/4G	99439724
CIM 280-US ⁷⁰⁾	GiC/GRM 3G/4G	99439725
CIM 300	BACnet MS/TP	96893770
CIM 500	Ethernet, BACnet IP	
CIM 500	Ethernet, Modbus TCP	
CIM 500	Ethernet, PROFINET IO	98301408
CIM 500	Ethernet, GRM IP	
CIM 500	Ethernet, EtherNet/IP	

⁷⁰⁾ Antenna not included. See section *Antennas and battery*.

For further information about data communication via CIM modules and fieldbus protocols, see the CIM documentation available in Grundfos Product Center.

Related information

[Antennas and battery](#)

Antennas and battery

Description	Product number
Antenna for roof for CIM/CIU 250/270	97631956
Antenna for desk for CIM/CIU 250/270	97631957
Antenna (rod) 3G/4G for CIM 260/280	99043061
Antenna (puc) 3G/4G for CIM 260/280	99518079
CIM 250 battery	99499908

EMC filter

EMC (electromagnetic compatibility to EN 61800-3)

Motor [kW]		Emission/immunity
2-pole	4-pole	
0.37	0.37	
0.55	0.55	
0.75	0.75	Emission
1.1	1.1	Motors may be installed in residential areas (first environment), unrestricted distribution, corresponding to CISPR11, group 1, class B.
1.5	1.5	
2.2	2.2	Immunity
3.0	3.0	Motors fulfil the requirements for both the first and second environment.
4.0	4.0	
5.5	-	
7.5	-	
-	5.5	Emission
-	7.5	The motors are category C3, corresponding to CISPR11, group 2, class A, and may be installed in industrial areas (second environment).
11	11	
15	15	If equipped with an external Grundfos EMC filter, the motors are category C2, corresponding to CISPR11, group 1, class A, and may be installed
18.5	18.5	
22	-	in residential areas (first environment).




TM029198

EMC filter

The EMC filter for residential areas is available as a complete kit ready for installation.

Product	Product number
EMC filter (5.5 kW and 7.5 kW, 4-pole)	96041047
EMC filter (11-22 kW)	96478309

Shims



TM043264

Shim

Shims to adjust motor height when aligning pump and motor.

Product	Product number
Small case (180 pcs)	96659156
Large case (360 pcs)	96659157

Each case contains three types of shims:

Type 1: 55 x 50 mm (2.17 x 1.97 in), 15 mm (0.59 in) slot.

Type 2: 75 x 70 mm (2.95 x 2.76 in), 23 mm (0.91 in) slot.

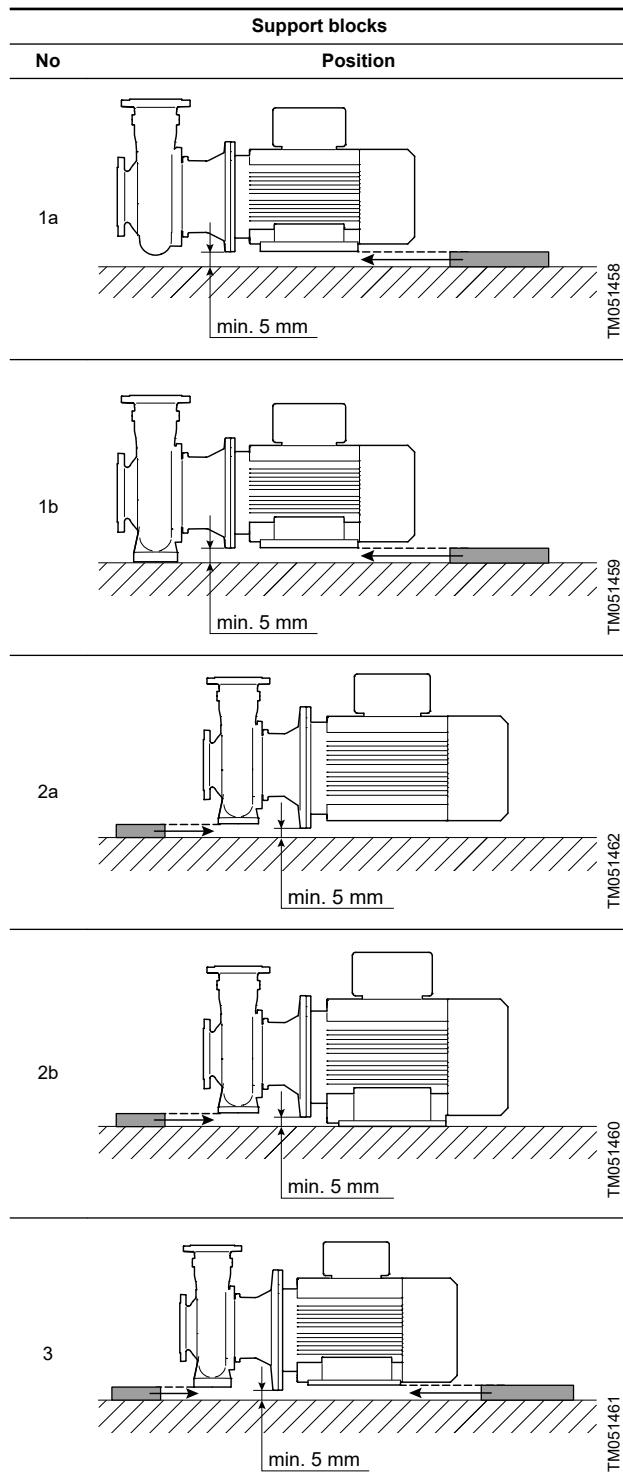
Type 3: 90 x 80 mm (3.54 x 3.15 in), 32 mm (1.26 in) slot.

Each type has ten of each of three sizes: 0.02; 0.028; 0.039 inch (0.5; 0.7; 1 mm).

A large case contains 20 of each of the above-mentioned shims. Refills can be found via service.

Support blocks

Steel support blocks are used to compensate for dimensional differences between pump housing and motor frame sizes. The support blocks can be fitted under the motor or pump housing feet during installation thus enabling horizontal alignment of the pump.



Key to support block number

No	Description
1a	Support blocks to be fitted under motor feet
1b	
2a	Support blocks to be fitted under pump housing feet
2b	
3	Support blocks to be fitted under both motor and pump housing feet

Base frames

As an additional feature a base frame for improving the installation is available. The base frame is placed between the foundation and the support blocks.

When ordering a base frame as an accessory, the relevant support blocks, bolts, nuts and washers for mounting of the pump on the base frame are always included. Bolts for mounting the base frame on the foundation are not included.

Product numbers

Information on the pump nameplate will indicate which support block number to choose.

The product numbers in the tables on the following pages refer to one support block. Therefore always order two of the product numbers in the list as the pump/motor needs to be supported on both sides.

Note: Bolts, washers and nuts are not supplied together with support blocks.

If the pump housing of your pump has feet and two options are indicated, choose the one with support blocks for the pump.

If your pump/motor combination is not in the list, contact your Grundfos Customer Service Unit (CSU).

NBG, 2-pole, 50 Hz

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷⁾		Support blocks for pump and/or motor are available for motors with X							
			Support block under pump	Support block under motor	E-motor		Standard motor					
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H		
					IE3	IE3	IE3	IE1	IE2	IE1	IE2	IE2 /IE3
50-32-125	3	137	95921105	-			x		x	x		x
50-32-160	5.5	157	95921105	-			x		x	x		x
50-32-200	11	185	95921105	95921003			x		x	x	x	x
50-32-250	11	185	95921107	95921003			x		x	x	x	x
50-32-250	15	185	95921107	95921003			x		x	x	x	
50-32-250	15	185	95921107	95921006								x
65-40-200	11	185	-	95921003			x		x	x	x	x
65-40-200	15	185	-	95921003			x		x	x	x	
65-40-200	15	185	-	95921006								x
65-40-250	11	185	-	95921003			x		x	x	x	x
65-40-250	15	185	-	95921003			x		x	x	x	
65-40-250	15	185	-	95921006								x
65-40-250	18.5	185	-	95921006			x		x	x	x	x
65-40-250	30	205	95921109	98042208			x					
65-40-250	30	205	-	98042208			x		x	x	x	x
65-40-315	22	200	-	95921005			x		x	x	x	x
65-40-315	22	260	98271138	95921056					x			
65-40-315	30	205	95921107	98042208			x		x	x	x	x
65-40-315	37	205	95921107	98042208			x		x	x	x	x
65-40-315	45	230	95921110	98042208			x		x	x	x	x
65-50-125	3	137	95921105	-			x		x	x		x
65-50-125	4	137	95921105	-			x		x	x		x
65-50-125	5.5	162	99715184	-		x	x		x	x		x
65-50-160	5.5	157	95921105	-			x		x	x		x
65-50-160	7.5	157	95921105	-			x		x	x		x
65-50-160	11	182	99715184	99715186		x	x		x	x	x	x
80-50-200	11	185	-	95921003			x		x	x	x	x
80-50-200	15	185	-	95921003			x		x	x	x	
80-50-200	15	185	-	95921006								x
80-50-200	18.5	185	-	95921006			x		x	x	x	x
80-50-250	15	185	-	95921003			x		x	x	x	
80-50-250	15	185	-	95921006								x
80-50-250	18.5	185	-	95921006			x		x	x	x	x
80-50-250	30	205	95921109	98042208			x					
80-50-250	30	205	-	98042208			x		x	x	x	x
80-50-250	37	205	95921109	98042208			x					
80-50-250	37	205	-	98042208			x		x	x	x	x
80-50-315	30	225	-	95921008			x		x	x	x	x
80-50-315	37	225	-	95921008			x		x	x	x	x
80-50-315	45	230	95921107	98042208			x		x	x	x	x
80-50-315	55	285	98271138	95921013			x		x			x
80-50-315	55	285	98271138	95921026						x	x	
80-65-125	5.5	157	95921105	-		x	x		x	x		x
80-65-125	7.5	157	95921105	-		x		x	x	x		x
80-65-160	11	185	95921105	95921003		x						
80-65-160	11	185	-	95921003			x		x	x	x	x
80-65-160	15	185	-	95921003	x		x		x	x	x	
80-65-160	15	185	-	95921006								x
100-65-200	11	185	-	95921003			x		x	x	x	x

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷⁾		Support blocks for pump and/or motor are available for motors with X							
			Support block under pump	Support block under motor	E-motor				Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H		
100-65-200	15	185	-	95921003	x		x		x	x	x	
100-65-200	15	185	-	95921006							x	
100-65-200	18.5	185	-	95921006	x		x		x	x	x	x
100-65-200	30	205	95921109	98042208			x					
100-65-200	30	205	-	98042208			x		x	x	x	x
100-65-200	37	205	95921109	98042208			x					
100-65-200	37	205	-	98042208			x		x	x	x	x
100-65-250	30	205	95921117	98042208			x		x	x	x	x
100-65-250	37	205	95921117	98042208			x		x	x	x	x
100-65-250	45	235	95921113	95921010			x		x	x	x	x
100-65-250	55	300	98271139	95921014			x		x			x
100-65-250	55	300	98271139	-					x	x		
100-65-250	75	300	98271139	95921014					x	x		
100-65-250	75	300	98271139	95921016			x		x		x	
100-65-315	55	285	98271151	95921013			x		x		x	
100-65-315	55	285	98271151	95921026					x	x		
100-65-315	75	285	98271151	95921013					x	x		
100-65-315	75	285	98271151	95921015			x		x		x	
100-65-315	90	285	98271151	95921015					x	x		
100-65-315	90	285	98271151	95921017			x		x		x	
100-65-315	110	285	98271151	95921017					x	x		
100-65-315	110	345	98271152	95921019			x		x		x	
100-80-125	11	185	95921109	95921003			x		x	x	x	x
100-80-160	11	185	-	95921003			x		x	x	x	x
100-80-160	15	185	95921109	95921003	x							
100-80-160	15	185	-	95921003	x	x		x	x	x		
100-80-160	15	185	-	95921006							x	
100-80-160	18.5	185	-	95921006		x		x	x	x	x	
125-80-160	11	185	-	95921003		x		x	x	x	x	
125-80-160	15	185	-	95921003		x		x	x	x	x	
125-80-160	15	185	-	95921006			x		x	x	x	x
125-80-160	18.5	185	-	95921006	x		x		x	x	x	x
125-80-160	30	205	95921109	98042208			x					
125-80-160	30	205	-	98042208		x		x	x	x	x	
125-80-200	30	205	95921109	98042208		x		x	x	x	x	
125-80-200	37	205	95921109	98042208		x		x	x	x	x	
125-80-200	45	230	95921122	98042208		x		x	x	x	x	
125-80-200	55	280	98271153	95921012		x		x				x
125-80-200	55	280	98271153	-					x	x		
125-80-250	45	230	95921117	98042208		x		x	x	x	x	
125-80-250	55	285	98271151	95921013		x		x			x	
125-80-250	55	285	98271151	95921026					x	x		
125-80-250	75	285	98271151	95921013		x		x	x	x	x	
125-80-250	75	285	98271151	95921015		x		x			x	
125-80-250	90	285	98271151	95921015					x	x		
125-80-250	90	285	98271151	95921017		x		x			x	
125-80-315	90	285	95921113	95921015					x	x		
125-80-315	90	285	95921113	95921017		x		x			x	
125-80-315	110	285	95921113	95921017					x	x		
125-80-315	110	350	98271139	95921020		x		x			x	
125-80-315	132	350	98271139	95921023		x		x			x	
125-80-315	132	350	98271139	-					x	x		

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷⁾		Support blocks for pump and/or motor are available for motors with X							
			Support block under pump	Support block under motor	E-motor				Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H		
125-80-315	160	350	98271139	95921023					x		x	
125-80-315	160	350	98271139	95921025				x				
125-80-315	160	350	98271139	-					x	x		
125-100-160	22	200	-	95921005			x		x	x	x	
125-100-160	22	260	98271151	95921056				x			x	
125-100-160	30	205	95921117	98042208			x		x	x	x	x
125-100-160	37	205	95921117	98042208			x		x	x	x	x
125-100-200	30	205	95921117	98042208			x		x	x	x	x
125-100-200	37	205	95921117	98042208			x		x	x	x	x
125-100-200	45	235	95921113	95921010			x		x	x	x	x
125-100-200	55	300	98271139	95921014			x		x			x
125-100-200	55	300	98271139	-				x	x		x	
125-100-200	75	300	98271139	95921014				x		x	x	
125-100-200	75	300	98271139	95921016			x		x		x	
125-100-250	55	285	98271151	95921013			x		x		x	
125-100-250	55	285	98271151	95921026				x	x		x	
125-100-250	75	285	98271151	95921013				x	x		x	
125-100-250	75	285	98271151	95921015			x		x		x	
125-100-250	90	285	98271151	95921015				x	x		x	
125-100-250	90	285	98271151	95921017			x		x		x	
125-100-250	110	285	98271151	95921017				x	x		x	
125-100-250	110	345	98271152	95921019			x		x		x	
125-100-250	132	345	98271152	95921022			x		x		x	
125-100-250	132	345	98271152	-				x	x			
125-100-315	110	285	95921113	95921017				x	x			
125-100-315	110	350	98271139	95921020			x		x		x	
125-100-315	132	350	98271139	95921023			x		x		x	
125-100-315	132	350	98271139	-				x	x			
125-100-315	160	350	98271139	95921023				x			x	
125-100-315	160	350	98271139	95921025			x					
125-100-315	160	350	98271139	-				x	x		x	
125-100-315	200	350	98271139	95921023				x			x	
125-100-315	200	350	98271139	95921025			x					
125-100-315	200	350	98271139	-				x	x		x	
150-125-200	45	250	-	95921009			x		x	x	x	x
150-125-200	45	285	95921113	95921060								
150-125-200	55	285	95921113	95921013			x		x		x	
150-125-200	55	285	95921113	95921026				x	x			
150-125-200	75	285	95921113	95921013				x	x			
150-125-200	75	285	95921113	95921015			x		x		x	
150-125-200	90	285	95921113	95921015				x	x		x	
150-125-200	90	285	95921113	95921017			x		x		x	
150-125-200	110	285	95921113	95921017				x	x		x	
150-125-200	110	350	98271139	95921020			x		x		x	
150-125-250	90	285	95921113	95921015				x	x		x	
150-125-250	90	285	95921113	95921017			x		x		x	
150-125-250	110	285	95921113	95921017				x	x		x	
150-125-250	110	350	98271139	95921020			x		x		x	
150-125-250	132	350	98271139	95921023			x		x		x	
150-125-250	132	350	98271139	-				x	x			
150-125-250	160	350	98271139	95921023				x			x	
150-125-250	160	350	98271139	95921025			x				x	

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷¹⁾		Support blocks for pump and/or motor are available for motors with X						
			Support block under pump	Support block under motor	E-motor			Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H	MMG-H
150-125-250	160	350	98271139	-					x	x	
150-125-250	200	350	98271139	95921023				x		x	
150-125-250	200	350	98271139	95921025			x				
150-125-250	200	350	98271139	-				x	x	x	
150-125-315	132	340	99715185	95921021			x		x		x
150-125-315	132	340	99715185	-				x	x	x	
150-125-315	160	340	99715185	95921021			x		x		x
150-125-315	160	340	99715185	95921024			x		x	x	
150-125-315	160	340	99715185	-				x	x	x	
150-125-315	200	340	99715185	95921021			x		x		x
150-125-315	200	340	99715185	95921024			x				
150-125-315	200	340	99715185	-				x	x	x	
200-150-200	75	280	-	95921012				x	x	x	
200-150-200	110	340	99715185	95921018			x		x		x
200-150-250	132	340	99715185	95921021			x		x		x
200-150-250	132	340	99715185	-				x	x	x	
200-150-250	160	340	99715185	95921021			x		x		x
200-150-250	160	340	99715185	95921024			x				
200-150-250	160	340	99715185	-				x	x	x	
200-150-250	200	340	99715185	95921021			x		x		x
200-150-250	200	340	99715185	95921024			x				
200-150-250	200	340	99715185	-				x	x	x	
200-150-315.1	160	355	95921120	98189151			x	x	x		x
200-150-315.1	160	355	95921120	98189139				x	x	x	
200-150-315.1	200	355	95921120	98189151			x	x	x		x
200-150-315.1	200	355	95921120	98189139				x	x	x	
200-150-315.2	160	335	95921120	98189151			x	x	x		x
200-150-315.2	160	335	95921120	98189139			x	x	x		x
200-150-315.2	200	335	95921120	98189151			x	x	x		x
200-150-315.2	200	335	95921120	98189139				x	x	x	
200-150-315	160	335	95921121	98189151			x				
200-150-315	160	335	95921121	-				x	x		x
200-150-315	200	335	95921121	98189151			x				
200-150-315	200	335	95921121	-				x	x		x

71) Always order two of the product numbers in the list as the pump/motor needs to be supported on both sides.

NBG, 4-pole, 50 Hz

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷²⁾		Support blocks for pump and/or motor are available for motors with X							
					E-motor				Standard motor			
			Support block under pump	Support block under motor	MGE	MG	Siemens	MMG-E	IE1	IE2	IE2 / IE3	MMG-H
IE1	IE3	IE3	IE2	IE1	IE2	IE2	IE3	IE1	IE2	IE2 / IE3	MMG-H	
80-50-315	11	240	95921116	95921047			x		x	x	x	x
80-50-315	11	240	95921116	95921053		x						
100-65-315	11	240	95921118	95921047			x		x	x	x	x
100-65-315	11	240	95921118	95921053		x						
100-65-315	15	240	95921118	95921053		x	x	x	x	x	x	x
125-80-250	11	240	95921118	95921047			x		x	x	x	x
125-80-250	11	240	95921118	95921053		x						
125-80-315	11	260	95921112	95921049			x		x	x	x	x
125-80-315	11	260	95921112	95921055		x						
125-80-315	15	260	95921112	95921055		x	x	x	x	x	x	x
125-80-315	18.5	260	95921112	95921051		x	x	x	x	x	x	x
125-80-315	22	260	95921112	95921051		x						
125-80-315	22	260	95921112	95921056				x	x	x	x	x
125-80-400	18.5	280	-	95921052			x	x	x	x	x	x
125-80-400	22	280	-	95921052		x						
125-80-400	22	280	-	95921057				x	x	x	x	x
125-80-400	30	300	95921115	95921063			x	x	x	x	x	x
125-80-400	37	285	95921117	95921060			x	x	x	x	x	x
125-80-400	45	280	-	92659431			x	x	x	x	x	x
125-80-400	45	285	95921117	95921060		x						
125-100-200	11	200	-	95921046			x	x	x	x	x	x
125-100-200	11	200	-	99715188		x						
125-100-250	11	240	95921118	95921047			x	x	x	x	x	x
125-100-250	11	240	95921118	95921053		x						
125-100-250	15	240	95921118	95921053		x	x	x	x	x	x	x
125-100-315	15	260	95921112	95921055		x	x	x	x	x	x	x
125-100-315	18.5	260	95921112	95921051		x	x	x	x	x	x	x
125-100-315	22	260	95921112	95921051		x						
125-100-315	22	260	95921112	95921056				x	x	x	x	x
125-100-315	30	260	95921112	95921062			x	x	x	x	x	x
125-100-400	22	280	-	95921052		x						
125-100-400	22	280	-	95921057				x	x	x	x	x
125-100-400	30	300	95921121	95921063			x	x	x	x	x	x
125-100-400	37	285	95921119	95921060			x	x	x	x	x	x
125-100-400	45	280	-	92659431			x	x	x	x	x	x
125-100-400	45	285	95921119	95921060		x						
125-100-400	55	280	-	95921012			x	x	x	x	x	x
125-100-400	55	305	95921099	92659431				x	x	x	x	x
150-125-200	11	260	95921112	95921049			x	x	x	x	x	x
150-125-200	11	260	95921112	95921055		x						
150-125-200	15	260	95921112	95921055		x	x	x	x	x	x	x
150-125-250	11	260	95921112	95921049		x	x	x	x	x	x	x
150-125-250	11	260	95921112	95921055		x						
150-125-250	15	260	95921112	95921055		x	x	x	x	x	x	x
150-125-250	18.5	260	95921112	95921051		x	x	x	x	x	x	x
150-125-250	22	260	95921112	95921051		x						
150-125-250	22	260	95921112	95921056				x	x	x	x	x
150-125-250	30	260	95921112	95921062			x	x	x	x	x	x
150-125-315	18.5	280	-	95921052	x		x	x	x	x	x	x
150-125-315	22	280	-	95921052	x							

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷²⁾		Support blocks for pump and/or motor are available for motors with X						
			Support block under pump	Support block under motor	E-motor			Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H	MMG-H
150-125-315	22	280	-	95921057				x	x	x	x
150-125-315	30	300	95921121	95921063				x	x	x	x
150-125-315	37	285	95921119	95921060				x	x	x	x
150-125-315	45	280	-	92659431				x	x	x	x
150-125-315	45	285	95921119	95921060				x			
150-125-400	37	325	95921120	95921061				x	x	x	x
150-125-400	45	325	95921120	95921061				x			
150-125-400	45	325	95921120	95921073				x	x	x	x
150-125-400	55	315	-	99716002				x	x		x
150-125-400	55	350	95921101	95921073					x	x	
150-125-400	75	315	-	95921065				x	x		x
150-125-400	75	315	-	99716002					x	x	
150-125-400	90	315	-	95921065				x		x	
150-125-400	90	315	-	95921068					x		x
150-125-500	55	400	-	92659432				x	x		x
150-125-500	55	400	-	92659448					x	x	
150-125-500	75	400	-	95921082				x	x		x
150-125-500	75	400	-	92659432					x	x	
150-125-500	90	400	-	95921082				x		x	
150-125-500	90	400	-	95921083					x		x
150-125-500	110	400	-	95921083						x	
150-125-500	110	400	-	92659433				x	x		x
150-125-500	132	400	-	92659434					x		x
150-125-500	132	435	95921101	95921070				x			
150-125-500	160	400	-	92659434				x	x		x
200-150-200	11	300	95921121	95921048				x	x	x	x
200-150-200	11	300	95921121	95921054		x					
200-150-200	15	300	95921121	95921054	x	x	x	x	x	x	x
200-150-250	15	300	95921121	95921054	x	x	x	x	x	x	x
200-150-250	18.5	280	-	95921052				x	x	x	x
200-150-250	22	280	-	95921057					x	x	x
200-150-250	30	300	95921121	95921063				x	x	x	x
200-150-250	37	285	95921119	95921060				x	x	x	x
200-150-250	45	280	-	92659431					x	x	x
200-150-250	45	285	95921119	95921060				x			
200-150-315.1	18.5	320	95921119	92659443	x			x	x	x	x
200-150-315.1	22	320	95921119	95921085				x	x	x	x
200-150-315.1	30	320	95921119	95921087				x	x	x	x
200-150-315.1	37	325	95921120	95921059				x	x	x	x
200-150-315.1	45	325	95921120	95921061				x			
200-150-315.1	45	325	95921120	95921073					x	x	x
200-150-315.1	55	315	-	99716002				x	x		x
200-150-315.1	55	350	95921101	95921073					x	x	
200-150-315.2	22	320	95921119	95921085				x	x	x	x
200-150-315.2	30	320	95921119	95921087				x	x	x	x
200-150-315.2	37	325	95921120	95921059				x	x	x	x
200-150-315.2	45	325	95921120	95921061				x			
200-150-315.2	45	325	95921120	95921073					x	x	x
200-150-315.2	55	315	-	99716002				x	x		x
200-150-315.2	55	350	95921101	95921073					x	x	
200-150-315.2	75	315	-	95921065				x	x		x

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷²⁾		Support blocks for pump and/or motor are available for motors with X						
			Support block under pump	Support block under motor	E-motor			Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H	MMG-H
200-150-315.2	75	315	-	99716002				x	x		
200-150-315	37	325	95921120	95921061			x	x	x	x	x
200-150-315	45	325	95921120	95921061			x				
200-150-315	45	325	95921120	95921073				x	x	x	x
200-150-315	55	315	-	99716002			x	x			x
200-150-315	55	350	95921101	95921073				x	x		
200-150-315	75	315	-	95921065			x	x			x
200-150-315	75	315	-	99716002				x	x	x	
200-150-315	90	315	-	95921065			x			x	
200-150-315	90	315	-	95921068				x		x	
200-150-400	55	315	-	99716002			x	x			x
200-150-400	55	350	95921101	95921073				x	x		
200-150-400	75	315	-	95921065			x	x			x
200-150-400	75	315	-	99716002				x	x	x	
200-150-400	90	315	-	95921065			x			x	
200-150-400	90	315	-	95921068				x		x	
200-150-400	110	315	-	95921068				x			x
200-150-400	110	335	95921121	98271155			x	x			x
200-150-400	132	335	95921121	98189151				x			x
200-150-400	132	335	95921121	-			x		x	x	
200-150-400	160	335	95921121	98189151			x	x			x
200-150-400	160	335	95921121	-				x	x		
200-150-500	132	400	-	92659434				x			x
200-150-500	132	435	95921101	95921070			x				
200-150-500	160	400	-	92659434			x	x			x
200-150-500	200	400	-	92659434			x	x			x
250-200-400	37	400	-	92659419			x	x	x	x	x
250-200-400	45	400	-	92659419			x				
250-200-400	45	400	-	92659435				x	x	x	x
250-200-400	55	400	-	92659432			x	x			x
250-200-400	55	400	-	92659448				x	x		
250-200-400	75	400	-	95921082			x	x			x
250-200-400	75	400	-	92659432				x	x		
250-200-400	90	400	-	95921082			x		x		
250-200-400	90	400	-	95921083				x			x
250-200-400	110	400	-	95921083					x		
250-200-400	110	400	-	92659433			x	x			x
250-200-400	132	400	-	92659434				x			x
250-200-400	132	435	95921101	95921070			x				
250-200-450	75	400	-	95921082			x	x			x
250-200-450	75	400	-	92659432				x	x	x	
250-200-450	90	400	-	95921082			x		x		
250-200-450	90	400	-	95921083				x		x	
250-200-450	110	400	-	95921083					x		
250-200-450	110	400	-	92659433			x	x			x
250-200-450	132	400	-	92659434				x			x
250-200-450	132	435	95921101	95921070			x				
250-200-450	160	400	-	92659434			x	x			x
300-250-350	37	450	-	92659436			x	x	x	x	x
300-250-350	37	450	-	-				x			
300-250-350	45	450	-	92659436			x				
300-250-350	45	450	-	92659437			x	x	x	x	

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷²⁾		Support blocks for pump and/or motor are available for motors with X						
			Support block under pump	Support block under motor	E-motor			Standard motor			
					MGE	MG	Siemens	MMG-E	MMG-G	MMG-H	MMG-H
300-250-350	55	450	-	92659438			x	x		x	
300-250-350	55	450	-	92659449					x	x	
300-250-350	75	450	-	92659438					x	x	
300-250-350	75	450	-	92659439			x	x		x	
300-250-350	90	450	-	92659439			x		x		
300-250-350	90	450	-	92659440				x		x	
300-250-400	45	450	-	92659436			x				
300-250-400	45	450	-	92659437				x	x	x	x
300-250-400	55	450	-	92659438			x	x		x	
300-250-400	55	450	-	92659449				x	x	x	
300-250-400	75	450	-	92659438				x	x	x	
300-250-400	75	450	-	92659439			x	x		x	
300-250-400	90	450	-	92659439			x		x		
300-250-400	90	450	-	92659440				x		x	
300-250-400	110	450	-	92659441			x	x		x	
300-250-400	110	450	-	92659440					x		
300-250-400	132	450	-	92659442				x		x	
300-250-400	160	450	-	92659442			x	x		x	
300-250-450	75	450	-	92659438				x	x	x	x
300-250-450	75	450	-	92659439			x	x		x	
300-250-450	90	450	-	92659439			x		x		
300-250-450	90	450	-	92659440				x		x	
300-250-450	110	450	-	92659441			x	x		x	
300-250-450	110	450	-	92659440					x		
300-250-450	132	450	-	92659442				x		x	
300-250-450	160	450	-	92659442			x	x		x	
300-250-450	200	450	-	92659442			x	x		x	
300-250-500	160	450	-	92659442			x				
300-250-500	200	450	-	92659442			x				
350-300-305	75	480	-	99715190			x				
350-300-305	90	480	-	99715190			x				
350-300-305	110	480	-	99715191			x				
350-300-305	132	480	-	99715192			x				
350-300-305	160	480	-	99715192			x				

72) Always order two of the product numbers in the list as the pump/motor needs to be supported on both sides.

NBG, 6-pole, 50 Hz

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷³⁾		Support blocks for pump and/or motor are available for motors with X				
			Support block under pump	Support block under motor	Standard motor				MMG-H
					Siemens	MMG-E	MMG-G	MMG-H	
125-100-315	7.5	260	95921112	95921049	x	x	x	x	
125-100-315	11	260	95921112	95921055	x	x	x	x	x
125-100-400	7.5	300	95921121	95921048	x	x	x	x	
125-100-400	11	300	95921121	95921054	x	x	x	x	x
125-100-400	15	280	-	95921052	x				
125-100-400	15	280	-	95921057		x	x	x	x
150-125-250	7.5	260	95921112	95921049	x	x	x	x	
150-125-315	7.5	300	95921121	95921048	x	x	x	x	
150-125-315	11	300	95921121	95921054	x	x	x	x	x
150-125-315	15	280	-	95921052	x				
150-125-315	15	280	-	95921057		x	x	x	x
150-125-400	11	320	95921119	95921084	x	x	x	x	x
150-125-400	15	320	95921119	95921085		x	x	x	x
150-125-400	15	320	95921119	92659443	x				
150-125-400	18.5	320	95921119	95921087	x	x	x	x	x
150-125-400	22	320	95921119	95921087	x	x	x	x	x
150-125-400	30	325	95921120	95921061	x				
150-125-400	30	325	95921120	95921073		x	x	x	x
150-125-500	18.5	400	-	99715189	x	x	x	x	x
150-125-500	22	400	-	99715189	x	x	x	x	x
150-125-500	30	400	-	92659419	x				
150-125-500	30	400	-	92659435		x	x	x	x
150-125-500	37	400	-	92659432	x	x			x
150-125-500	37	400	-	92659448			x	x	
150-125-500	45	400	-	95921082	x	x			x
150-125-500	45	400	-	92659432			x	x	
150-125-500	55	400	-	95921082	x			x	
150-125-500	55	400	-	95921083		x			x
200-150-250	7.5	300	95921121	95921048	x	x	x	x	
200-150-250	11	300	95921121	95921054	x	x	x	x	x
200-150-315.2	7.5	320	95921119	92659430	x	x	x	x	x
200-150-315.2	11	320	95921119	95921084	x	x	x	x	x
200-150-315.2	15	320	-	95921052	x	x	x	x	x
200-150-315.2	18.5	320	95921119	95921087	x	x	x	x	x
200-150-315	11	320	95921119	95921084	x	x	x	x	x
200-150-315	15	320	95921119	95921085		x	x	x	x
200-150-315	15	320	95921119	92659443	x				
200-150-315	18.5	320	95921119	95921087	x	x	x	x	x
200-150-315	22	320	95921119	95921087	x	x	x	x	x
200-150-315	30	325	95921120	95921061	x				
200-150-315	30	325	95921120	95921073		x	x	x	x
200-150-315	30	325	95921120	95921087	x	x	x	x	x
200-150-400	18.5	320	95921119	95921087	x	x	x	x	x
200-150-400	22	320	95921119	95921087	x	x	x	x	x
200-150-400	30	325	95921120	95921061	x				
200-150-400	30	325	95921120	95921073		x	x	x	x
200-150-400	37	315	-	99716002	x	x			x
200-150-400	37	350	95921101	95921073			x	x	
200-150-400	45	315	-	95921065	x	x			x
200-150-400	45	315	-	99716002		x	x		

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷³⁾		Support blocks for pump and/or motor are available for motors with X				
			Support block under pump	Support block under motor	Standard motor				MMG-H
					Siemens	MMG-E	MMG-G	IE2 / IE3	
200-150-500	37	400	-	92659432	x	x			x
200-150-500	37	400	-	92659448			x	x	
200-150-500	45	400	-	95921082	x	x			x
200-150-500	45	400	-	92659432			x	x	
200-150-500	55	400	-	95921082	x		x		
200-150-500	55	400	-	95921083		x			x
200-150-500	75	400	-	95921083			x		
200-150-500	75	400	-	92659433	x	x			x
250-200-400	15	400	-	92659444		x	x	x	x
250-200-400	18.5	400	-	99715189	x	x	x	x	x
250-200-400	22	400	-	99715189	x	x	x	x	x
250-200-400	30	400	-	92659419	x				
250-200-400	30	400	-	92659435		x	x	x	x
250-200-400	37	400	-	92659432	x	x			x
250-200-400	37	400	-	92659448			x	x	
250-200-450	18.5	400	-	99715189	x	x	x	x	x
250-200-450	22	400	-	99715189	x	x	x	x	x
250-200-450	30	400	-	92659419	x				
250-200-450	30	400	-	92659435		x	x	x	x
250-200-450	37	400	-	92659432	x	x			x
250-200-450	37	400	-	92659448			x	x	
250-200-450	45	400	-	95921082	x	x			x
250-200-450	45	400	-	92659432			x	x	
300-250-350	11	450	-	92659445	x	x	x	x	x
300-250-350	15	450	-	92659446		x	x	x	x
300-250-350	18.5	450	-	92659447	x	x	x	x	x
300-250-350	22	450	-	92659447	x	x	x	x	x
300-250-400	15	450	-	92659446		x	x	x	x
300-250-400	18.5	450	-	92659447	x	x	x	x	x
300-250-400	22	450	-	92659447	x	x	x	x	x
300-250-400	30	450	-	92659436	x				
300-250-400	30	450	-	92659437		x	x	x	x
300-250-400	37	450	-	92659438	x	x			x
300-250-400	37	450	-	92659449			x	x	
300-250-400	45	450	-	92659438			x	x	
300-250-400	45	450	-	92659439	x	x			x
300-250-450	18.5	450	-	92659447	x	x	x	x	x
300-250-450	22	450	-	92659447	x	x	x	x	x
300-250-450	30	450	-	92659436	x				
300-250-450	30	450	-	92659437		x	x	x	x
300-250-450	37	450	-	92659438	x	x			x
300-250-450	37	450	-	92659449			x	x	
300-250-450	45	450	-	92659438			x	x	
300-250-450	45	450	-	92659439	x	x			x
300-250-450	55	450	-	92659439	x			x	
300-250-450	55	450	-	92659440		x			x
300-250-500	45	450	-	92659438			x	x	
300-250-500	45	450	-	92659439	x	x			x
300-250-500	55	450	-	92659439	x			x	
300-250-500	55	450	-	92659440		x			x
300-250-500	75	450	-	92659441	x	x			x

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷³⁾		Support blocks for pump and/or motor are available for motors with X				
			Standard motor						
			Support block under pump	Support block under motor	Siemens	MMG-E	MMG-G	MMG-H	
300-250-500	75	450	-	92659440			x		
350-300-305	18.5	480	-	99715193	x				
350-300-305	22	480	-	99715193	x				
350-300-305	30	480	-	99715194	x				
350-300-305	37	480	-	99715195	x				
350-300-305	45	480	-	99715190	x				

⁷³⁾ Always order two of the product numbers in the list as the pump/motor needs to be supported on both sides.

NBG, 8-pole, 50 Hz

Pump type	P2 [kW]	Axial height with support blocks	Product number of support block ⁷⁴⁾		Support blocks for pump and/or motor are available for motors with X				
			Standard motor						
			Support block under pump	Support block under motor	Siemens	MMG-E	MMG-G	MMG-H	
350-300-305	11	480	-	99715196	x				
350-300-305	15	480	-	99715193	x				
350-300-305	18.5	480	-	99715194	x				

⁷⁴⁾ Always order two of the product numbers in the list as the pump/motor needs to be supported on both sides.

Certificates and reports

Grundfos offers a number of certificates and reports.

When a customer wants a certificate or a report, the request must be stated on the order.

The certificate or report will then be put onto the bill of materials and thus included in the product number of the pump.

Certificates or reports have to be confirmed for every order.

For more information on certificates and reports, see the data booklet "NB, NBG, NK, NKG, NBE, NBGE, NKE, NKGE - Custom-built pumps according to EN 733 and ISO 2858".

Short description	Standard
Certificate of compliance with the order	EN 10204 - 2.1
Grundfos document certifying that the pump supplied is in compliance with the order specifications.	
Test certificate - Non-specific inspection and testing	EN 10204 - 2.2
Certificate with inspection and test results of a non-specific pump	
Inspection certificate - Grundfos authorized department	EN 10204 - 3.1
Grundfos document certifying that the pump supplied is in compliance with the order specifications. Inspection and test results are mentioned in the certificate.	
Inspection certificate - External classifying society	EN 10204 - 3.2
Grundfos document certifying that the pump supplied is in compliance with the order specifications. Inspection and test results are mentioned in the certificate.	
Certificate from the surveyor is included:	
Lloyds Register EMEA (LR)	3.2
Inspection certificate DNV-GL	3.2
Bureau Veritas (BV)	3.2
American Bureau of Shipping (ABS)	3.2
Registro Italiano Navale Agenture (RINA)	3.2
China Class. Society (CCS)	3.2
Russian Maritime Register (RS)	3.2
Biro Klas. Indonesia (BKI)	3.2
United States Coast Guard (USCG)	3.2
Nippon Kaiji Koykai (NKK)	3.2
Pump performance - Curve test report	ISO 9906:2012
Performance curve test report - Grade 3B	
Pump performance - Duty point verification report	ISO 9906:2012
Duty point verification report - Grade 3B, Q&H	
Duty point verification report - Grade 3B, Q&H + Eta total	
Duty point verification report - Grade 3B, Q&H + P1	
Duty point verification report - Grade 2B, Q&H	
Duty point verification report - Grade 2B, Q&H + Eta total	
Duty point verification report - Grade 2B, Q&H + P1	
Duty point verification report - Grade 2U, Q&H	
Duty point verification report - Grade 2U, Q&H + Eta total	
Duty point verification report - Grade 2U, Q&H + P1	
Duty point verification report - Grade 1B, Q&H	
Duty point verification report - Grade 1B, Q&H + Eta total	
Duty point verification report - Grade 1B, Q&H + P1	
Duty point verification report - Grade 1E, Q&H	
Duty point verification report - Grade 1E, Q&H + Eta total	
Duty point verification report - Grade 1E, Q&H + P1	
Duty point verification report - Grade 1U, Q&H	
Duty point verification report - Grade 1U, Q&H + Eta total	
Duty point verification report - Grade 1U, Q&H + P1	
Other certificates/Reports	
Material specification report	
Material specification report + certificate from raw material supplier	
ATEX approved pump report	
PWIS-free certificate	
Vibration report	ISO 5199
Vibration report	ISO 10816
Impeller balancing report Grade 6.3	ISO 1940

23. Service

Some pump parts will become worn over time and need to be replaced. These parts can be ordered as service kits.

Service recommendations

To avoid unnecessary downtime, we recommend that you stock certain service parts. These service parts should be ordered together with the pump.

Information about service kits and recommended service parts can be found in the service kit catalogue.

In Grundfos Product Center, you can also search for the "Service offerings" data booklet, which gives relevant information about service issues.

24. Grundfos Product Center

Online search and sizing tool to help you make the right choice.

From the international view, you can select your specific country to view the product range available to you.

International view: <https://product-selection.grundfos.com>

All the information you need in one place

Performance curves, technical specifications, pictures, dimensional drawings, motor curves, wiring diagrams, spare parts, service kits, 3D drawings, documents, system parts. The Product Center displays any recent and saved items - including complete projects - right on the main page.

Downloads

On the product pages, you can download installation and operating instructions, data booklets, service instructions, etc., in PDF format.



When you select your country, you will see the menus below. Note that some menus may not be available depending on the country.

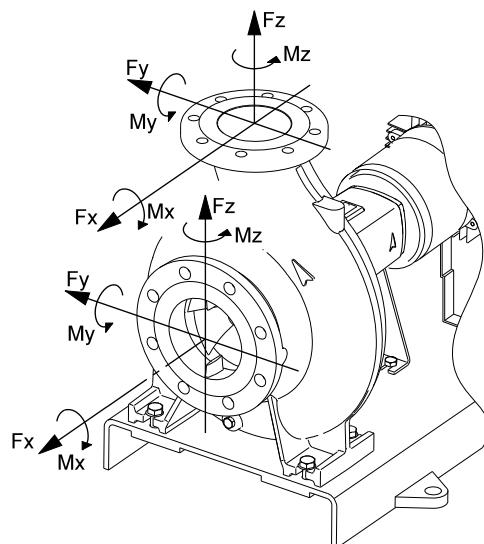
Example: <https://product-selection.grundfos.com/uk>

Pos. Description

- 1 **Products & services** enables you to find products and documents by typing a product number or name into the search field.
- 2 **Applications** enables you to choose an application to see how Grundfos can help you design and optimise your system.
- 3 **Products A-Z** enables you to look through a list of all the Grundfos products.
- 4 **Categories** enables you to look for a product category.
- 5 **Liquids** enables you to find pumps designed for aggressive, flammable or other special liquids.
- 6 **Product replacement** enables you to find a suitable replacement.
- 7 **WWW** enables you to select the country, which changes the language, the available product range and the structure of the website.
- 8 **Sizing** enables you to size a product based on your application and operating conditions.

Appendix A

A.1. Flange forces and torques



TM045621

Flange forces and torques

Cast iron flanges	Diameter DN	Force [N]				Torque [N·m]			
		Fy	Fz	Fx	$\Sigma F^1)$	My	Mz	Mx	$\Sigma M^1)$
Horizontal pump, x-axis, inlet port	25	245	298	263	455	210	245	315	455
	32	298	368	315	578	263	298	385	560
	40	350	438	385	683	315	368	455	665
	50	473	578	525	910	350	403	490	718
	65	595	735	648	1155	385	420	525	770
	80	718	875	788	1383	403	455	560	823
	100	945	1173	1050	1838	438	508	613	910
	125	1120	1383	1243	2170	525	665	735	1068
	150	1418	1750	1575	2643	613	718	875	1278
	200	1890	2345	2100	3658	805	928	1138	1680
	250	2700	3460	2980	5220	1260	1460	1780	2620
	300	3220	4000	3580	6260	1720	1980	2420	3560
	350	3760	4660	4180	7300	2200	2540	3100	4560
	400	4300	5320	4780	8340	2760	3180	3880	5720
	450	4840	5980	5380	9380	3400	3920	4780	7040
	500	5380	6640	5980	10420	4100	4720	5780	8520

Cast iron flanges	Diameter DN	Force [N]				Torque [N-m]			
		Fy	Fz	Fx	$\Sigma F^1)$	My	Mz	Mx	$\Sigma M^1)$
Horizontal pump, x-axis, outlet port	32	315	298	368	578	263	298	385	560
	40	385	350	438	683	315	368	455	665
	50	525	473	578	910	350	403	490	718
	65	648	595	735	1155	385	420	525	770
	80	788	718	875	1383	403	455	560	823
	100	1050	945	1173	1838	438	508	613	910
	125	1243	1120	1383	2170	525	665	735	1068
	150	1575	1418	1750	2748	613	718	875	1278
	200	2100	1890	2345	3658	805	928	1138	1680
	250	2980	2700	3340	5220	1260	1460	1780	2620
	300	3580	3220	4000	6260	1720	1980	2420	3920
	350	4180	3760	4660	7300	2200	2540	3100	4560
	400	4780	4300	5320	8340	2760	3180	3880	5720
	450	5380	5080	5980	9380	3400	3920	4780	7040
	500	5980	5380	6640	10420	4100	4720	5780	8520

1) ΣF and ΣM are vector sums of the forces and torques

Stainless steel flanges	Diameter DN	Force [N]				Torque [N-m]			
		Fy	Fz	Fx	$\Sigma F^2)$	My	Mz	Mx	$\Sigma M^2)$
Horizontal pump, x-axis, inlet port	25	490	595	525	910	420	490	630	910
	32	595	735	630	1155	525	595	770	1120
	40	700	875	770	1365	630	735	910	1330
	50	945	1155	1050	1820	700	805	980	1435
	65	1190	1470	1295	2310	770	840	1050	1540
	80	1435	1750	1575	2765	805	910	1120	1645
	100	1890	2345	2100	3675	875	1015	1225	1820
	125	2240	2765	2485	4340	1050	1330	1470	2135
	150	2835	3500	3150	5285	1225	1435	1750	2555
	200	3780	4690	4200	7315	1610	1855	2275	3360
	250	4725	6055	5215	9135	2205	2555	3115	4585
	300	5635	7000	6265	10955	3010	3465	4235	6230
	350	6580	8155	7315	12775	3850	4445	5425	7980
	400	7525	9310	8365	14595	4830	5565	6790	10010
	450	8470	10465	9415	16415	5950	6860	8365	12320
	500	9415	11620	10465	18235	7175	8260	10115	14910
Horizontal pump, x-axis, outlet port	32	630	595	735	1155	525	595	770	1120
	40	770	700	875	1365	630	735	910	1330
	50	1050	945	1155	1820	700	805	980	1435
	65	1295	1190	1470	2310	770	840	1050	1540
	80	1575	1435	1750	2765	805	910	1120	1645
	100	2100	1890	2345	3675	875	1015	1225	1820
	125	2485	2240	2765	4340	1050	1330	1470	2135
	150	3150	2835	3500	5495	1225	1435	1750	2555
	200	4200	3780	4690	7315	1610	1855	2275	3360
	250	5215	4725	5845	9135	2205	2555	3115	4585
	300	6265	5635	7000	10955	3010	3465	4235	6860
	350	7315	6580	8155	12775	3850	4445	5425	7980
	400	8365	7525	9310	14595	4830	5565	6790	10010
	450	9415	8890	10465	16415	5950	6860	8365	12320
	500	10465	9415	11620	18235	7175	8260	10115	14910

2) ΣF and ΣM are vector sums of the forces and torques

If not all loads reach the maximum permissible value, one of the values is allowed to exceed the normal limit.
Contact Grundfos for further information.

96653948 11.2023
ECM: 1381057

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 